





Minispot are cylindrical floodlights with very compact dimensions. With their minimalist design these luminaires are ideal for discrete installation on façades and for use in landscape lighting. Dimmable versions for 48 Volt power supply are available as well as luminaires that can be connected to 230 Volt directly. In addition, there are CASAMBI® ready versions with monochrome or RGBW LEDs that can be controlled with an app. With their wide choice of optics and wattages Minispot floodlights are versatile tools for accent lighting in exterior spaces.

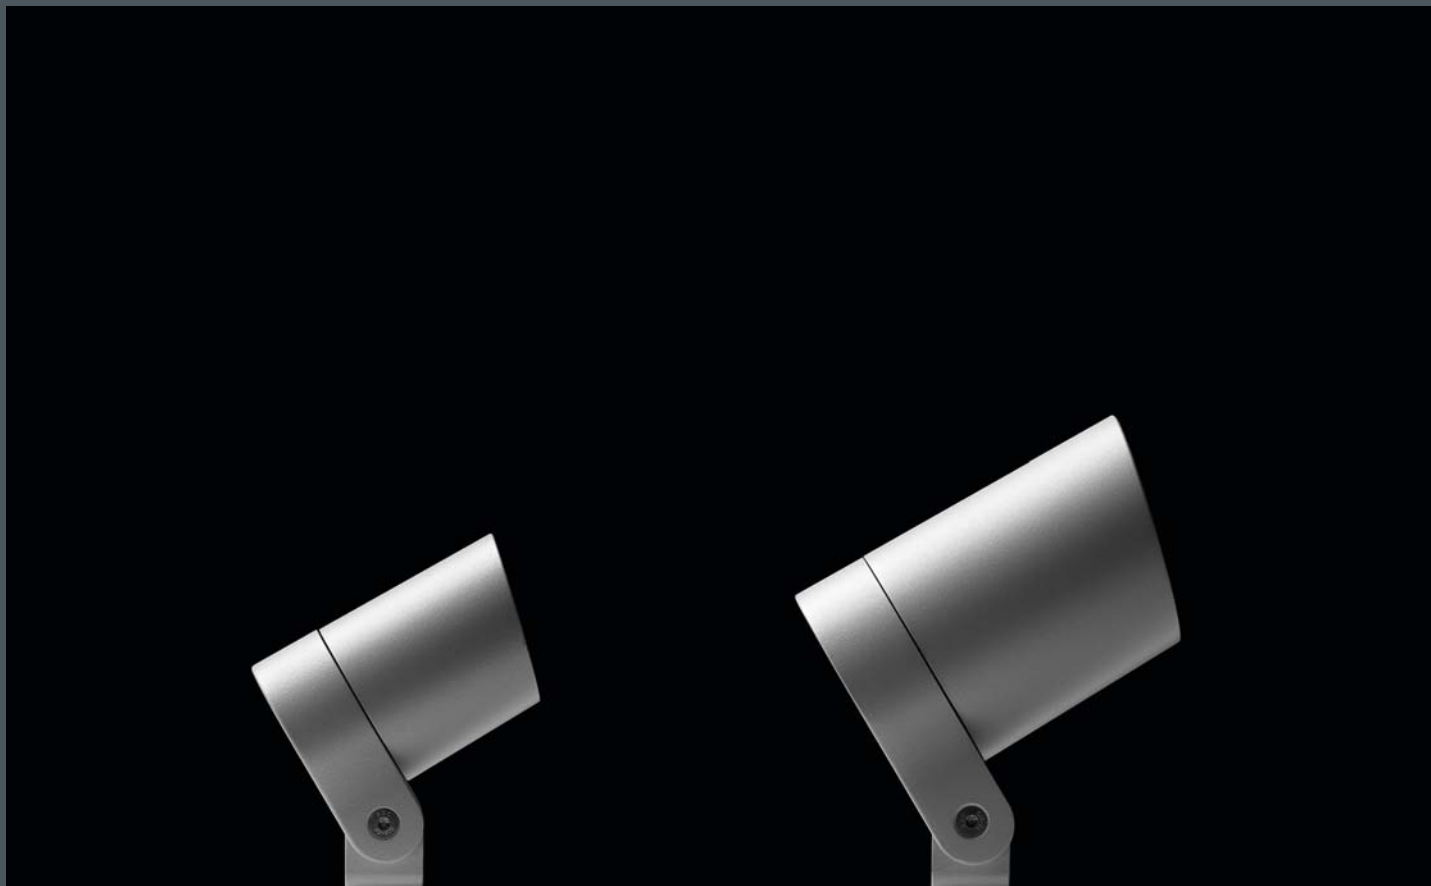


Minispot floodlights are available as versions with RGBW LEDs. Light colours can be set easily via the CASAMBI®-App without using any complicated DMX control system.

Narrow beam light distributions with reduced stray light are used for accent lighting on façades and for objects.

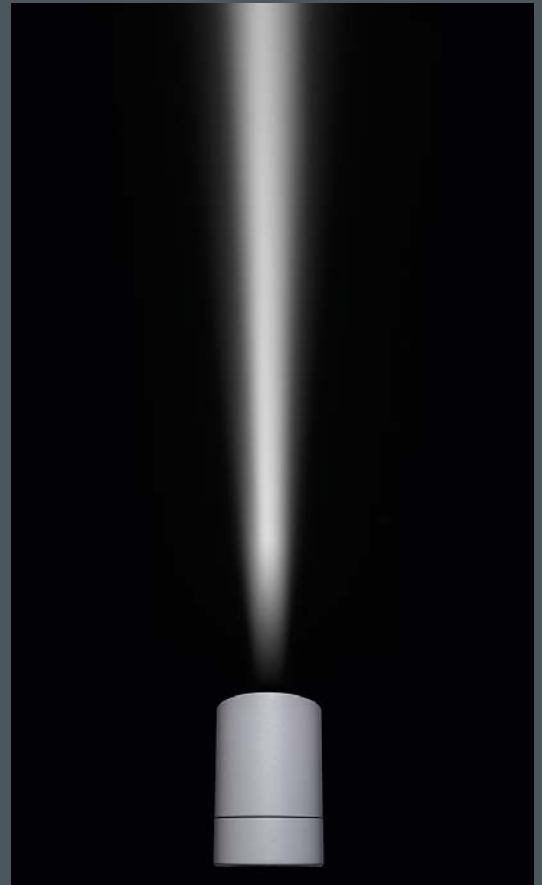

The slanted front of the luminaire serves as a glare shield. For improved maintenance rain and dirt can flow unimpeded over the flush lens.







Minispot 1

With high performance LED module,
CRI: > 80, Colour tolerance: max. 2 SDCM
Service life: L90/B10 > 50 000 h
protection class III , IP65 , IK08
windage area A_W 0,006 m²,
corrosion-resistant die cast aluminium housing AlSi12,
polyester powder coated,
with precise PMMA optic,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
2 stainless steel screws,
mounting bracket: 1 elongated hole Ø 7 mm,
spacing 12 mm, 1 centre hole Ø 8,5 mm,
tilt range 185°, M16 cable gland,
48 V DC: integral constant current control



Minispot 1, narrow beam (48 V DC, dimmable DALI)

Part number	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 924 046 119	black	0.4 kg	1 x LED 2 W warm white (3000 K)	148 lm	5°
8 924 066 119	white				
8 924 056 119	silver grey				



Minispot 1, linear beam spread, horizontal (48 V DC, dimmable DALI)



Part number	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 924 046 139	black	0.4 kg	1 x LED 2 W warm white (3000 K)	142 lm	C 0 – 180
8 924 066 139	white				C 90 – 270
8 924 056 139	silver grey				7°



. 2. Luminaire with linear beam spread, vertical (48 V DC, dimmable DALI)



Minispot 1, medium wide beam (48 V DC, dimmable DALI)

Part number	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 924 046 149	black	0.4 kg	1 x LED 2 W warm white (3000 K)	139 lm	25°
8 924 066 149	white				
8 924 056 149	silver grey				



Minispot 1, wide beam (48 V DC, dimmable DALI)

Part number	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 924 046 159	black	0.4 kg	1 x LED 2 W warm white (3000 K)	136 lm	44°
8 924 066 159	white				
8 924 056 159	silver grey				



Part number	Description
. 0..	Luminaire 48 V DC, on/off
. 7 . . .	Luminaire with warm white LED module (2700 K)
. 5 . . .	Luminaire with neutral white LED module (4000 K)



Accessories Minispot 1

Part number	Description
119 0 071 000	Power supply, 48 V, max. 70 W*, weather-resistant polycarbonate, grey, IP67
119 0 072 000	Power supply, 48 V, max. 150 W*, weather-resistant polycarbonate, grey, IP67

*additional wattages upon request

Part number	Description
129 0 901 000	honeycomb louvre, internal (factory fitted), to avoid glare
129 0 731 940	black
129 0 731 960	white
129 0 731 950	silver grey

Stainless steel earth spike,
for use in landscape lighting



LED

Luminaires available
in 2700 K or other colour temperatures upon request

