

erluna

suri adjustable
warm dim

circular product




IP65
IP54



UK
CA

suri adjustable
warm dim

circular product

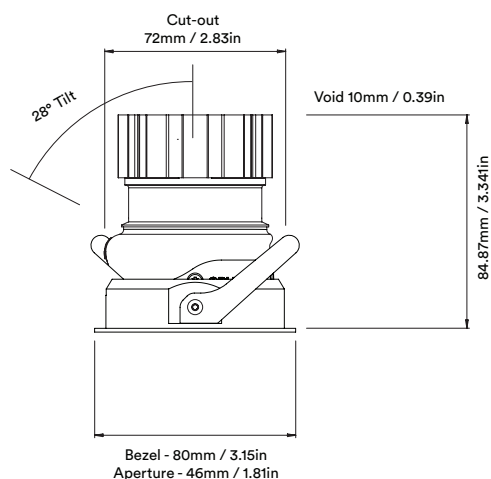

suri adjustable warm dim

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2

20yr support

recycled

spares & repairs

renew

Don't throw me away.
If this light has reached the end of its life or is in need of repair, please get in touch: +44 (0) 1923 889712

suri adjustable
warm dim

circular product

		1800K - 3000K			
		SOFT			
LIGHT VALUES		Medium	Wide	Flood	Wash
	Beam Width FWHM	26°	43°	50°	57°
	Initial Lumens	1030	1030	1030	1030
	Engine Lumens	819	809	791	798
	Luminaire Lumens	499	509	486	512
	Engine Lm/W	71	70	68	69
POWER	Luminaire Cd	1642	919	711	588
	Voltage	34V			
	Drive Current	300mA			
		Circuit Power (typ)			
		11.6W			
Binning	SDCM (Hot)	3			
	CRI (typ)(R9)	99 (98)			
	TM30 Rf Rg	Rf 94 Rg 100			
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)			
	Lifetime (Calculated)	L70 426,000hrs			
DRIVER	Protocols	Mains Dim / DALI / 0-10V / Non-dim			
	Dim to Dark	0.1% Lux			
	Distance from LED	20m / 65' (series wiring)			
	Emergency	Emergency packs available			

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
WD	SUR	WD	M	M	W	BB	F 54 E
		WD / Warm Dim	M / Mains Dim D / DALI 0 / 0-10v X / No Driver	M / Medium W / Wide F / Flood H / Wash	W / White RAL 9010 D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 C / Other RAL G / Polished Brass J / Antique Bronze K / Brushed Chrome L / Polished Chrome I / Polished Copper Z / Other Metallic	BB / Black 9005 WB / White 9010 DB / White 9003 EB / White 9016 CB / Other RAL MB / Polished Brass JB / Antique Bronze KB / BrushedChrome LB / PolishedChrome IB / Polished Copper ZB / Other Metallic	F / 60 min Fire Rated Plate 54 / IP54 65 / IP65 P / Sea & Spa IP65 *C / Constant Torsion E / 3hr Emergency H / Honeycomb N / Frosted Lens Z / LSZH Cable K / Click Connector

*NOTE: Fire Hood if used with constant torsion springs.