

erluna

**suri mini
adjustable
origin natural**

circular product





IP65
IP54



UK
CA

suri mini adjustable
origin natural

circular product

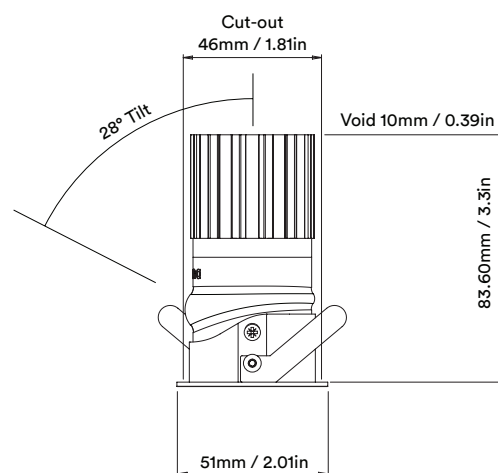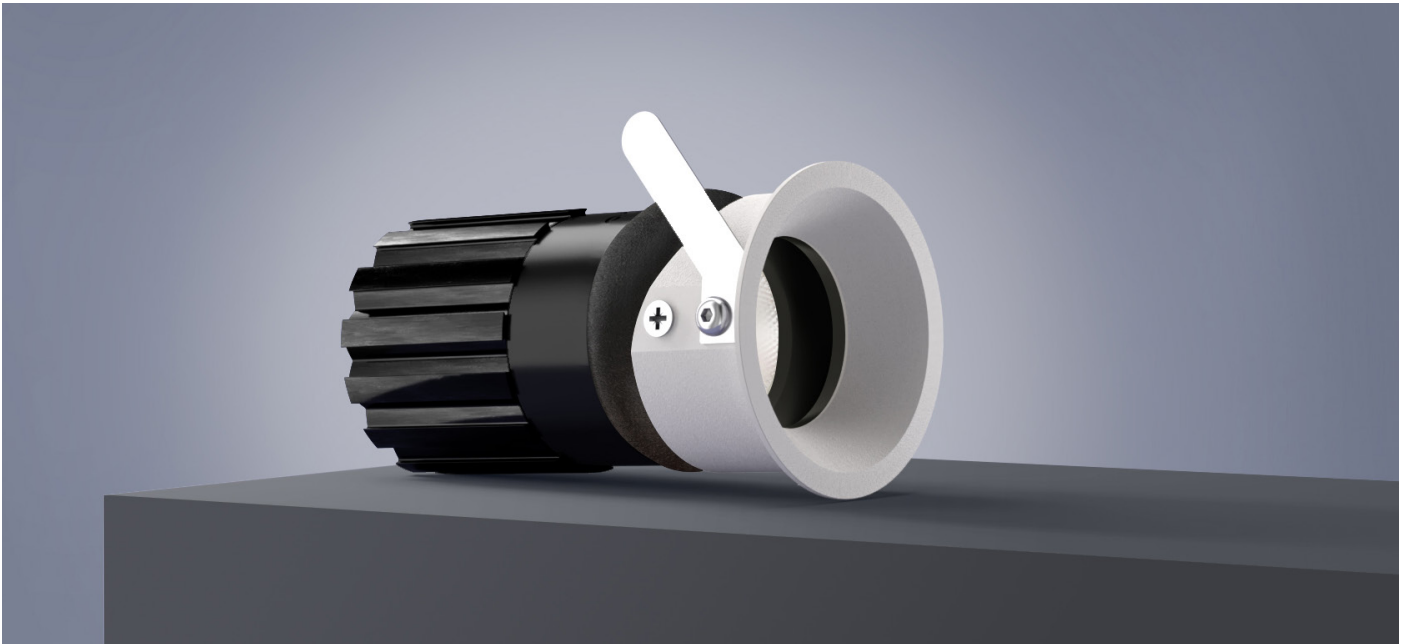

**Unit height increases by
12mm / 0.48in for SPOT and
both ELLIPTICAL BEAMS**

suri mini adjustable origin natural

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



suri mini adjustable
origin natural

circular product

2700K						
		SPOT	CRISP		SOFT	SPECIALITY
LIGHT VALUES	Beam Width FWHM	Spot 15°	Medium 18°	Wide 30°	Wash 35°	Elliptical 10×45°
	Initial Lumens	521	521	521	521	521
	Engine Lumens	207	462	462	417	290
	Luminaire Lumens	148	283	265	236	101
	Engine Lm/W	39	87	87	78	54
	Luminaire Cd	1706	1984	909	589	589
POWER	Voltage	17.6V				
	Drive Current	300mA				
	Circuit Power (typ)	5.3W				

3000K						
		SPOT	CRISP		SOFT	SPECIALITY
LIGHT VALUES	Beam Width FWHM	Spot 15°	Medium 18°	Wide 30°	Wash 35°	Elliptical 10×45°
	Initial Lumens	567	567	567	567	567
	Engine Lumens	236	483	475	442	176
	Luminaire Lumens	148	299	278	248	125
	Engine Lm/W	44	91	90	83	33
	Luminaire Cd	1849	2200	1000	615	610
POWER	Voltage	17.6V				
	Drive Current	300mA				
	Circuit Power (typ)	5.3W				

DRIVER	Binning SDCM (Hot)	2
	CRI (typ)(R9)	98 (99)
	TM30 Rf Rg	Rf 97.7 Rg 100.4
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
	Lifetime (Calculated)	L70 426,000hrs
	Protocols	Mains Dim / DALI / 0-10V / Non-dim
DRIVER	Dim to Dark	0.1% Lux
	Distance from LED	20m / 65' (series wiring)
	Emergency	Emergency packs available

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
NL	- SURM -	27	M	M	- W -	BB	F 54
		27 / 2700K 30 / 3000K 40 / 4000K*	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	M / Medium W / Wide T / Soft S / Spot L / Elliptical Linear O / Elliptical Oval	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL V / Dark Bronze* T / Medium Bronze* R / Light Bronze* Y / Burnished Brass* G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic	WB / White RAL 9010 DB / White RAL 9003 BB / Black RAL 9005 CB / Other RAL VB / Dark Bronze TB / Medium Bronze RB / Light Bronze YB / Burnished Brass GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic	F / 60 min Fire Rated Plate 54 / IP54 65 / IP65 P / Sea & Spa IP65 C / Constant Torsion** H / Honeycomb N / Frosted Lens Z / LSZH Cable K / Click Connector F- / 60 min Fire Rated Hood
		*NOTE:increase 3000K by 7%					
							* - Fire Rated Hood must be used with Dark Bronze, Medium Bronze, Light Bronze and Burnished Brass Bezels ** - NOTE: Fire Hood if used with constant torsion springs.