


|          |
|----------|
| Date     |
| Customer |
| Project  |
| Type     |

Impulse Round Wall 1x LED DALI/Push-Dim DI



Impulse Round Wall expresses a unique experience in your space, where bows of shadow and light create depth and accentuate architectural features all around.




Specifications

|                                 |                                                       |
|---------------------------------|-------------------------------------------------------|
| Material                        |                                                       |
| Light Source Type               | LED                                                   |
| LED Type                        | LED PCB IMPULSE                                       |
| LED technology                  | LED PCB                                               |
| CRI                             | Min. 90                                               |
| Colour Temperature              | 2700K/3000K                                           |
| Lifetime                        | L80B10 @50,000 Hours                                  |
| Lamp Included                   | Yes                                                   |
| Number of Light Sources         | 1                                                     |
| CIE flux code                   | 0 0 0 0 72                                            |
| Binning (SDCM)                  | 3                                                     |
| Light Direction                 | Up, Down                                              |
| Measured beam angle (°)         | 120.0                                                 |
| Input Voltage                   | 230V                                                  |
| Luminaire power (W)             | 7.7                                                   |
| Electrical Class                | I                                                     |
| IP Rating                       | 20                                                    |
| Glow wire rating (°C)           | 960                                                   |
| Dimming Protocol                | DALI, Push-Dim                                        |
| DALI Standard                   | DALI-2                                                |
| Indoor/Outdoor                  | Indoor                                                |
| Application                     | Wall                                                  |
| Mounting                        | Surface                                               |
| Adjustability                   | Not Applicable                                        |
| Distance to Lighted Object (m)  | 0,1                                                   |
| Primary Colour & Primary Finish | Black Structure, Grey White Structure, Cast Grey Matt |
| Gross weight (g)                | 1010.0                                                |
| Delivered lumens (lm)           | 459 - 630lm                                           |
| Efficacy (lm/W)                 | 60                                                    |
| Glare rating                    | 1                                                     |

Specifications

TM30 & CRI diagram

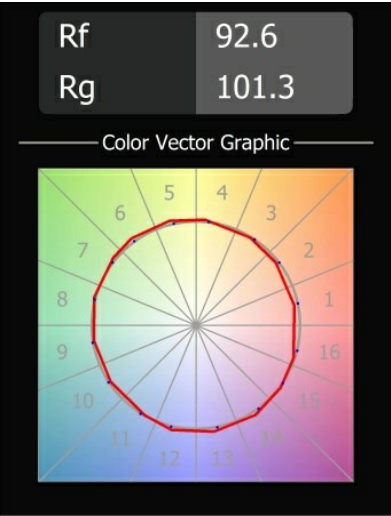

Light distribution & beam diagram

