


Date

Customer


Project

Type

Impulse Round Wall 1x LED Trailing Edge DI

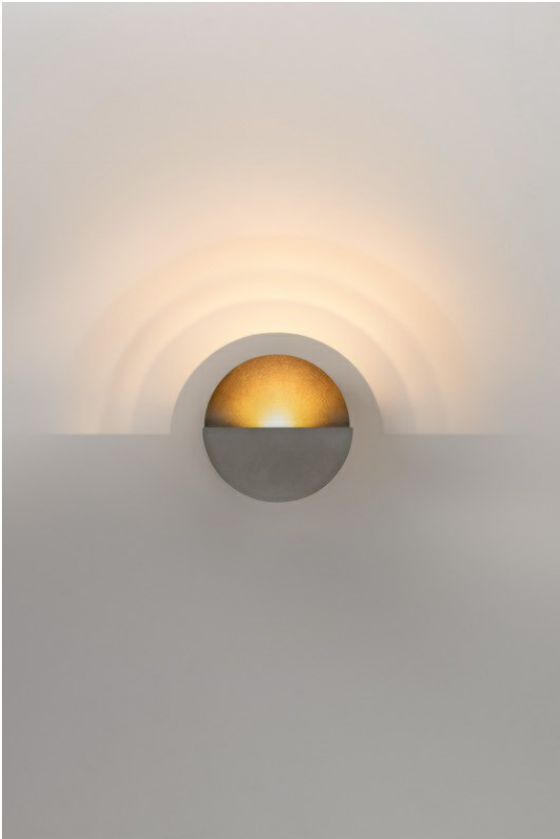

Impulse Round Wall expresses a unique experience in your space, where bows of shadow and light create depth and accentuate architectural features all around.




Specifications

Material	
Light Source Type	LED
LED Type	LED PCB IMPULSE
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K/3000K
Lifetime	L80B10 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	0 0 11 0 77
Binning (SDCM)	3
Light Direction	Up, Down
Measured beam angle (°)	120.0
Input Voltage	230V
Luminaire power (W)	7.5
Electrical Class	I
IP Rating	20
Glow wire rating (°C)	960
Dimming Protocol	Trailing Edge
Indoor/Outdoor	Indoor
Application	Wall
Mounting	Surface
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Black Structure, Grey White Structure, Cast Grey Matt
Gross weight (g)	963.0
Delivered lumens (lm)	459 - 630lm
Efficacy (lm/W)	65
Glare rating	1

Specifications

TM30 & CRI diagram

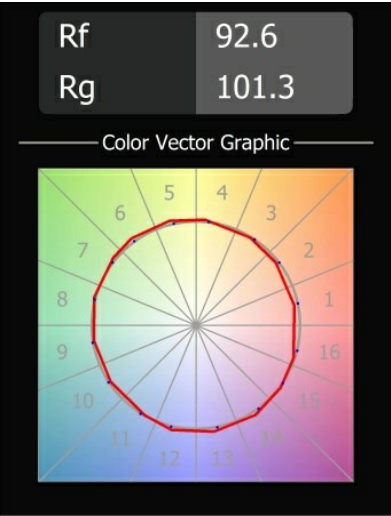

Light distribution & beam diagram

