


75

Adjustable Mirror cone

Recessed Downlight Adjustable




W (White)




B (Black)



Frame : Die-cast aluminum (matt white/matt black)
Cone : Aluminum (mirror finish)
Weight : 0.3kg
Driver : Remote (sold separately)



600TYPE

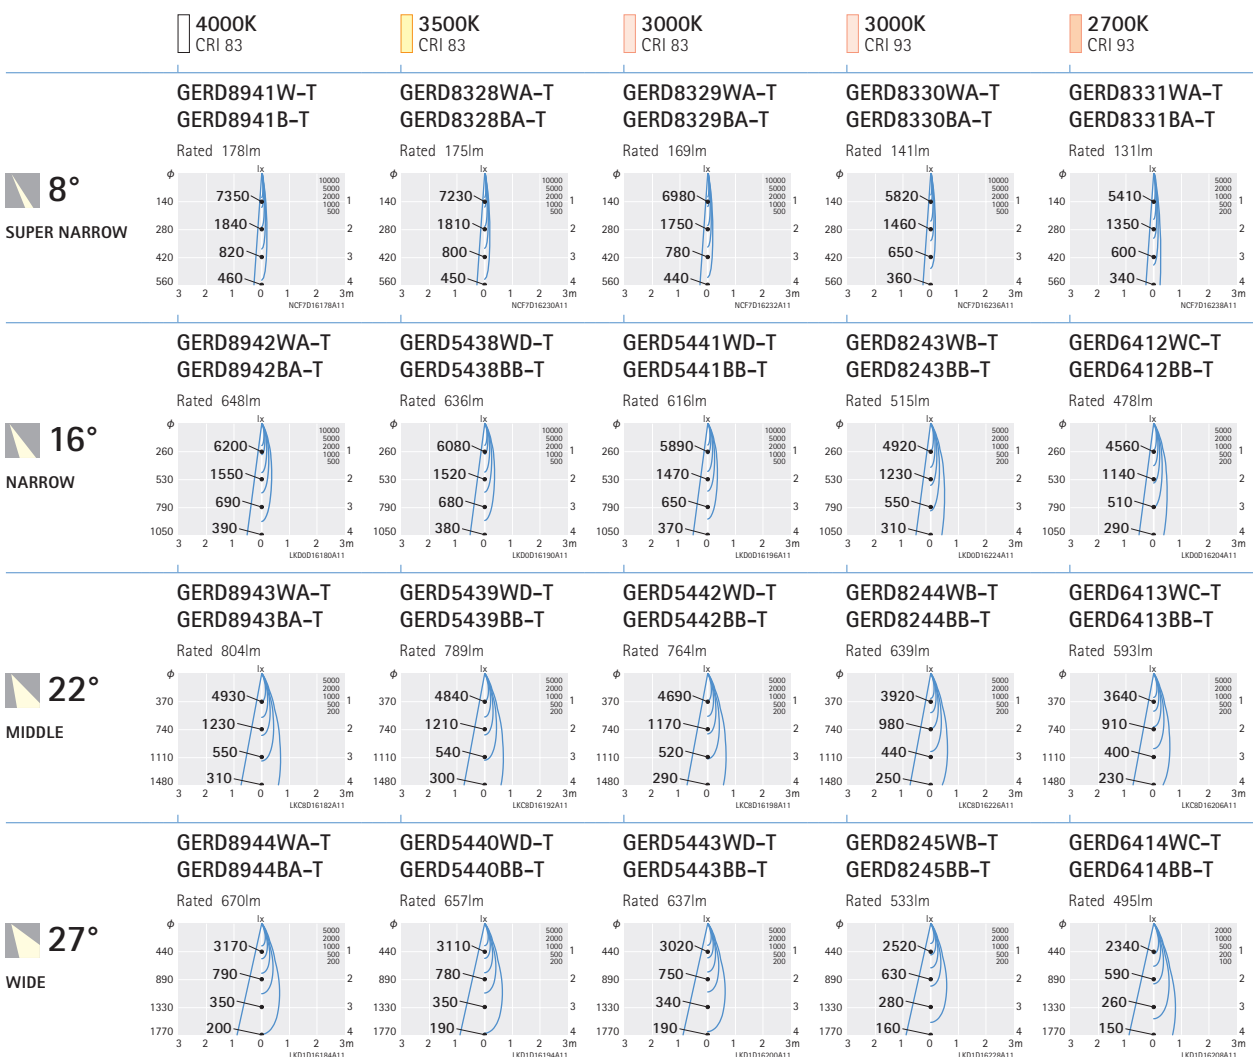

Remote Driver

GRX466N-T



220-240V
10.2W
0.1kg

GRX479N-T



220-240V
10.3W
0.2kg



Option

GRB-846W

Trimless frame



GRB-579C

Spread lens



GRB-575C

Diffusion lens



SRB-583B

Honeycomb louver



GRB-588B

Flare-cut louver




* Lenses and honeycomb louvers cannot be used together.
* Flare-cut louver can only be used with Narrow.
* All options cannot be used with Super Narrow.

75 Adjustable Black cone

Recessed Downlight Adjustable



Frame : Die-cast aluminum (matt black)
Cone : Aluminum (black)
Weight : 0.3kg
Driver : Remote (sold separately)



600TYPE



3000K
CRI 93

2700K
CRI 93

8°
SUPER NARROW

GERD8332BA-T



GERD8333BA-T



16°
NARROW

GERD8250BB-T



GERD6425BC-T



22°
MIDDLE

GERD8251BB-T



GERD6426BC-T



27°
WIDE

GERD8252BB-T

GERD6427BC-T



Remote Driver

GRX466N-T



220-240V
10.2W
0.1kg

GRX479N-T



220-240V
10.3W
0.2kg



Option

GRB-846W

Trimless frame



GRB-579C

Spread lens



GRB-575C

Diffusion lens



SRB-583B

Honeycomb louver



GRB-588B

Flare-cut louver



* Lenses and honeycomb louvers cannot be used together.
* Flare-cut louver can only be used with Narrow.
* All options cannot be used with Super Narrow.