


Date
Customer
Project
Type

Modest Recessed 74 1x IP55 LED




An easy-to-install and accessible downlight that does not settle for anything less than high quality. Modest is a classic, recessed luminaire with a surprising rainbow of diversity. Enjoy its absolute simplicity and all the new styles it will bring.




Specifications

Material		
Light Source Type	LED	
LED Type	BRIDGELUX V8G8	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K / 3000K / 3500K / 4000K / Warm Dim	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	98 99 100 100 85	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Collimator	
Measured beam angle (°)	20° / 30° / 50°	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	55	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Recessed	
Cut-out size (mm)	ø68	
Mounting depth (mm)	110.0	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	White Structure, Black Structure, Any RAL / NCS Colour, Finished in Structure, Glossy or Matt	
Gross weight (g)	190.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	13.2	13.7
Max. forward voltage (Vf)	15.0	15.4
Connected load (W)	5.0	7.2
Delivered lumens (lm)	545	739
Efficacy (lm/W)	109	103
Glare rating	13	14
Remark	This product comes in different standard and full customisations options. Click on the buttons above to discover them all or ask for a quote.	

Installation Accessories




11624030 Conbox 140x250x100x210



12292630 Gypsum fibreboard 150x150

Choose a required accessory

STANDARD OPTIONS

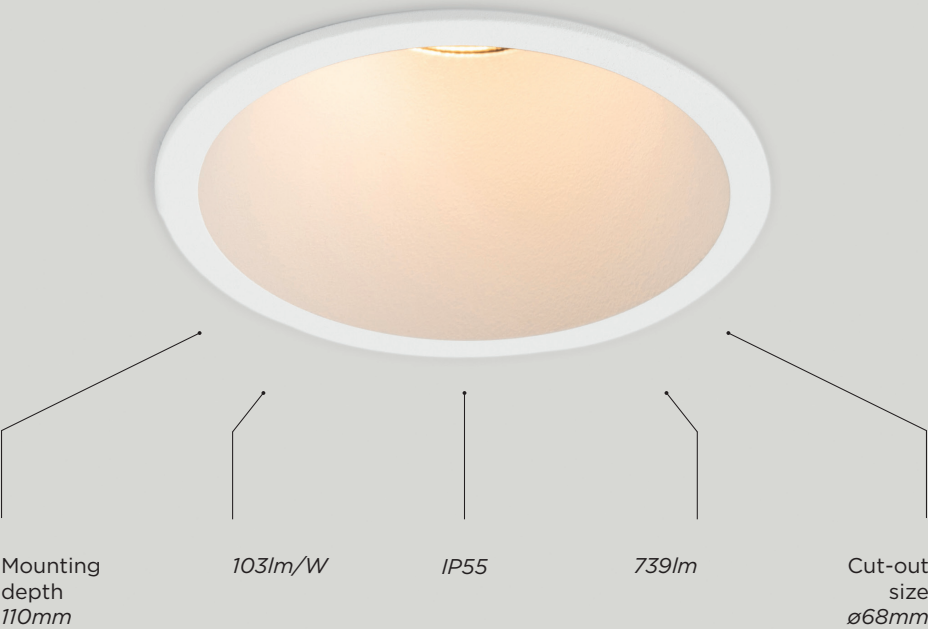

Output for White Structure, 2700K, Medium (20° - 30°)

	2700K	3000K	
	MEDIUM (20° - 30°)	MEDIUM (20° - 30°)	
BLACK STRUCTURE	13780032	13780132	
WHITE STRUCTURE	13780009	13780109	

STANDARD OPTION CUSTOMISATION

Step 1 - Standard Options



BLACK
STRUCTURE



WHITE
STRUCTURE

Step 2 - Colour Temperature



2700K



3000K



3500K



4000K



WARM DIM

Step 3 - Beam Angles



SPOT
10° - 20°



MEDIUM
20° - 30°



FLOOD
30° - 50°

COLOUR TEMPERATURE	2700K	3000K	3500K	4000K	WARM DIM	
BEAM ANGLES	SPOT	MEDIUM	FLOOD		MEDIUM	FLOOD

FULL CUSTOMISATION

Step 1 - Colour



ANY RAL / NCS
COLOUR

Step 2 - Finishing



STRUCTURE



GLOSSY



MATT

Step 3 - Colour Temperature



2700K



3000K



3500K



4000K



WARM DIM

Step 4 - Beam Angles



SPOT
10° - 20°



MEDIUM
20° - 30°



FLOOD
30° - 50°

COLOUR	ANY RAL/NCS COLOUR				ANY RAL/NCS COLOUR	
FINISHING	STRUCTURE	GLOSSY	MATT		STRUCTURE	GLOSSY MATT
COLOUR TEMPERATURE	2700K	3000K	3500K	4000K	WARM DIM	
BEAM ANGLES	SPOT	MEDIUM	FLOOD		MEDIUM	FLOOD
MIN. QTY	20				20	

COLOUR PALETTE INSPIRATION

Botanic



CHALK GREEN
120 85 05



GINKO GREEN
140 70 05



RICH OLIVE
160 30 05





Beach



CHALK BEIGE
075 80 10



TEAKWOOD BROWN
050 50 10



GRANITE BROWN
050 20 10





Cosmic




SIENNA OCHRE
050 70 30



FOXFLOWER
VIOLA
280 70 15



POMPEII BLUE
250 30 30



Azure



HALITE BLUE
260 20 20

NORDLAND
LIGHT BLUE
260 70 15

ALPINE BERRY
YELLOW
085 90 20

