

REBA 50 bOPTICS Line



Product characteristics

Body

Extruded aluminium profile

Finish

Powder coated

Optical system

bFLEX - Opal diffuser

bOPTICS - Symmetric reflector

PB - Shiny reflector

Light source

Inner profile: LED, RG1, CRI>80,

MacAdam Step ≤3

Spot: LED, RG1, CRI>90, MacAdam Step ≤3

LED lifetime

Inner profile: 80.000 @ L90, B10, Ta 25°C

Spot: 86.000h @ L80, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included

		
230V/50Hz		IP 20
bOPTICS 650°C	PB 850°C	bFLEX 960°C

02. Select interior

SPOT - Projector

Spot 1




Spot 2



Spot 3




PB - Shiny reflector 20°



SPOT	W	lm output	lm/W	Lmm	CODE*
1	11	1168	106	319	90749L001E♠♠♠2
1	11	1168	106	638	90749L002♥♠♠♠2
2	21	2336	111	319	90750L001E♠♠♠2
2	21	2336	111	638	90750L002♥♠♠♠2
3	30	3504	117	638	90751L002♥♠♠♠2

PB - Shiny reflector 50°



SPOT	W	lm output	lm/W	Lmm	CODE*
1	11	1144	104	319	90749L001E♠♠♠5
1	11	1144	104	638	90749L002♥♠♠♠5
2	21	2288	109	319	90750L001E♠♠♠5
2	21	2288	109	638	90750L002♥♠♠♠5
3	30	3431	114	638	90751L002♥♠♠♠5

SPOT - Projector


• The SPOT L319 mm version can only be applied at the end of the line (END).



*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H

Colour	
□ White	W/W
■ Black	B/B
■ Grey	G/G
□ White/Black	W/B
■ Black/White	B/W
■ Black/Golden eye	B/D



Subtitle:
1. Body
2. Spot

Colour temp.	
3000K	B
4000K	A



*Replace the symbols to complete the code

Colour	
□ White	W
■ Grey	G
■ Black	B

BLANK PART



Lmm	CODE*
319	90744L0010♠0000
638	90744L0020♠0000
957	90744L0030♠0000
1276	90744L0040♠0000
1595	90744L0050♠0000
1914	90744L0060♠0000
2233	90744L0070♠0000
2552	90744L0080♠0000
2871	90744L0090♠0000

03. Select options

OPTIONS		Code*
Start kit - end cap start/end	72  3	923110▲
• 2 end caps included.		
Through-wiring		
• Standard		
3 x 1,5 mm ²		945650
5 x 1,5 mm ²		945750
• 2 x 1,5 mm²		
HF+K3 (x1) - L639 - L1915 mm		948000
HF+K3 (x2) - L2234 - L2804 mm		948001
• 2 x 1,5 mm² + 5P terminal block		
DALI+K3 (x1) - L639 - L1915 mm		948200
DALI+K3 (x2) - L2234 - L2872 mm		948201
• 2 x 1,5 mm² + 2 x 0,75 mm² + 5P terminal block		
K3+TEL (x1) - L639 - L1915 mm		948100
K3+TEL (x2) - L2234 - L2872 mm		948101
Body connector kit		932100
• Steel body connector, screws included.		
Suspension		
S5 L1500 mm (x1)		910408
S5 L1500 mm (x2)		910409
S5 L3000 mm (x1)		910419
S5 L3000 mm (x2)		910412
S5 L6000 mm (x1)		910420
S5 L6000 mm (x2)		910421
Transparent current supply cable		
3 x 1,5 mm ²		94030▲
5 x 1,5 mm ²		94000▲
7 x 1,5 mm ²		94010▲
• For the option DALI with emergency unit and remote control, it is necessary to order 2 current supply cables of 5 x 1,5 mm ² .		
Square ceiling rose ³		
Surface mounted T25	45  100	978610▲
Surface mounted T29 (DALI+K3)		978611▲
Recessed T7	 Ø70 35  90	971400▲
Recessed T59 (DALI+K3)		971410▲
Round ceiling rose ³		
Surface mounted T24	45  Ø95	978600▲
Surface mounted T26 (DALI+K3)		978601▲
Recessed T5	 Ø70 33  Ø90	971300▲
Recessed T27 (DALI+K3)		978700▲
Low Output version		
• Under request.		
Bespoke projects		
• Under request.		




*Replace the symbols to complete the code

Length	▲
L1500 mm	0
L3000 mm	1
L6000 mm	2

Colour ³	▲
☐ White	W
☐ Grey	G
☐ Black	B



Product details

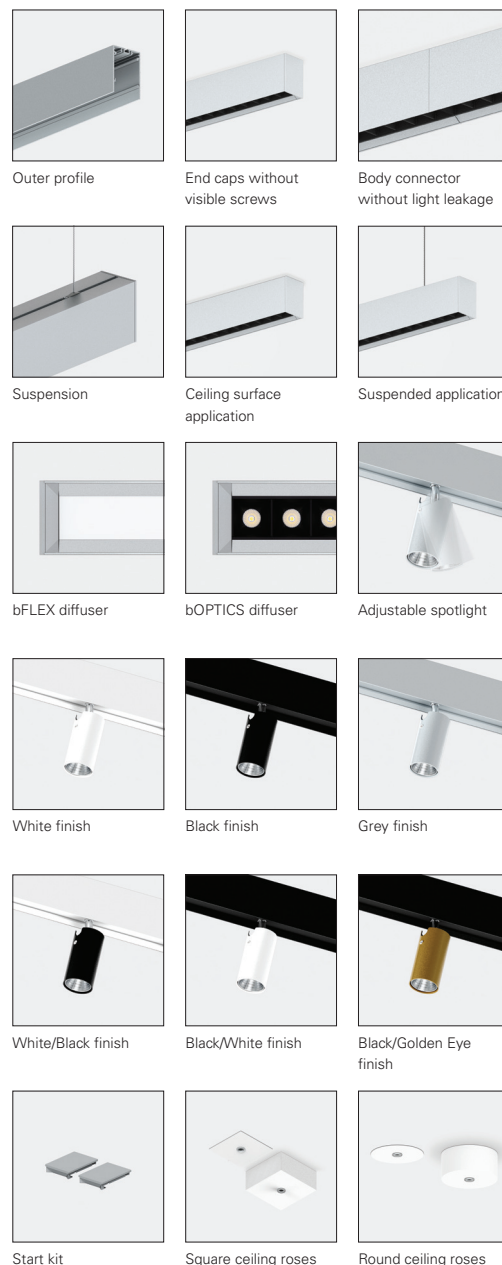

³The ceiling roses are available only in White or Black colour.