

REBA 65




Product characteristics

- Body**
Extruded aluminium profile
- Finish**
Powder coated
- Optical system**
bGLARE - Microprismatic diffuser
bLINE - Opal diffuser
ASYM - Asymmetric diffuser
- Light source**
LED, RG1, CRI>80, MacAdam Step ≤3
- LED lifetime**
80.000h @ L90, B10, Ta 25°C
- Control gear**
LED driver 220-240V-50/60Hz included

230V/50Hz	IP 40	ASYM 850°C	
bGLARE 850°C	bLINE 960°C		

01. Select Outer Profile

OUTER PROFILE



Lmm	CODE*
578	90522L0020▲0000
858	90522L0030▲0000
1138	90522L0040▲0000
1418	90522L0050▲0000
1698	90522L0060▲0000
1980	90522L0070▲0000
2260	90522L0080▲0000
2540	90522L0090▲0000
2820	90522L0100▲0000

*Replace the symbols to complete the code


Colour	▲
□ White	W
■ Grey	G
■ Black	B

OUTER PROFILE


- To complete the product add the inner profile. Please order separately.
- For suspended version add the suspension, current supply cable and ceiling rose. Please order separately.

02. Select Inner and Outer Profile

INNER PROFILE | SYMMETRIC



bGLARE - Micropismatic diffuser




W	lm output	lm/W	Lmm	CODE*
15	1577	105	562	90502L002▼W0◆00
22	2366	108	842	90502L003▼W0◆00
30	3155	105	1122	90502L004▼W◆◆00
35	3944	113	1402	90502L005▼W◆◆00
42	4732	113	1682	90502L006▼W◆◆00
52	5521	106	1964	90502L007▼W◆◆00
60	6310	105	2244	90502L008▼W◆◆00
65	7099	109	2524	90502L009▼W◆◆00
70	7887	113	2804	90502L010▼W◆◆00


*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ^{1 2}	3




bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
15	1681	112	562	90501L002▼W0◆00
22	2521	115	842	90501L003▼W0◆00
30	3362	112	1122	90501L004▼W◆◆00
35	4202	120	1402	90501L005▼W◆◆00
42	5043	120	1682	90501L006▼W◆◆00
52	5883	113	1964	90501L007▼W◆◆00
60	6724	112	2244	90501L008▼W◆◆00
65	7564	116	2524	90501L009▼W◆◆00
70	8405	120	2804	90501L010▼W◆◆00

Colour temp.	◆
3000K	3
4000K	0
Tunable White ³	T

INNER PROFILE | ASYMMETRIC



ASYM - Diffuser



W	lm output	lm/W	Lmm	CODE*
16	1474	92	562	90504L002▼W0◆00
23	2211	96	842	90504L003▼W0◆00
29	2948	102	1122	90504L004▼W◆◆00
36	3685	102	1402	90504L005▼W◆◆00
44	4422	101	1682	90504L006▼W◆◆00
52	5159	99	1964	90504L007▼W◆◆00
58	5896	102	2244	90504L008▼W◆◆00
65	6633	102	2524	90504L009▼W◆◆00
73	7370	101	2804	90504L010▼W◆◆00

¹ Prepared for emergency remote control.

² Versions DALI + EM 3h (K3) only available from L1402 mm.

³ Only available on dimmable DALI versions without emergency unit (No EM). Not available in L562 mm version.

03. Select options

OPTIONS	Code*
SwitchDIM Tunable White • Each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm.	926600
Suspension S5 L1500 mm (x1) S5 L1500 mm (x2) S5 L3000 mm (x1) S5 L3000 mm (x2) S5 L6000 mm (x1) S5 L6000 mm (x2)	910408 910409 910419 910412 910420 910421
Transparent current supply cable L1500 mm - 3 x 0,75 mm ² L1500 mm - 5 x 0,75 mm ² L1500 mm - 7 x 0,75 mm ² L3000 mm - 3 x 0,75 mm ² L3000 mm - 5 x 0,75 mm ² L3000 mm - 7 x 0,75 mm ² L6000 mm - 3 x 0,75 mm ² L6000 mm - 5 x 0,75 mm ² L6000 mm - 7 x 0,75 mm ² • For the option DALI with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm ² .	940400 940500 940600 940401 940501 940601 940402 940507 940602
Square ceiling rose Surface mounted T25 45 l  100 Surface mounted T29 (DALI+K3)	978610♣ 978611♣
Recessed T7  Ø70 35 l  90 Recessed T59 (DALI+K3)	971400♣ 971410♣
Round ceiling rose Surface mounted T24 45 l  Ø95 Surface mounted T26 (DALI+K3)	978600♣ 978601♣
Recessed T5  Ø70 33 l  Ø90 Recessed T27 (DALI+K3)	971300♣ 978700♣
Low Output version • Under request.	




*Replace the symbols to complete the code

Colour	♣
☐ White	W
☒ Black	B



Product details

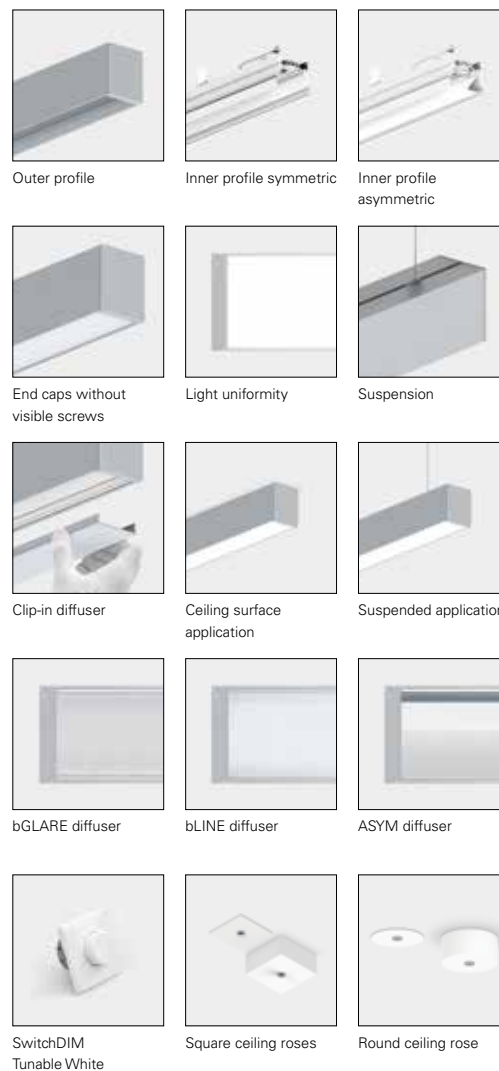



Architects: Gloone
Photo: Antonio Chaves