


REBA 50 D/I

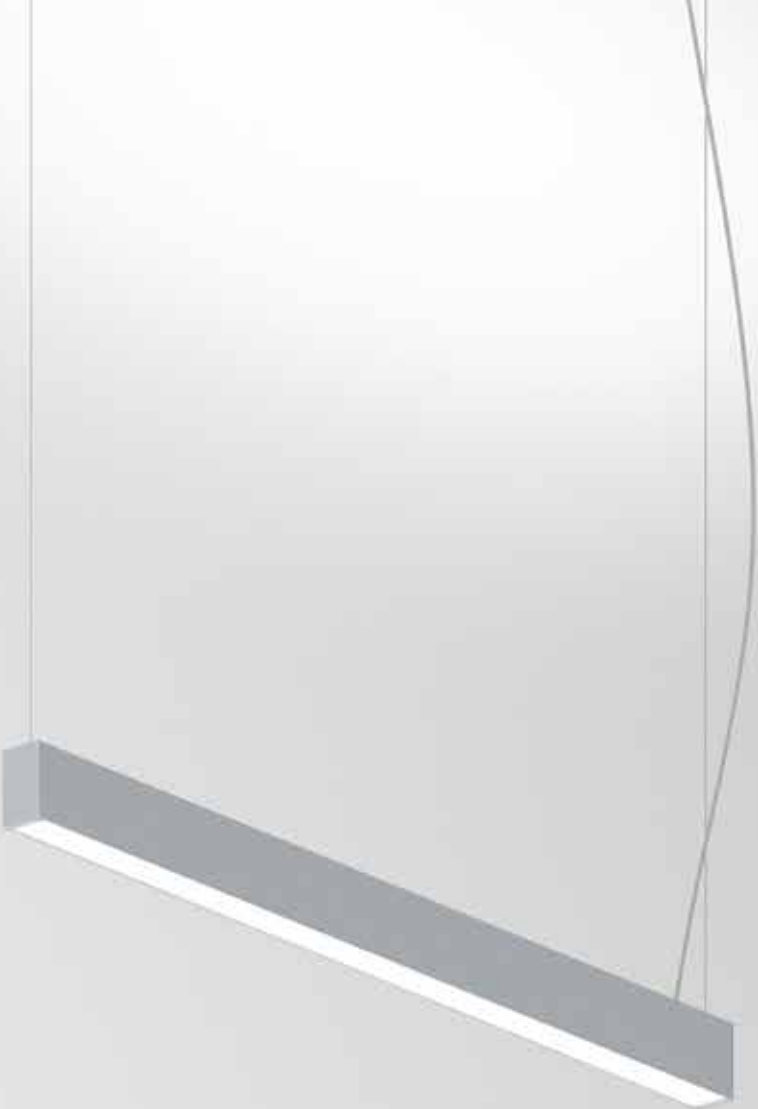


Product
characteristics

Body Extruded aluminium profile
Finish Powder coated
Optical system bGLARE - Microprismatic diffuser bLINE - Opal diffuser ASYM - Asymmetric diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included

CE	RoHS	Energy
230V/50Hz	IP 40	
ASYM 850°C	bGLARE 850°C	bLINE 960°C

01. Select Outer Profile

OUTER PROFILE



Lmm	CODE*
1138	90523L0040▲0000
1418	90523L0050▲0000
1698	90523L0060▲0000
2260	90523L0080▲0000
2540	90523L0090▲0000
2820	90523L0100▲0000



*Replace the symbols to complete the code


Colour	▲
□ White	W
■ Grey	G
■ Black	B

OUTER PROFILE


- The indirect light diffuser is included on the product.
- To complete the product add the inner profile, suspension cable and ceiling rose. Please order separately.

02. Select Inner and Outer Profile


INNER PROFILE | SYMMETRIC




bGLARE - Microprismatic diffuser (60%/40%)



W	lm output	lm/W	Lmm	CODE*
52	5159	99	1122	90528L004▼W0♦00
65	6633	102	1402	90528L005▼W0♦00
77	8107	105	1682	90528L006▼W0♦00
102	10318	101	2244	90528L008▼W0♦00
117	11792	101	2524	90528L009▼W0♦00
130	13266	102	2804	90528L010▼W0♦00



bLINE - Opal diffuser (60%/40%)



W	lm output	lm/W	Lmm	CODE*
52	5250	101	1122	90527L004▼W0♦00
65	6749	104	1402	90527L005▼W0♦00
77	8249	107	1682	90527L006▼W0♦00
102	10499	103	2244	90527L008▼W0♦00
117	11999	103	2524	90527L009▼W0♦00
130	13499	104	2804	90527L010▼W0♦00


*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y


Emergency	●
No EM	0
EM 3h (K3) ³	3

Colour temp.	♦
3000K	3
4000K	0
Tunable White ⁴	T

INNER PROFILE | ASYMMETRIC



ASYM - Diffuser (60%/40%)



W	lm output	lm/W	Lmm	CODE*
51	4707	92	1122	90530L004▼W0♦00
66	6051	92	1402	90530L005▼W0♦00
79	7396	94	1682	90530L006▼W0♦00
100	9413	94	2244	90530L008▼W0♦00
117	10758	92	2524	90530L009▼W0♦00
133	12102	91	2804	90530L010▼W0♦00

¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ Prepared for emergency remote control.

⁴ Only available for the DALI and SWD+CD without emergency unit versions (No EM).

03. Select options

OPTIONS	Code*
SwitchDIM Tunable White • Each SwitchDIM Tunable White allows the control up to 10 luminaires of L ≤ 1682 mm and up to 5 luminaires of L ≥ 1964 mm.	926600
Suspension S5 L1500 mm (x1) S5 L1500 mm (x2) S5 L3000 mm (x1) S5 L3000 mm (x2) S5 L6000 mm (x1) S5 L6000 mm (x2)	910408 910409 910419 910412 910420 910421
Transparent current supply cable L1500 mm - 3 x 0,75 mm ² L1500 mm - 5 x 0,75 mm ² L1500 mm - 7 x 0,75 mm ² L3000 mm - 3 x 0,75 mm ² L3000 mm - 5 x 0,75 mm ² L3000 mm - 7 x 0,75 mm ² L6000 mm - 3 x 0,75 mm ² L6000 mm - 5 x 0,75 mm ² L6000 mm - 7 x 0,75 mm ² • For the option DALI with emergency unit and remote control add 2 current supply cables of 5 x 0,75 mm ² .	940400 940500 940600 940401 940501 940601 940402 940507 940602
Square ceiling rose Surface mounted T25 45 l  100 Surface mounted T29 (DALI+K3)	978610♣ 978611♣
Recessed T7  Ø70 35 l  90 Recessed T59 (DALI+K3)	971400♣ 971410♣
Round ceiling rose Surface mounted T24 45 l  Ø95 Surface mounted T26 (DALI+K3)	978600♣ 978601♣
Recessed T5  Ø70 33 l  Ø90 Recessed T27 (DALI+K3)	971300♣ 978700♣
Low Output version • Under request.	



*Replace the symbols to complete the code

Colour	♣
☐ White	W
☒ Black	B



Product details



Outer profile



Inner profile symmetric



Inner profile asymmetric



End caps without visible screws




Light uniformity



Suspension



Clip-in diffuser



Suspended application



bGLARE diffuser




bLINE diffuser



ASYM diffuser



SwitchDIM Tunable White



Square ceiling roses



Round ceiling roses

