


REBA 50 /E Line

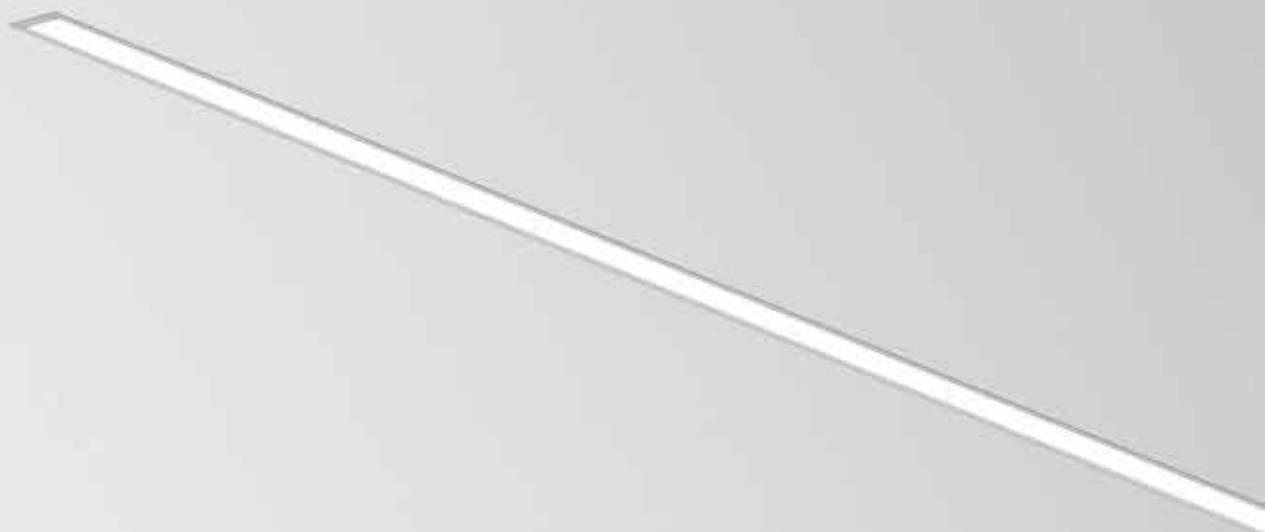

Product characteristics

Body Extruded aluminium profile
Finish Powder coated
Fixing system Brackets
Optical system bGLARE - Microprismatic diffuser bLINE - Opal diffuser ASYM - Asymmetric diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included
Ceiling thickness For ceilings between 1-25 mm

		
230V/50Hz		IP 40
ASYM 850°C	bGLARE 850°C	bLINE 960°C
		



*Replace the symbols to complete the code


Colour	
□ White	W
■ Grey	G
■ Black	B

01. Select Outer Profile


OUTER PROFILE			
Start / End (SRT/END)			
	Lmm		CODE*
	567	568	90506L0020▲0083
	847	848	90506L0030▲0083
	1127	1128	90506L0040▲0083
	1407	1408	90506L0050▲0083
	1687	1688	90506L0060▲0083
	1969	1970	90506L0070▲0083
	2249	2250	90506L0080▲0083
	2529	2530	90506L0090▲0083
	2809	2810	90506L0100▲0083
Middle (MID)			
	Lmm		CODE*
	562	562	90506L0020▲0000
	842	842	90506L0030▲0000
	1122	1122	90506L0040▲0000
	1402	1402	90506L0050▲0000
	1682	1682	90506L0060▲0000
	1964	1964	90506L0070▲0000
	2244	2244	90506L0080▲0000
	2524	2524	90506L0090▲0000
	2804	2804	90506L0100▲0000
Vertical corner (VRT)			
	Lmm		CODE*
	606	536	90506V0040▲0000
Horizontal corner (HRZ) - Horizontal edge corner (EDGE)			
	Lmm		CODE*
	607	604	90506H0040▲0000
OUTER PROFILE			
• To complete the product add the inner profile. Please order separately. • To complete the line add the start kit, through-wiring and body connector kit. Please order separately. • Dimensions do not include the start kit. Add 6 mm to the recessing length to complete the line. • The maximum line length with 1 single feeding point is 30000 mm.			

02. Select Inner and Outer Profile

INNER PROFILE | SYMMETRIC




bGLARE - Microprismatic diffuser



W	lm output	lm/W	Lmm	CODE*
15	1603	107	562	90498L002▼W0◆00
22	2405	109	842	90498L003▼W0◆00
30	3207	107	1122	90498L004▼W0◆00
35	4008	115	1402	90498L005▼W0◆00
42	4810	115	1682	90498L006▼W0◆00
52	5612	108	1964	90498L007▼W0◆00
60	6413	107	2244	90498L008▼W0◆00
65	7215	111	2524	90498L009▼W0◆00
70	8017	115	2804	90498L010▼W0◆00

VRT	30	3207	107	599	90498V004▼W0◆00
HRZ	30	3207	107	577	90498H004▼W0◆00


bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
15	1655	110	562	90497L002▼W0◆00
22	2483	113	842	90497L003▼W0◆00
30	3310	110	1122	90497L004▼W0◆00
35	4138	118	1402	90497L005▼W0◆00
42	4965	118	1682	90497L006▼W0◆00
52	5793	111	1964	90497L007▼W0◆00
60	6620	110	2244	90497L008▼W0◆00
65	7448	115	2524	90497L009▼W0◆00
70	8275	118	2804	90497L010▼W0◆00

VRT	30	3310	110	599	90497V004▼W0◆00
HRZ	30	3310	110	577	90497H004▼W0◆00

INNER PROFILE | ASYMMETRIC



ASYM - Diffuser



W	lm output	lm/W	Lmm	CODE*
16	1396	87	562	90500L002▼W0◆00
23	2095	91	842	90500L003▼W0◆00
29	2793	96	1122	90500L004▼W0◆00
36	3491	97	1402	90500L005▼W0◆00
44	4189	95	1682	90500L006▼W0◆00
52	4888	94	1964	90500L007▼W0◆00
58	5586	96	2244	90500L008▼W0◆00
65	6284	97	2524	90500L009▼W0◆00
73	6982	96	2804	90500L010▼W0◆00

EDGE	29	2793	96	599	90500E004▼W0◆00
HRZ	29	2793	96	577	90500H004▼W0◆00



*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ^{1 2}	3

Colour temp.	◆
3000K	3
4000K	0
Tunable White ³	T

¹ Prepared for emergency remote control.

² Versions DALI + EM 3h (K3) only available from L1402 mm.

³ Only available on dimmable DALI versions without emergency unit (No EM). Not available in L562 mm version.

03. Select options

OPTIONS	Code*
SwitchDIM Tunable White • Each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm.	926600
Start kit - end cap start/end • 2 end caps included.	 923200♣
Through-wiring • Standard 3 x 1,5 mm ² 5 x 1,5 mm ²	945650 945750
• 2 x 1,5 mm² HF+K3 (x1) - L562 - L1682 mm HF+K3 (x2) - L1964 - L2804 mm	948000 948001
• 2 x 1,5 mm² + 5P terminal block DALI+K3 (x1) - L562 - L1682 mm DALI+K3 (x2) - L1964 - L2804 mm	948200 948201
• 2 x 1,5 mm² + 2 x 0,75 mm² + 5P terminal block K3+TEL (x1) - L562 - L1682 mm K3+TEL (x2) - L1964 - L2804 mm	948100 948101
Body connector kit • Steel body connector, screws included.	932100
Blank part L1500 mm L3000 mm • Includes inner profile and aluminium blank cover.	992920♣ 992921♣
Steel safety cable L1500 mm	955000
Low Output version • Under request.	
Bespoke projects • Under request.	



*Replace the symbols to complete the code

Colour	♣
□ White	W
■ Grey	G
■ Black	B



Product details



Outer profile



Inner profile symmetric



Inner profile asymmetric



Light uniformity




Brackets



Clip-in diffuser



Vertical corner



Horizontal corner



Ceiling recessed application



bGLARE diffuser



bLINE diffuser



ASYM diffuser



SwitchDIM Tunable White



Start kit

