


REBA 50 /W Line

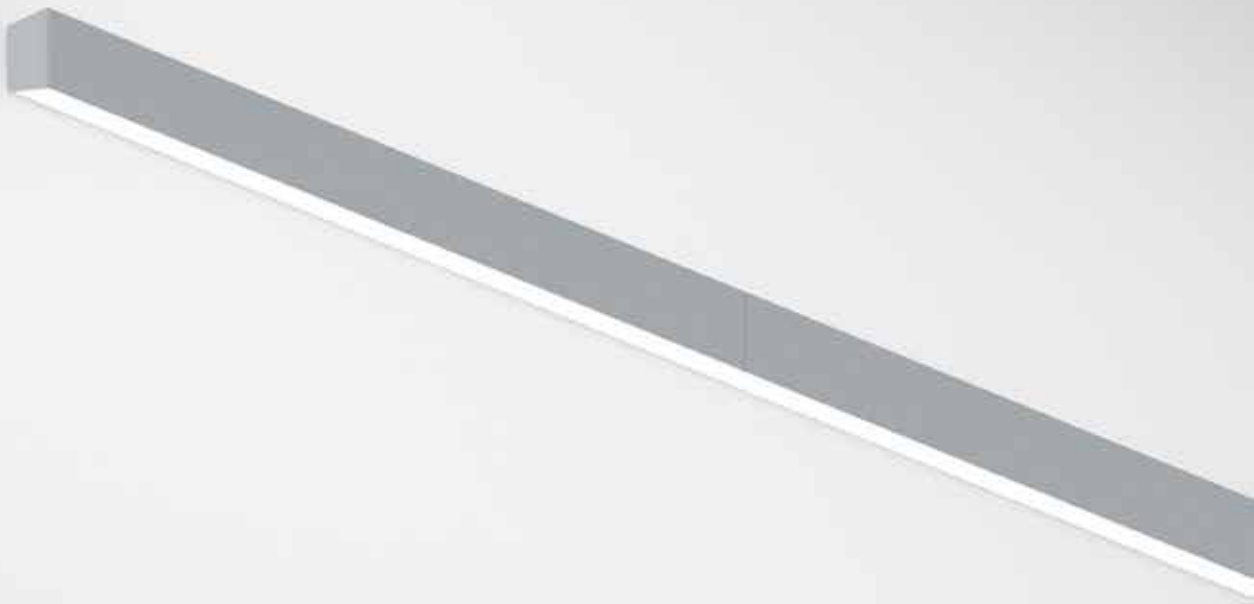

Product characteristics

Body
Extruded aluminium profile
Finish
Powder coated
Optical system
bLINE - Opal diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
80.000h @ L90, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included


	
230V/50Hz	
	IP 40
bLINE 960°C	

01. Select Outer Profile



OUTER PROFILE

Start / End (SRT/END)




Lmm	CODE*
1125	90526L0040▲0083
1405	90526L0050▲0083
1685	90526L0060▲0083
1965	90526L0070▲0083
2245	90526L0080▲0083
2525	90526L0090▲0083
2805	90526L0100▲0083

*Replace the symbols to complete the code


Colour	▲
□ White	W
■ Grey	G
■ Black	B

Middle (MID)




Lmm	CODE*
1122	90526L0040▲0000
1402	90526L0050▲0000
1682	90526L0060▲0000
1962	90526L0070▲0000
2242	90526L0080▲0000
2522	90526L0090▲0000
2802	90526L0100▲0000

Vertical corner (VRT)




Lmm	CODE*
631	90526V0040▲0000

Horizontal edge corner (EDGE)



Lmm	CODE*
601	90526E0040▲0000

Horizontal corner (HRZ)



Lmm	CODE*
602	90526H0040▲0000


OUTER PROFILE

- To complete the product add the inner profile. Please order separately.
- To complete the line add the start kit, through-wiring and body connector kit. Please order separately.
- The maximum line length with 1 single feeding point is 30000 mm.


02. Select Inner and Outer Profile



INNER PROFILE | DIRECT / INDIRECT



bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
60	6724	112	1122	90536L004▼W0♦00
70	8405	120	1402	90536L005▼W0♦00
84	10085	120	1682	90536L006▼W0♦00
104	11766	113	1962	90536L007▼W0♦00
120	13447	112	2242	90536L008▼W0♦00
130	15128	116	2522	90536L009▼W0♦00
140	16809	120	2802	90536L010▼W0♦00
VRT	60	6724	112	90536V004▼W0♦00
EDGE	60	6724	112	90536E004▼W0♦00
HRZ	60	6724	112	90536H004▼W0♦00


*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y


Emergency	
No EM	0
EM 3h (K3) ³	3

Colour temp.	
3000K	3
4000K	0
Tunable White ⁴	T

INNER PROFILE | DIRECT




bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
30	3362	112	1122	90535L004▼W0♦00
35	4202	120	1402	90535L005▼W0♦00
42	5043	120	1682	90535L006▼W0♦00
52	5883	113	1962	90535L007▼W0♦00
60	6724	112	2242	90535L008▼W0♦00
65	7564	116	2522	90535L009▼W0♦00
70	8405	120	2802	90535L010▼W0♦00
VRT	30	3362	112	90535V004▼W0♦00
EDGE	30	3362	112	90535E004▼W0♦00
HRZ	30	3362	112	90535H004▼W0♦00

INNER PROFILE | INDIRECT



bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
30	3362	112	1122	90518L004▼W0♦00
35	4202	120	1402	90518L005▼W0♦00
42	5043	120	1682	90518L006▼W0♦00
52	5883	113	1962	90518L007▼W0♦00
60	6724	112	2242	90518L008▼W0♦00
65	7564	116	2522	90518L009▼W0♦00
70	8405	120	2802	90518L010▼W0♦00
VRT	30	3362	112	90518V004▼W0♦00
EDGE	30	3362	112	90518E004▼W0♦00
HRZ	30	3362	112	90518H004▼W0♦00

¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ Prepared for emergency remote control.

⁴ Only available for the DALI and SWD+CD without emergency unit versions (No EM).

03. Select options

Options	Code*
SwitchDIM Tunable White • In the Direct version and in the Indirect version each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm. • In the Direct/Indirect version each SwitchDIM Tunable White allows the control up to 10 luminaires of L ≤ 1682 mm and up to 5 luminaires of L ≥ 1964 mm.	926600
Start kit - end cap start/end • 2 end caps included.	 923400♣
Through-wiring • Standard 3 x 1,5 mm ² 5 x 1,5 mm ²	945650 945750
• 2 x 1,5 mm² HF+K3 (x1) - L562 - L1682 mm HF+K3 (x2) - L1964 - L2804 mm	948000 948001
• 2 x 1,5 mm² + 5P terminal block DALI+K3 (x1) - L562 - L1682 mm DALI+K3 (x2) - L1964 - L2804 mm	948200 948201
• 2 x 1,5 mm² + 2 x 0,75 mm² + 5P terminal block K3+TEL (x1) - L562 - L1682 mm K3+TEL (x2) - L1964 - L2804 mm	948100 948101
Body connector kit • Steel body connector, screws included.	932120
Blank part L1500 mm L3000 mm • Includes inner profile and aluminium blank cover.	992960♣ 992961♣
Signage • Allows signs or text engraving on the outer profile.	
Low Output version • Under request.	
Bespoke projects • Under request.	



*Replace the symbols to complete the code

Colour	♣
□ White	W
■ Grey	G
■ Black	B



Product details

