


REBA 50 /W

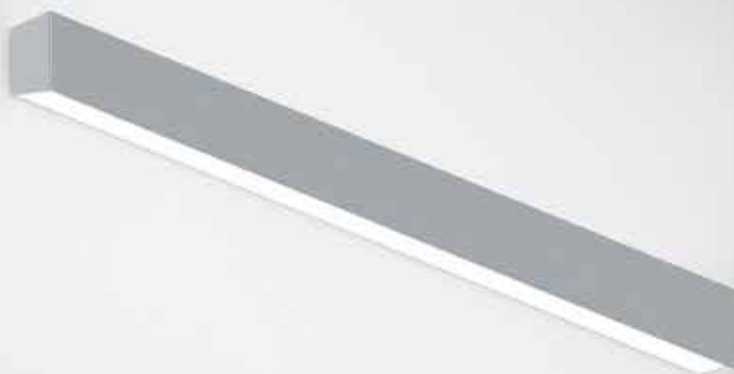


Product
characteristics

Body
Extruded aluminium profile
Finish
Powder coated
Optical system
bLINE - Opal diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
80.000h @ L90, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included

	
230V/50Hz	
	IP 40
bLINE 960°C	

01. Select Outer Profile

OUTER PROFILE



Lmm	CODE*
1128	90521L0040▲0000
1408	90521L0050▲0000
1688	90521L0060▲0000
1968	90521L0070▲0000
2248	90521L0080▲0000
2528	90521L0090▲0000
2808	90521L0100▲0000



*Replace the symbols to complete the code


Colour	▲
□ White	W
■ Grey	G
■ Black	B

OUTER PROFILE


- To complete the product add the inner profile. Please order separately.

02. Select Inner and Outer Profile

INNER PROFILE | DIRECT / INDIRECT



bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
60	6724	112	1122	90536L004▼W0◆00
70	8405	120	1402	90536L005▼W0◆00
84	10085	120	1682	90536L006▼W0◆00
104	11766	113	1962	90536L007▼W0◆00
120	13447	112	2242	90536L008▼W0◆00
130	15128	116	2522	90536L009▼W0◆00
140	16809	120	2802	90536L010▼W0◆00

*Replace the symbols to complete the code


Control	▼
gear	
HF	E
DALI	H
HF+CD ¹	Q
SWD+CD ²	Y

Emergency	●
No EM	0
EM 3h (K3) ³	3

INNER PROFILE | DIRECT




bLINE - Opal diffuser




W	lm output	lm/W	Lmm	CODE*
30	3362	112	1122	90535L004▼W0◆00
35	4202	120	1402	90535L005▼W0◆00
42	5043	120	1682	90535L006▼W0◆00
52	5883	113	1962	90535L007▼W0◆00
60	6724	112	2242	90535L008▼W0◆00
65	7564	116	2522	90535L009▼W0◆00
70	8405	120	2802	90535L010▼W0◆00

Colour temp.	◆
3000K	3
4000K	0
Tunable White ⁴	T

INNER PROFILE | INDIRECT



bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
30	3362	112	1122	90518L004▼W0◆00
35	4202	120	1402	90518L005▼W0◆00
42	5043	120	1682	90518L006▼W0◆00
52	5883	113	1962	90518L007▼W0◆00
60	6724	112	2242	90518L008▼W0◆00
65	7564	116	2522	90518L009▼W0◆00
70	8405	120	2802	90518L010▼W0◆00

¹ HF + Double circuit.

² SwitchDIM + Double circuit.

³ Prepared for emergency remote control.

⁴ Only available for the DALI and SWD+CD without emergency unit versions (No EM).

03. Select
options

OPTIONS	Code
SwitchDIM Tunable White • In the Direct version and in the Indirect version each SwitchDIM Tunable White allows the control up to 20 luminaires of $L \leq 1682$ mm and up to 10 luminaires of $L \geq 1964$ mm. • In the Direct/Indirect version each SwitchDIM Tunable White allows the control up to 10 luminaires of $L \leq 1682$ mm and up to 5 luminaires of $L \geq 1964$ mm.	926600
Signage • Allows signs or text engraving on the outer profile.	
Low Output version • Under request.	




Product
details




Outer profile



Inner profile



End caps without
visible screws



Light uniformity




Clip-in diffuser



Wall application with
direct/indirect light



Wall application with
direct light



Wall application with
indirect light



bLINE diffuser



SwitchDIM
Tunable White



Bespoke signage
under request

