


REBA 65 /E Line

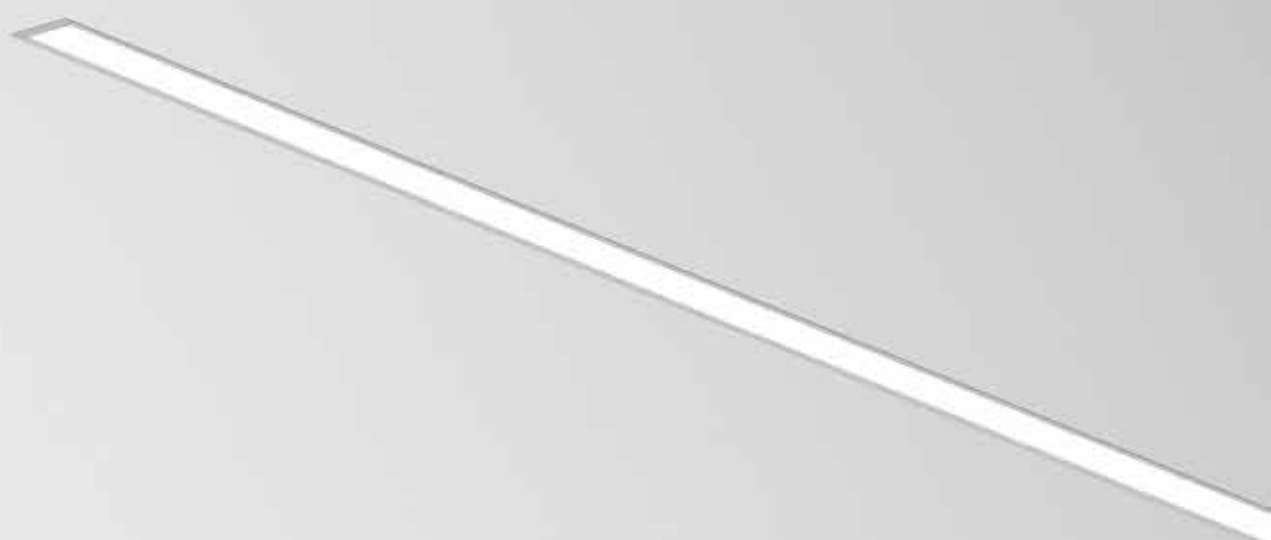

Product characteristics

Body Extruded aluminium profile
Finish Powder coated
Fixing system Brackets
Optical system bGLARE - Microprismatic diffuser bLINE - Opal diffuser ASYM - Asymmetric diffuser
Light source LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime 80.000h @ L90, B10, Ta 25°C
Control gear LED driver 220-240V-50/60Hz included
Ceiling thickness For ceilings between 1-25 mm


230V/50Hz		IP 40
ASYM 850°C	bGLARE 850°C	bLINE 960°C

01. Select Outer Profile



OUTER PROFILE

Start / End (SRT/END)




Lmm		CODE*
567	568	90510L0020▲0083
847	848	90510L0030▲0083
1127	1128	90510L0040▲0083
1407	1408	90510L0050▲0083
1687	1688	90510L0060▲0083
1969	1970	90510L0070▲0083
2249	2250	90510L0080▲0083
2529	2530	90510L0090▲0083
2809	2810	90510L0100▲0083

*Replace the symbols to complete the code


Colour	
☐ White	W
☐ Grey	G
☐ Black	B

Middle (MID)




Lmm		CODE*
562	562	90510L0020▲0000
842	842	90510L0030▲0000
1122	1122	90510L0040▲0000
1402	1402	90510L0050▲0000
1682	1682	90510L0060▲0000
1964	1964	90510L0070▲0000
2244	2244	90510L0080▲0000
2524	2524	90510L0090▲0000
2804	2804	90510L0100▲0000

Vertical corner (VRT)



Lmm		CODE*
606	526	90510V0040▲0000

Horizontal corner (HRZ) - Horizontal edge corner (EDGE)




Lmm		CODE*
614	611	90510H0040▲0000

OUTER PROFILE


- To complete the product add the inner profile. Please order separately.
- To complete the line add the start kit, through-wiring and body connector kit. Please order separately.
- Dimensions do not include the start kit. Add 6 mm to the recessing length to complete the line.
- The maximum line length with 1 single feeding point is 30000 mm.

02. Select Inner and Outer Profile

INNER PROFILE | SYMMETRIC




bGLARE - Microprismatic diffuser



W	Im output	Im/W	Lmm	CODE*
15	1577	105	562	90502L002▼W0◆00
22	2366	108	842	90502L003▼W0◆00
30	3155	105	1122	90502L004▼W◆◆00
35	3944	113	1402	90502L005▼W◆◆00
42	4732	113	1682	90502L006▼W◆◆00
52	5521	106	1964	90502L007▼W◆◆00
60	6310	105	2244	90502L008▼W◆◆00
65	7099	109	2524	90502L009▼W◆◆00
70	7887	113	2804	90502L010▼W◆◆00

VRT	30	3155	105	606	90502V004▼W0◆00
HRZ	30	3155	105	608	90502H004▼W0◆00


bLINE - Opal diffuser




W	Im output	Im/W	Lmm	CODE*
15	1681	112	562	90501L002▼W0◆00
22	2521	115	842	90501L003▼W0◆00
30	3362	112	1122	90501L004▼W◆◆00
35	4202	120	1402	90501L005▼W◆◆00
42	5043	120	1682	90501L006▼W◆◆00
52	5883	113	1964	90501L007▼W◆◆00
60	6724	112	2244	90501L008▼W◆◆00
65	7564	116	2524	90501L009▼W◆◆00
70	8405	120	2804	90501L010▼W◆◆00

VRT	30	3362	112	606	90501V004▼W0◆00
HRZ	30	3362	112	608	90501H004▼W0◆00

INNER PROFILE | ASYMMETRIC



ASYM - Diffuser



W	Im output	Im/W	Lmm	CODE*
16	1474	92	562	90504L002▼W0◆00
23	2211	96	842	90504L003▼W0◆00
29	2948	102	1122	90504L004▼W◆◆00
36	3685	102	1402	90504L005▼W◆◆00
44	4422	101	1682	90504L006▼W◆◆00
52	5159	99	1964	90504L007▼W◆◆00
58	5896	102	2244	90504L008▼W◆◆00
65	6633	102	2524	90504L009▼W◆◆00
73	7370	101	2804	90504L010▼W◆◆00

EDGE	29	2948	102	606	90504E004▼W0◆00
HRZ	29	2948	102	608	90504H004▼W0◆00



*Replace the symbols to complete the code

Control gear

HF E

DALI H

Emergency

No EM 0

EM 3h (K3) ^{1 2} 3

Colour temp.

3000K 3

4000K 0

Tunable White ³ T

¹ Prepared for emergency remote control.

² Versions DALI + EM 3h (K3) only available from L1402 mm.

³ Only available on dimmable DALI versions without emergency unit (No EM). Not available in L562 mm version.

03. Select options

OPTIONS	Code*
SwitchDIM Tunable White • Each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm.	926600
Start kit - end cap start/end • 2 end caps included.	82 77 9 923600♣
Through-wiring • Standard 3 x 1,5 mm ² 5 x 1,5 mm ²	945650 945750
• 2 x 1,5 mm² HF+K3 (x1) - L562 - L1682 mm HF+K3 (x2) - L1964 - L2804 mm	948000 948001
• 2 x 1,5 mm² + 5P terminal block DALI+K3 (x1) - L562 - L1682 mm DALI+K3 (x2) - L1964 - L2804 mm	948200 948201
• 2 x 1,5 mm² + 2 x 0,75 mm² + 5P terminal block K3+TEL (x1) - L562 - L1682 mm K3+TEL (x2) - L1964 - L2804 mm	948100 948101
Body connector kit • Steel body connector, screws included.	932200
Blank part L1500 mm L3000 mm • Includes inner profile and aluminium blank cover.	993020♣ 993021♣
Steel safety cable L1500 mm	955000
Low Output version • Under request.	
Bespoke projects • Under request.	



*Replace the symbols to complete the code

Colour	♣
□ White	W
■ Grey	G
■ Black	B



Product details



Outer profile



Inner profile symmetric



Inner profile asymmetric



Light uniformity




Brackets



Clip-in diffuser



Vertical corner



Horizontal corner



Ceiling recessed application



bGLARE diffuser



bLINE diffuser



ASYM diffuser



SwitchDIM Tunable White



Start kit

