



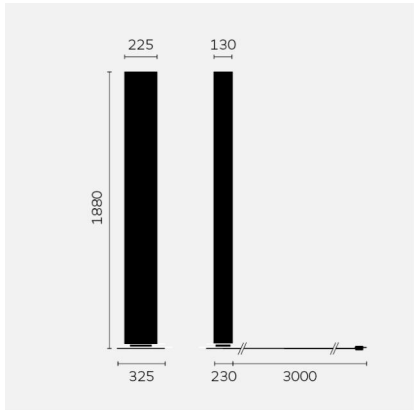


Type	TWI10-14-8027-DD
Order No	TWI10-14-8027-DD
Lamp type/assembly	Standing luminaire
Version	LED
Colour	Black (painted)
Colour temperature	2700 K
Colour rendering index	CRI80+
Operation	Dimmable on Site
Lamp shade	Acrylic glass, prismatic
Base	Stainless steel
Power cable	Black, 3 x 0.75 mm² , L 4000 mm
Mains plug	without
Light distribution	Direct (2834 lm) / indirect (3193 lm)
Total luminous flux of luminaire	6027 lm
Power consumption	64 W
Luminaire efficacy	94 lm/W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	2 (1980 x 420 x 360 + 1930 x 340 x 270 mm)
Weight	23.0 kg
Guarantee	36 months

DESIGN **PLUS**

Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com




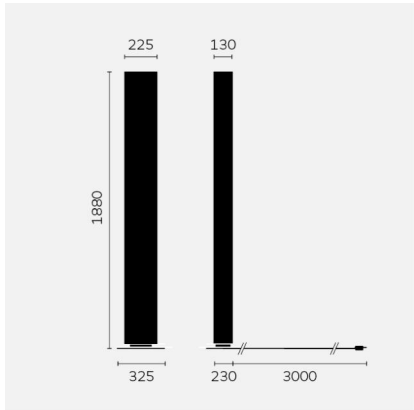


Type	TWI10-11-8027-DD
Order No	TWI10-11-8027-DD
Lamp type/assembly	Standing luminaire
Version	LED
Colour	Stainless steel (brushed)
Colour temperature	2700 K
Colour rendering index	CRI80+
Operation	Dimmable on Site
Lamp shade	Acrylic glass, prismatic
Base	Stainless steel
Power cable	Black, 3 x 0.75 mm² , L 4000 mm
Mains plug	without
Light distribution	Direct (2834 lm) / indirect (3193 lm)
Total luminous flux of luminaire	6027 lm
Power consumption	64 W
Luminaire efficacy	94 lm/W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	2 (1980 x 420 x 360 + 1930 x 340 x 270 mm)
Weight	23.0 kg
Guarantee	36 months

Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

DESIGN **PLUS**



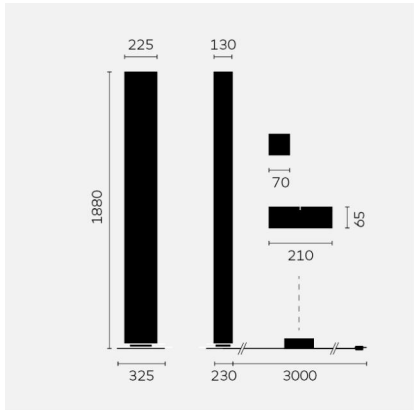

Type	TWI12-16-DTW
Order No	TWI12-16-DTW
Lamp type/assembly	Standing luminaire
Version	LED
Colour	Black (painted)
Colour temperature	3000 - 1800K
Colour rendering index	CRI80+
Operation	Dim to Warm, cable integrated
Lamp shade	Acrylic glass, prismatic
Base	Stainless steel
Power cable	Black, 3 x 0.75 mm² , L 4000 mm
Mains plug	UK BS 1363 (Typ G)
Light distribution	Direct / indirect
Total luminous flux of luminaire	4720 lm
Power consumption	64 W
Luminaire efficacy	74 lm/W
Mains voltage	220-240V / 50Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	2 (1980 x 420 x 360 + 1930 x 340 x 270 mm)
Weight	23.0 kg
Guarantee	36 months

Belux AG
Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

DESIGN **PLUS**

