

erluna

**infinity midi
adjustable
origin natural**

circular product





IP65
IP54



UK
CA

infinity midi adjustable

origin natural

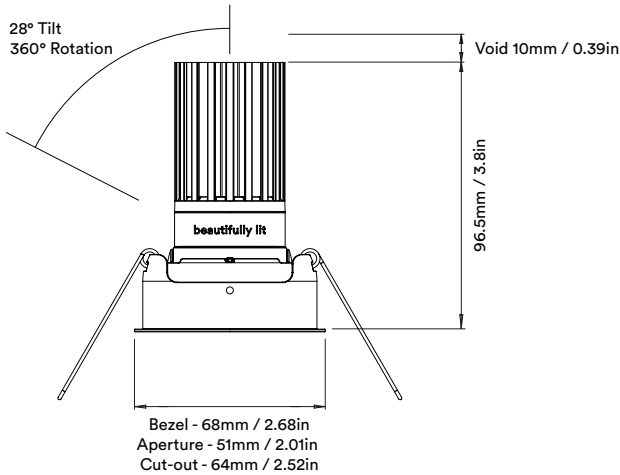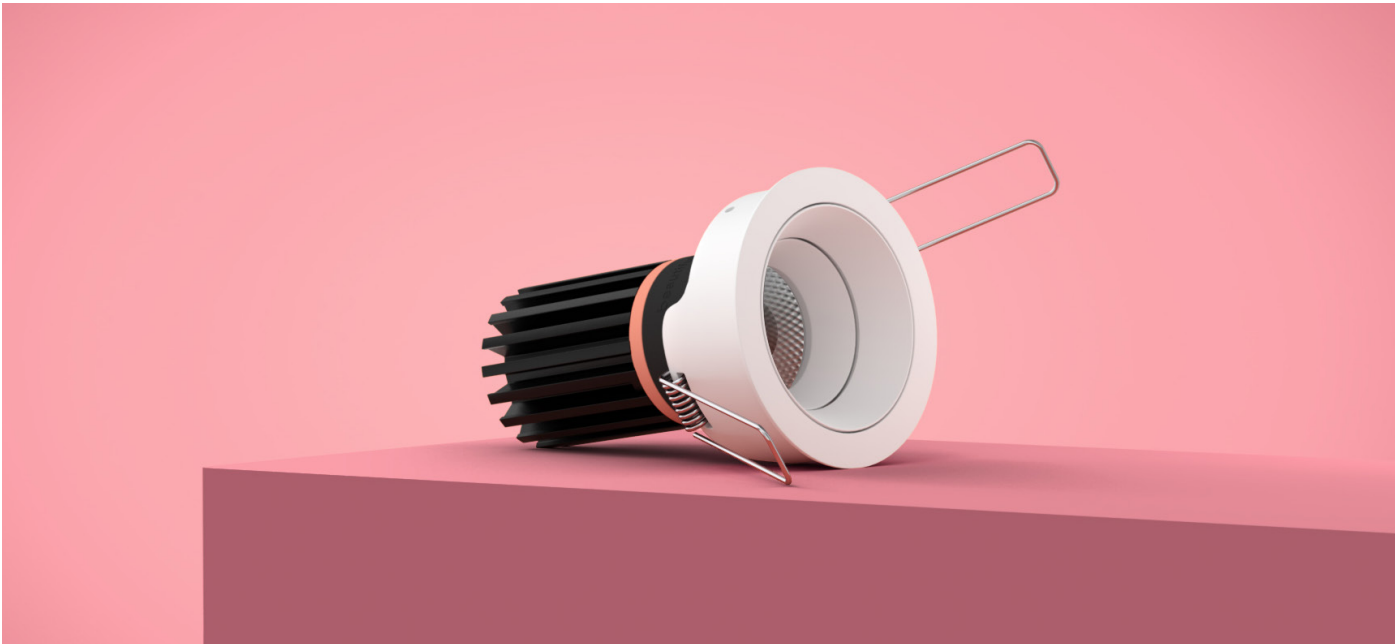

infinity midi adjustable

origin natural

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3



The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



circular product

orluna



infinity midi adjustable
origin natural

circular product

		2700K				
		SOFT				
LIGHT VALUES		Spot	Narrow	Medium	Wide	Flood
	Beam Width FWHM	12°	18°	24°	37°	45°
	Source Lumens	858	858	858	858	858
	Engine Lumens	332	637	671	678	679
	Luminaire Lumens	305	564	621	636	633
	Source Lm/CW *1	89	89	89	89	89
	Luminaire Lm/CW *2	31	58	64	66	65
	Luminiare Cd	3885	4169	3322	1655	1154
POWER	Voltage	34.6V				
	Drive Current	250mA				
	Circuit Power (typ)	9.7W				

*1 Part L1 (Residential) *2 Part L2 (Commercial)

		3000K				
		SOFT				
		Spot	Narrow	Medium	Wide	Flood
LIGHT VALUES	Beam Width FWHM	12°	18°	24°	37°	45°
	Source Lumens	915	915	915	915	915
	Engine Lumens	354	728	766	774	775
	Luminaire Lumens	325	602	662	678	675
	Source Lm/CW *1	94	94	94	94	94
	Luminaire Lm/CW *2	34	62	68	70	70
	Luminiare Cd	4145	4448	3544	1766	1231
POWER	Voltage	34.6V				
	Drive Current	250mA				
	Circuit Power (typ)	9.7W				

*1 Part L1 (Residential) *2 Part L2 (Commercial)

DRIVER	Binning SDCM (Hot)	2					
	CRI (typ)(R9)	98 (99)					
	TM30 Rf Rg	Rf 97.7 Rg 100.4					
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)					
	Protocols	Mains Dim / DALI / 0-10V / Non-dim					
DRIVER	Dim to Dark	0.1% Lux					
	Distance from LED	20m / 65' (series wiring)					
	Emergency	Emergency packs available					

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
NL	INFD	27	M	M	W	WB	54 H
		27 / 2700K 30 / 3000K 40 / 4000K*	M / Mains Dim D / DALI O / 0-10v N / Non Dim X / No Driver	S / Spot N / Narrow M / Medium W / Wide F / Flood	W / White 9010 D / White RAL 9003 C / Other RAL G / Polished Brass K / Brushed Chrome L / Polished Chrome Z / Other Metallic V / Dark Bronze T / Medium Bronze R / Light Bronze Y / Burnished Brass AW / Anodised White 9016 AB / Anodised Black AV / Anodised Bronze AP / Anodised Burnished	WB / White RAL 9010 DB / White RAL 9003 CB / Other RAL GB / Polished Brass KB / Brushed Chrome LB / Polished Chrome ZB / Other Metallic VB / Dark Bronze TB / Medium Bronze RB / Light Bronze YB / Burnished Brass AWB / Anodised White 9016 ABB / Anodised Black AVB / Anodised Bronze APB / Anodised Burnished	54 / IP54 65 / IP65 H / Honeycomb Louvre K / Click Connector Z / LSZH Cable E / Emergency F / 60 min Fire Rated
		*NOTE: increase 3000k by 7%					