

belux



kido

belux



reddot winner 2022  
lighting design

kido

# Art Director Kristof Pycke and engineer Bruno Aeberli

With the new belux kido family, belux has reached a new milestone in its product range of high-quality office and object lighting. The Swiss luminaire manufacturer turned to Kristof Pycke, the Belgian Art Director of kreon, for the design of the new luminaire family. Working closely with engineer Bruno Aeberli from belux and experts for office lighting, he was responsible for the design process and managed to make a statement with the timelessly elegant lines of belux kido. The belux kido family reflects the typical stylistic idiom of the belux office range.

belux



4


kido

5

# belux

Available as standing light, pendant light and desk-mounted luminaire, belux kido is the functional and aesthetic answer to every requirement of modern office concepts, and gives architects and interior designers a maximum of flexibility in their designs.

## STANDING LIGHTS

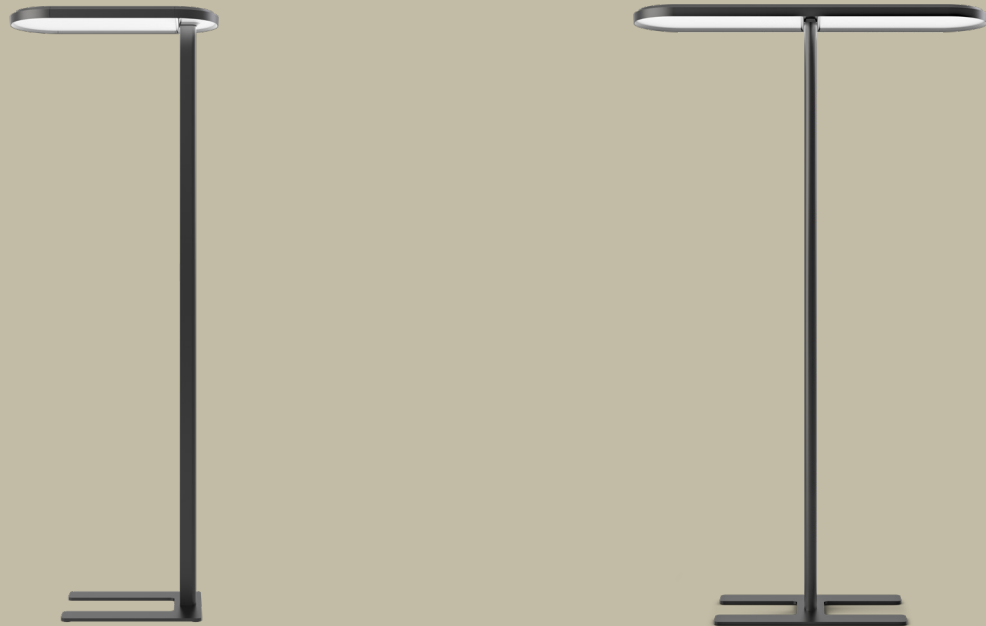

# kido

## PENDANT LIGHTS



## DESK-MOUNTED LUMINAIRES



belux

kido



belux

kido

ASYMMETRIC

SYMMETRIC





single

double



20% direct, 80% indirect

20% direct, 80% indirect

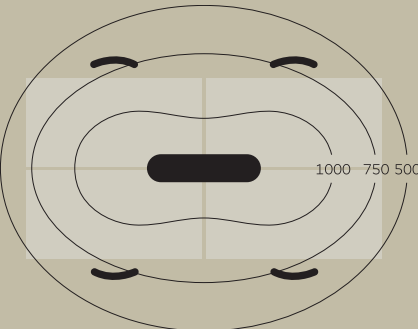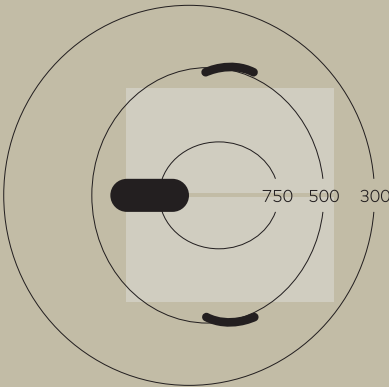

kido 12





kido 50



kido 56





30% direct, 70% indirect

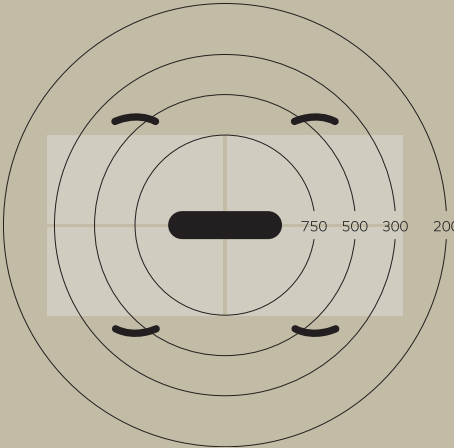

kido 46





30% direct, 70% indirect

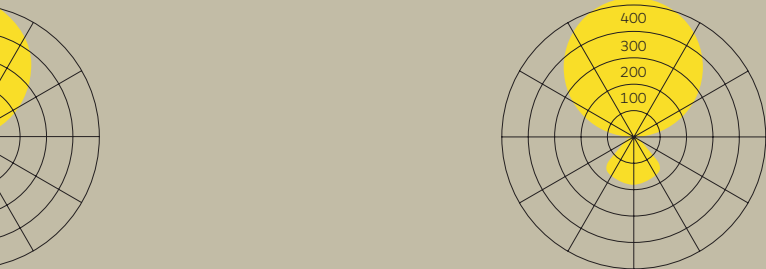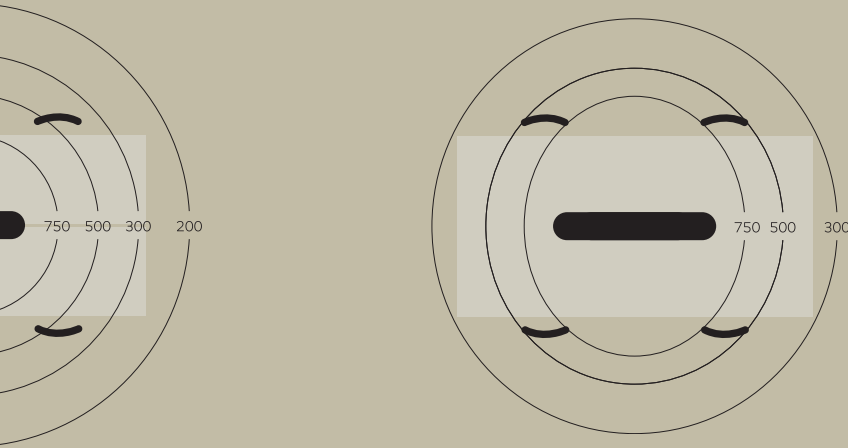

kido 30



30% direct, 70% indirect

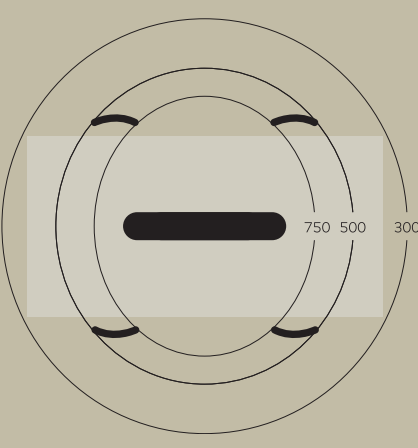


kido 32

belux

kido

# Unsurpassed room-filling and homogeneous light

The innovation aspect of belux kido lies in the ingenious decoupling plate with its increasing density of decoupling points over the entire light path. This provides homogeneous illumination of the workplace, plus extremely uniform brightness at the head of the luminaire.

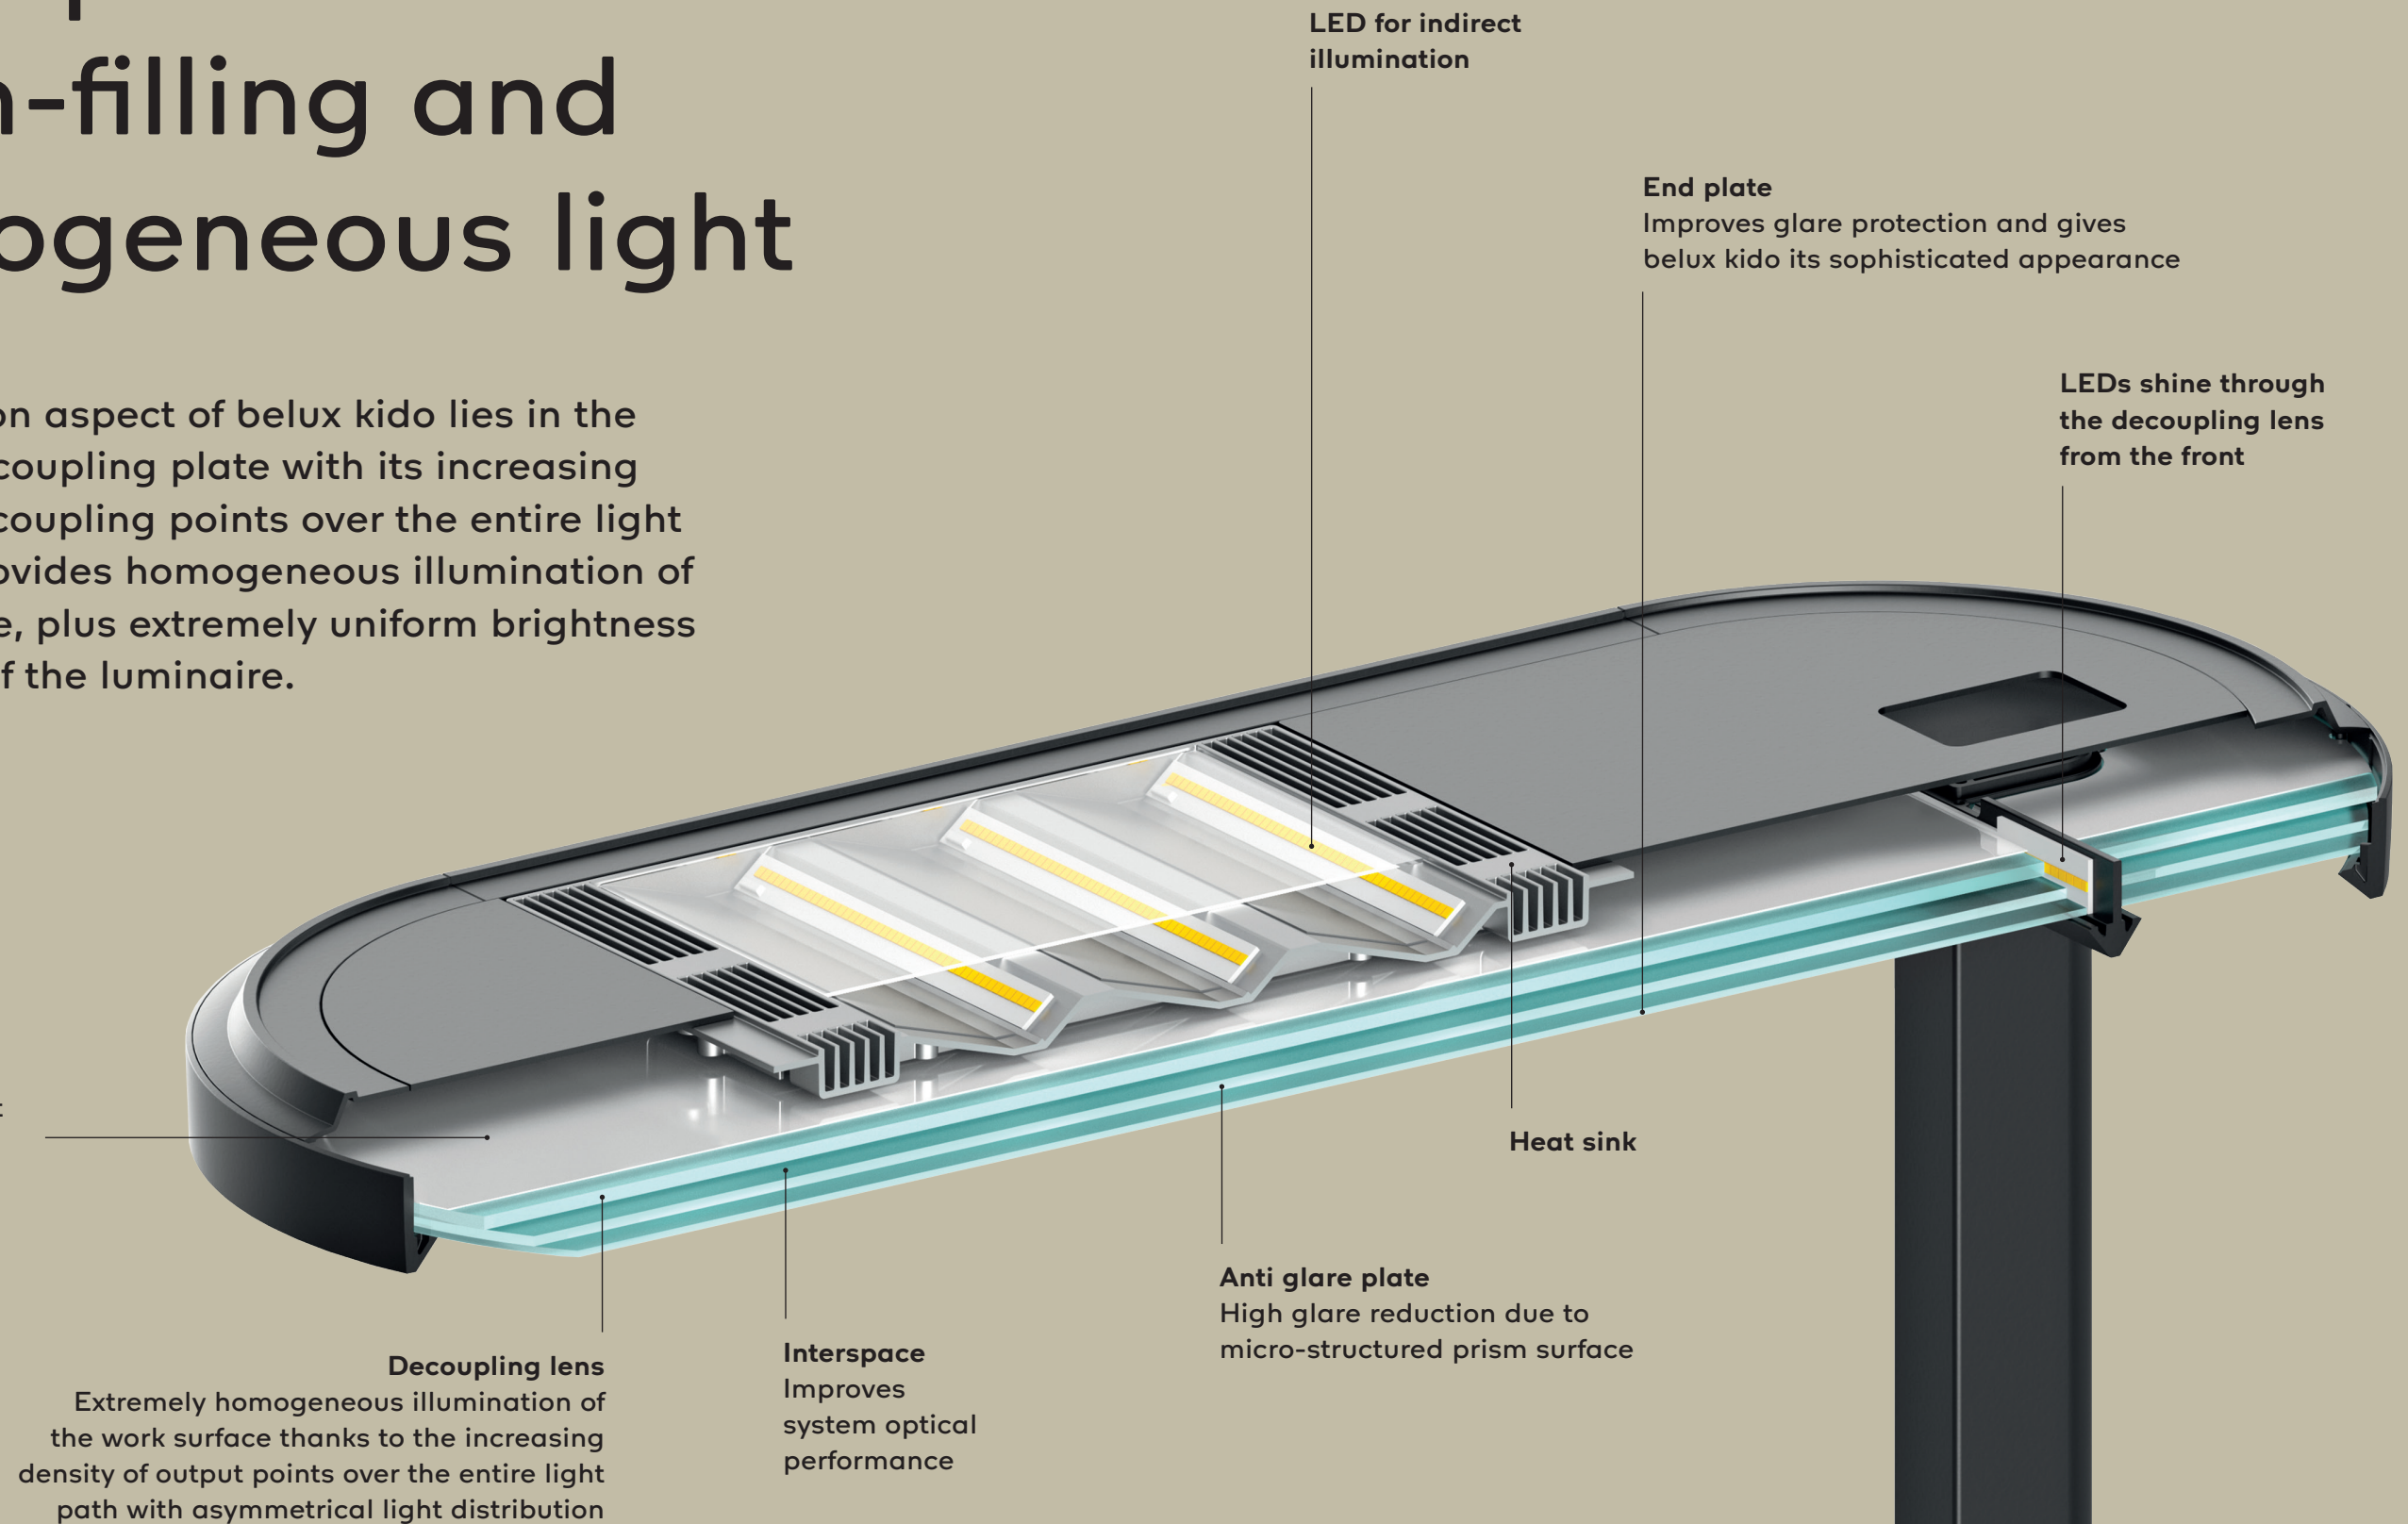

belux

kido



14

15

# belux

11200 lumen output makes belux kido a real powerhouse. The high direct light component of 20% efficiently directs a lot of light to the workplace. And this with just 90 watts of energy consumption for two workstations. As well as the high light yield, the optional 'Multisens' version with daylight and presence sensor has even more savings potential.



Off



Direct

# kido



Indirect



Direct & Indirect

# belux



Touch button for direct and indirect light

# kido



Light source  
LED, 90W,  
11200lm  
CRI>80  
3000K, 4000K



Light distribution  
Asymmetric:  
20% direct, 80% indirect  
Symmetric:  
30% direct, 70% indirect



Optic  
Optical system with  
light guidance and  
anti-glare plates



Light management  
Touchdim & Multisens.  
Swarm technology  
on request



Energy-efficiency classification LED  
A+




Colors  
Black & White

belux


kido



kido standing light  
U-base

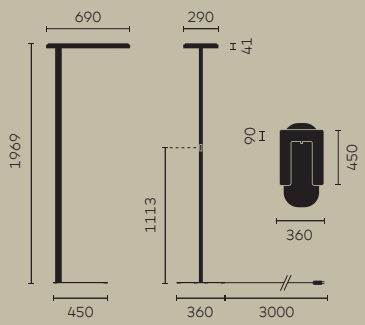

kido standing light  
T-base

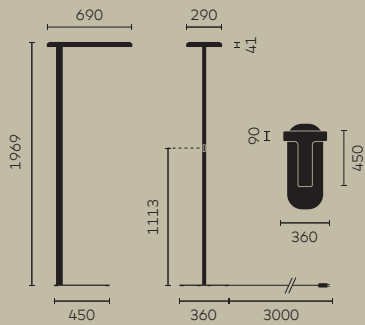

kido standing light U-base  
asymmetrical output

Material: PMMA, aluminium, steel, black power cable ≈ 3m  
Application : 2 workstations

kido standing light T-base  
asymmetrical output

Material: PMMA, aluminium, steel, black power cable ≈ 3m  
Application : 2 workstations

Colour

Light source

Basic code

8030  
3000K

8040  
4000K

TD

Dimmable, on stand

MS

Multisens, self-adjusting

Order number

WE

①

KID12-15

●

●

●

●

KID12-15-8030-TD  
KID12-15-8030-MS  
KID12-15-8040-TD  
KID12-15-8040-MS

SW

①

KID12-18

●

●

●

●

KID12-18-8030-TD  
KID12-18-8030-MS  
KID12-18-8040-TD  
KID12-18-8040-MS

WE

①

KID12-15T

●

●

●

●

KID12-15T-8030-TD  
KID12-15T-8030-MS  
KID12-15T-8040-TD  
KID12-15T-8040-MS

SW

①

KID12-18T

●

●

●

●

KID12-18T-8030-TD  
KID12-18T-8030-MS  
KID12-18T-8040-TD  
KID12-18T-8040-MS




REMARKS


General: Light distribution:  
20% direct/80% indirect  
UGR<10, LED service  
life: 55,000h (L85),  
converter integrated in  
luminaire pole  
TD: Direct and indirect  
light can be separately  
switched and dimmed  
by means of a 2 circuit  
push button  
Multisens: Daylight and  
motion sensor for automat-  
ic operation, individual  
parameter adjustment  
on request

Wireless Dim: Control via  
Casambi App or wireless  
'Casambi Xpress Switch'  
on request  
① CRI90+: On request  
WE: White  
SW: Black  
⊕ IP 20  
LED A+


kido 12  
125lm/W@4000K




kido standing light  
double head H-base

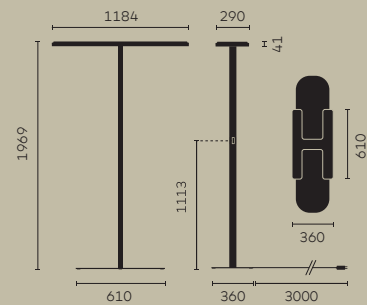

kido standing light  
double head X-base

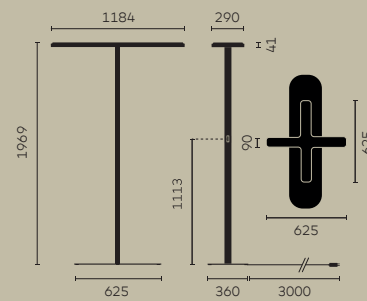

kido desk-mounted  
double head



red**dot** winner 2022  
lighting design

|   |     | CRI ①    | CCT        | Wattage | Lumen@4000K |
|---|-----|----------|------------|---------|-------------|
| ① | LED | CRI > 80 | 3000/4000K | 2x90W   | 2x11200lm   |

Colour

Light source

## Basic code

**8030**  
**3000K**

$$\begin{array}{r} 40004 \\ \hline 8040 \end{array}$$

TD

Dimmable, on stand

MS

## Multisens, self-adjusting

Order number

|    |   |                  |   |   |   |   |                                                                                  |
|----|---|------------------|---|---|---|---|----------------------------------------------------------------------------------|
| WE | ① | <u>KID50-15</u>  | ● | ● | ● | ● | KID50-15-8030-TD<br>KID50-15-8030-MS<br>KID50-15-8040-TD<br>KID50-15-8040-MS     |
| SW | ① | <u>KID50-18</u>  | ● | ● | ● | ● | KID50-18-8030-TD<br>KID50-18-8030-MS<br>KID50-18-8040-TD<br>KID50-18-8040-MS     |
| WE | ① | <u>KID50-15X</u> | ● | ● | ● | ● | KID50-15X-8030-TD<br>KID50-15X-8030-MS<br>KID50-15X-8040-TD<br>KID50-15X-8040-MS |
| SW | ① | <u>KID50-18X</u> | ● | ● | ● | ● | KID50-18X-8030-TD<br>KID50-18X-8030-MS<br>KID50-18X-8040-TD<br>KID50-18X-8040-MS |
| WE | ① | <u>KID56-15</u>  | ● | ● | ● | ● | KID56-15-8030-TD<br>KID56-15-8030-MS<br>KID56-15-8040-TD<br>KID56-15-8040-MS     |
| SW | ① | <u>KID56-18</u>  | ● | ● | ● | ● | KID56-18-8030-TD<br>KID56-18-8030-MS<br>KID56-18-8040-TD<br>KID56-18-8040-MS     |

## REMARKS

**General:** Light distribution:  
20% direct/80% indirect  
UGR<10, LED service  
life: 55,000h (L85),  
converter integrated in  
luminaire pole

**TD:** Direct and indirect  
light can be separately  
switched and dimmed  
by means of a 2 circuit  
push button

**Multisens:** Daylight and motion sensor for automatic operation, individual parameter adjustment on request

kido desk-mounted:

Desk adapter on request.  
Information furniture  
manufacturer and furniture  
type (drawings) required  
**Wireless Dim:** Control via  
Casambi App or wireless  
'Casambi Xpress Switch'  
on request



① CRI90+: On request

**WE:** White


SW: Black

Ⓢ IP 20


LED A+




kido pendant light  
(1100mm)




 **kido pendant light (1100mm)**  
**Material:** PMMA, aluminium, transparant power cable




kido pendant light  
(1500mm)



 **kido pendant light (1500mm)**  
**Material:** PMMA, aluminium, transparant power cable



kido desk-mounted



 **kido desk-mounted light double head  
symmetrical output**  
**Material:** PMMA, aluminium, steel, black power cable ≈ 3m  
**Fixation:** universal-d  
**Application :** meeting table



|   |     | CRI ①    | CCT        | Wattage | Lumen@4000K |
|---|-----|----------|------------|---------|-------------|
| ① | LED | CRI > 80 | 3000/4000K | 91W     | 12500lm     |
| ② | LED | CRI > 80 | 3000/4000K | 116W    | 16200lm     |


| Colour | Light source | Basic code | 8030<br>3000K | 8040<br>4000K | DD<br>Dimmable DALI, on site | MS<br>Multisens, self-adjusting | Order number |
|--------|--------------|------------|---------------|---------------|------------------------------|---------------------------------|--------------|
|--------|--------------|------------|---------------|---------------|------------------------------|---------------------------------|--------------|

|    |   |                 |   |   |   |   |                                                                              |
|----|---|-----------------|---|---|---|---|------------------------------------------------------------------------------|
| WE | ① | <u>KID30-14</u> | ● | ● | ● | ● | KID30-14-8030-DD<br>KID30-14-8030-MS<br>KID30-14-8040-DD<br>KID30-14-8040-MS |
| SW | ① | <u>KID30-17</u> | ● | ● | ● | ● | KID30-17-8030-DD<br>KID30-17-8030-MS<br>KID30-17-8040-DD<br>KID30-17-8040-MS |
| WE | ② | <u>KID32-14</u> | ● | ● | ● | ● | KID32-14-8030-DD<br>KID32-14-8030-MS<br>KID32-14-8040-DD<br>KID32-14-8040-MS |
| SW | ② | <u>KID32-17</u> | ● | ● | ● | ● | KID32-17-8030-DD<br>KID32-17-8030-MS<br>KID32-17-8040-DD<br>KID32-17-8040-MS |
| WE | ① | <u>KID46-15</u> | ● | ● | ● | ● | KID46-15-8030-TD<br>KID46-15-8030-MS<br>KID46-15-8040-TD<br>KID46-15-8040-MS |
| SW | ① | <u>KID46-18</u> | ● | ● | ● | ● | KID46-18-8030-TD<br>KID46-18-8030-MS<br>KID46-18-8040-TD<br>KID46-18-8040-MS |


**REMARKS**  
**General:** Light distribution:  
30% direct/70% indirect,  
UGR<11, LED service life:  
55,000h (L85), converter  
integrated in luminaire  
**Dimmable DALI:** Features  
two addresses, one each  
for the direct light and  
indirect light  
**Multisens:** Daylight and  
motion sensor for automat-  
ic operation, individual  
parameter adjustment  
on request

**Wireless Dim:** Control via  
Casambi App or wireless  
'Casambi Xpress Switch'  
on request  
**① CRI90+:** On request  
**WE:** White  
**SW:** Black  
⊕ IP 20  
LED A+

kido 30/46  
137lm/W@4000K



kido 32  
140lm/W@4000K



## belux HQ

Neufeldweg 6  
5103 Möriken  
Switzerland  
T +41 61 316 74 01  
belux@belux.com

## belux Belgium

Industrieweg Noord 1152  
3660 Oudsbergen  
Belgium  
T +32 89 81 97 80  
belgium@belux.com

## belux Austria

Kärntner Ring 4  
1010 Vienna  
Austria  
T +43 1 715 44 25  
austria@belux.com

## belux China

Rm 208, Building 5, N° 33  
Lane 672, Changle Road  
JingAn District  
Shanghai  
P.R. China  
china@belux.com

## belux France

5, rue d'Aboukir  
75002 Paris  
France  
T +33 1 44 50 53 54  
france@belux.com

## belux Germany

Brühler Straße 11-13  
50968 Cologne  
Germany  
Tel +49 221 937 22 0  
germany@belux.com

## belux Italy

Via V. Forcella 5  
20144 Milano  
Italy  
T +39 02 89 42 08 46  
italy@belux.com

## belux Middle East

Dubai Airport Free  
Zone Area (DAFZA)  
West Wing 6 (W6)  
Office 6 WA 420  
P.O. Box 293845  
Dubai  
United Arab Emirates  
T +971 4 6091 355  
middle.east@belux.com

## belux North America & Canada

20 Murray Hill Parkway  
Suite 180  
East Rutherford, NJ 07073  
USA  
T +1 516 470 9522  
usa@belux.com

## belux Poland

T +48 504 788 355  
Poland  
poland@belux.com

## belux Russia

T +79257081901  
Russia  
russia@belux.com

## belux Scandinavia

T +45 (0)71 37 02 39  
scandinavia@belux.com

## belux South East Asia

63a Club Street  
Singapore 069 437  
Singapore  
T +65 62 22 33 93  
singapore@belux.com

## belux Spain

Ángel Guimera 7-9 local C  
Barcelona 08017  
Spain  
T +34 600 462 551  
spain@belux.com

## belux The Netherlands

Danzigerbocht 39a  
1013 AM Amsterdam  
The Netherlands  
T +31 (0)2 02 153 333  
the.netherlands@belux.com


## belux Turkey

Sehit Murat Demirli  
Cad. Resadiye Yolu 76  
Alemdag-Ümraniye 34794  
Istanbul  
Turkey  
T +90 216 430 86 00  
turkey@belux.com

## belux UK

67 Maltings Place  
169 Tower Bridge Road  
London SE1 3LJ  
United Kingdom  
T +44 (0)20 7740 2112  
uk@belux.com



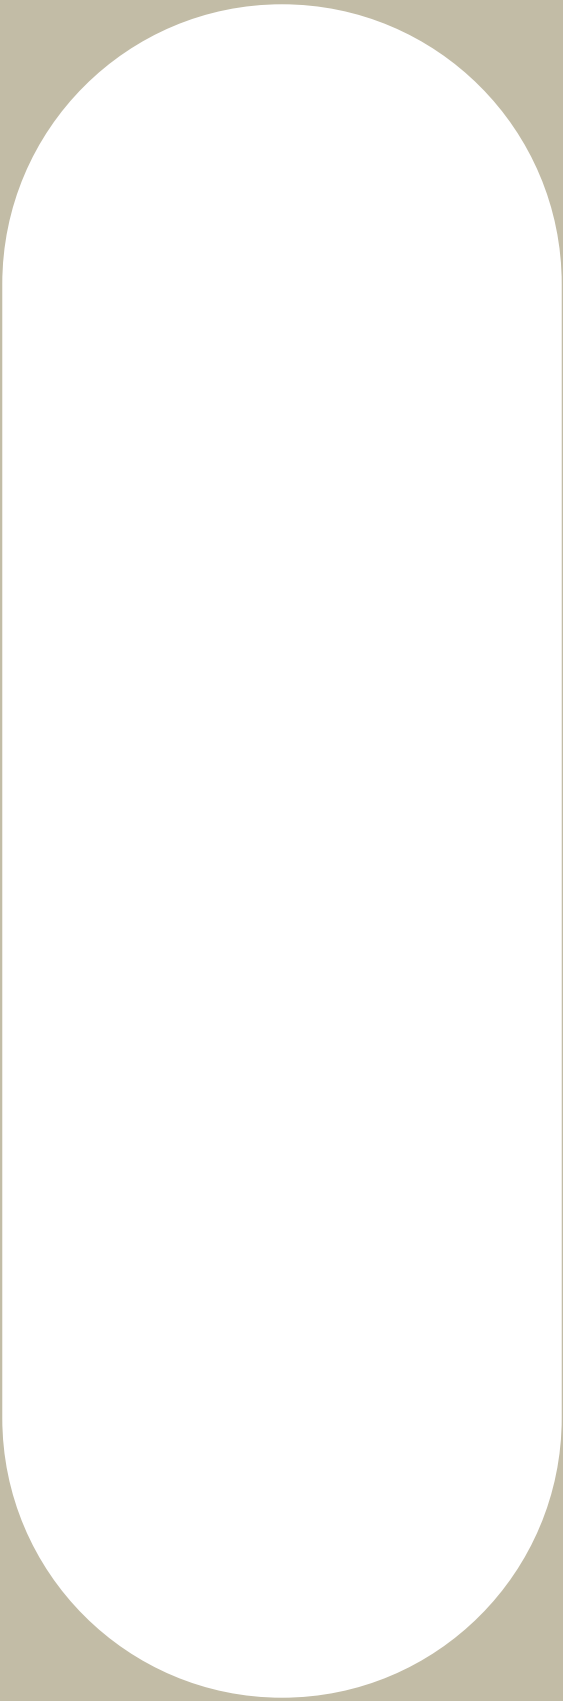

[belux.com/kido](https://belux.com/kido)