


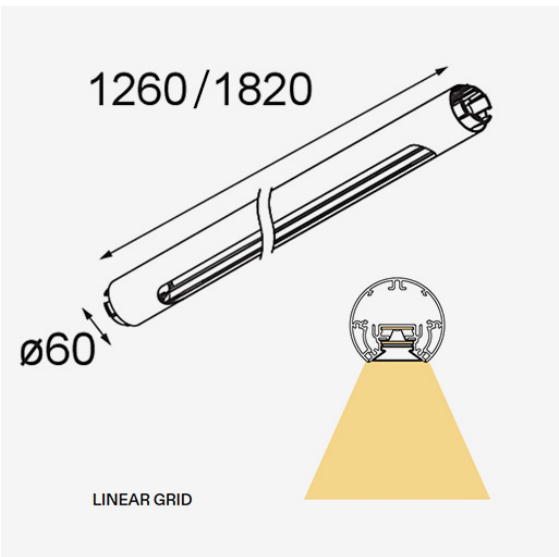


Date
Customer
Project
Type

Straw 60 Linear Grid 1260-1820 1x LED

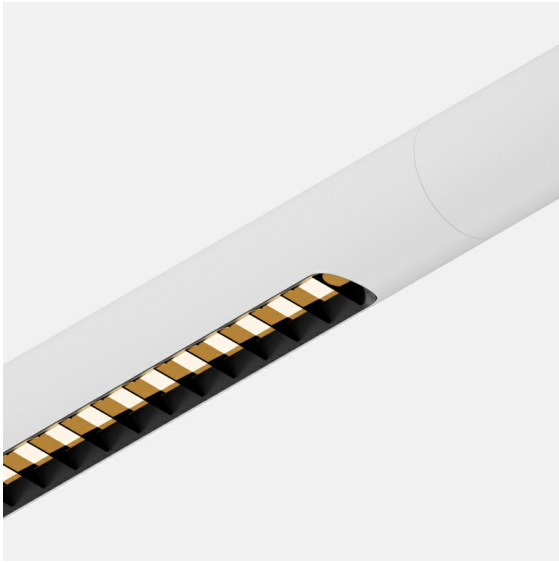

Specifications

Material	
Light Source Type	LED
LED Type	LEDLINE STRAW PRO9
LED technology	LED PCB
CRI	Min. 90
Colour Temperature	2700K/3000K/4000K
Lifetime	L95B05 @50,000 Hours
Number of Light Sources	1
CIE flux code	76 98 100 100 57
Binning (SDCM)	3
Light Direction	Down
Measured beam angle (°)	91.0
Input Voltage	230V
Luminaire power (W)	29W/36.2W (1260) 43W/55W (1820)
IP Rating	20
Dimming Protocol	Non Dim / DALI
Application	Ceiling
Primary Colour & Primary Finish	Black / White Structure, Brushed Champagne / Bronze / Black / Silver Bronze, Polished Alu / Black
Gross weight (g)	0.001
Delivered lumens (lm)	<3492lm (1260) / <5238lm (1820)
Efficacy (lm/W)	up to 94
Glare rating	UGR<19 @ (75% preset) / UGR<23 @ 100%
Remark	• Glare Rating for SHR 1.0H; X=4H, Y=8H