


Project Name

Qty

Type

Catalog / Part Number

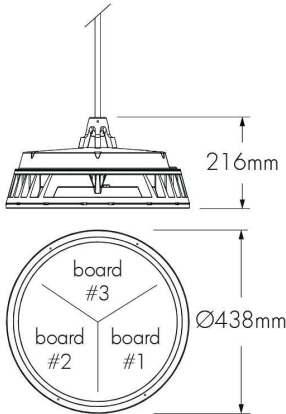

Front view

Bottom view


Photometric Summary

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
XN (3°)	18,088	1,905,000
VN (6°)	20,085	935,600
NS (10°)	19,256	567,230
NF (20°)	23,345	239,784
M (30°)	21,933	89,383
FL (40°)	21,118	45,698
WFL (60°)	19,736	17,740

Asymmetric		
NAS	12,437	191,810
WW	19,371	47,099

Based on HO 4000K configuration.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Optic

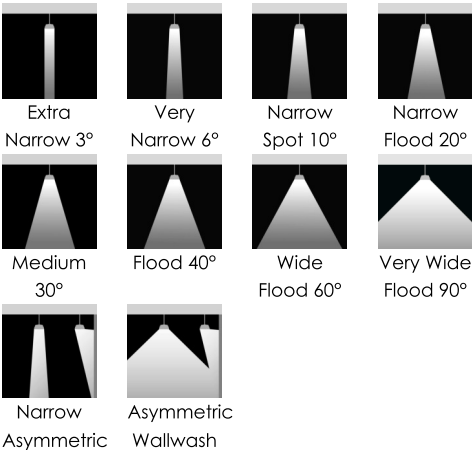

Description


The Lumenbeam XLarge Pendant is an IP66-rated suspended luminaire for high ceiling applications such as airport terminals and large public atriums. It has numerous options, including two outputs RO (140W) and HO (205W), optics for flood or accent lighting, a choice of colour temperatures and colours, various stem lengths, accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Features

Colour and Colour Temperature	22K: 2200K, 27K: 2700K, 30K: 3000K, 35K: 3500K, 40K: 4000K, 57K: 5700K, RD: Red, GR: Green, BL: Blue
Mounting Length	12: 305 mm, 24: 610 mm, 36: 914 mm, 48: 1219 mm
Optics (Nominal Distribution)	XN: XN (3°), VN: VN (6°), NS: NS (10°), NF: NF (20°), M: M (30°), FL: FL (40°), WFL: WFL (60°), VWFL: VWFL (90°), NAS: NAS (Narrow Asymmetric), WW: WW (Asymmetric Wallwash)
Optical Option	LSLH: Linear Spread Lens Horizontal Distribution, LSLV: Linear Spread Lens Vertical Distribution
Option	CRC: Corrosion-Resistant Coating for Hostile Environments
Cable Colour	BK: Black, WH: White
Power Consumption	140 W (RO version), 205 W (HO version)
Warranty	5-year limited warranty

Performance	
Maximum Delivered Output	18,209 lm (4000K, NF 20°, RO version) 23,345 lm (4000K, NF 20°, HO version)
Maximum Delivered Intensity	1,485,900 cd at nadir (4000K, XN 3°, RO version) 1,905,000 cd at nadir (4000K, XN 3°, HO version)
Illuminance at Distance	Minimum 1 lx at 1224 m (4000K, XN 3°, RO version) Minimum 1 lx at 1386 m (4000K, XN 3°, HO version)
Colour Consistency	2 SDCM
Colour Rendering	Minimum CRI 80
Lumen Maintenance	L70 B50 > 250,000 hrs (Ta 25 °C) (> 80,000 hrs for XN 3°, VN 6°, NAS optics only)

Colour and Colour Temperature

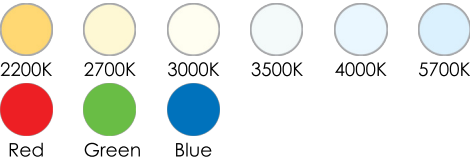

Control

ON/OFF 0-10V DALI DMX/RDM



Ratings

IP66 fixture IP54 canopy IK09

Certifications



Physical

Housing Material	Low copper content high pressure die-cast aluminium
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	16.33 kg

Electrical and Control

Voltage	100 to 277 volts
Fixture Cable	Power and data cable goes through stem
Conductors	3C: 3 x 1,5 mm ² (NO, LT control) 5C: 5 x 1,5 mm ² (DIM, DALI, ES control) 6C: 3 x 1,5 mm ² / 3 x 0,20 mm ² (DMX/RDM control)
Inrush Current (Peak)	LBX RO: 65A @230VAC LBX HO: 75A @230VAC

Control	On/Off Control, Lumentalk, 1-10V Dimming, DALI Dimming, DMX/RDM Enabled
Resolution (DMX/RDM)	Per fixture, 8-bit or 16-bit

Environmental


Storage Temperature	-40 °C to 70 °C (device must reach start-up temperature value before operating)
Start-up Temperature	-25 °C to 50 °C
Operating Temperature	-40 °C to 50 °C
Ingress Protection Rating	IP66 fixture (wet location rated) IP54 canopy (suitable for wet location, not suitable for water jet)
Impact Resistance Rating	IK09

Accessories (Order Separately)


Optical Accessories	Lumenbeam LBX Snoot, Lumenbeam LBX Snoot Wide, Lumenbeam LBX Visor, Lumenbeam LBX Linear Spread Lens Adjustable, Lumenbeam LBX Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Lumenscene™ (LSC), Pharos® Lighting Control Kit (PHAROS)
Diagnostic and Addressing Tools	LumenID (LID)

Chromaticity Data

TM-30 - 4000K




Spectral Power Distribution

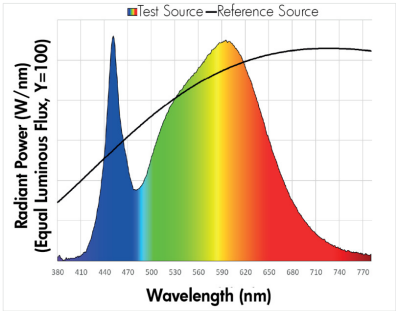


Mounting Types

SCAN - Standard Straight Stem Canopy

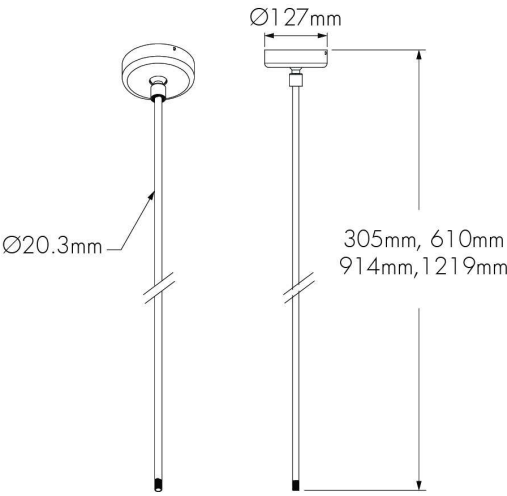

Not suitable when fixture is exposed to wind.
Suitable for under canopy installation only.
No vibration rating.

ACAN - Adjustable Sloped Ceiling Canopy

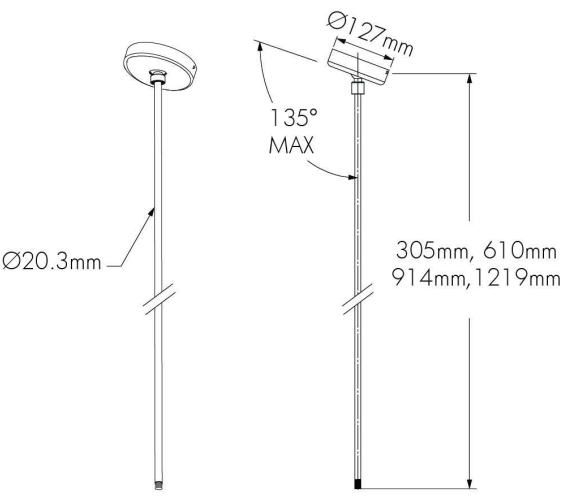


Not suitable when fixture is exposed to wind.
Suitable for under canopy installation only.
No vibration rating.

Optical Options

LSLH - Linear Spread Lens Horizontal Distribution



LSLV - Linear Spread Lens Vertical Distribution



Beam Angles


Optic installed in fixture	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	8° x 50°
NS	9° x 56°
NF	17° x 57°
M	27° x 68°
FL	37° x 74°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).


Optical Accessories (Order Separately)

SN - Snoot

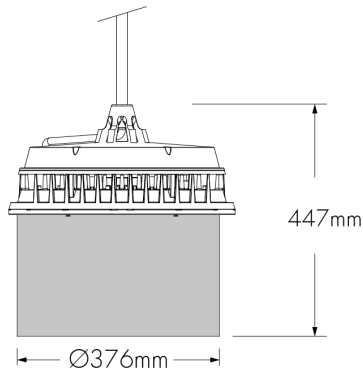


LBXSN-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

SNW - Snoot Wide

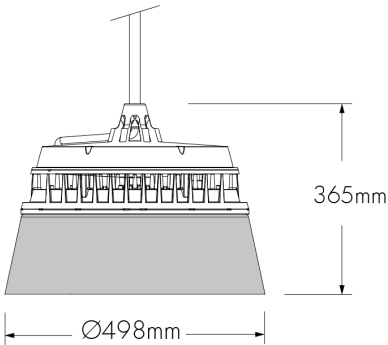


LBXSNW-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

VS - Visor

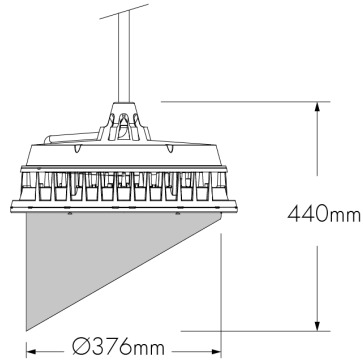


LBXVS-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

LSLA - Linear Spread Lens Adjustable



LBXLSLA-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard



LBXWG-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBXSNLSLA	N/A*	LBXVLSLA
Wire guard	LBXSNWG	N/A	LBXVSWG

Accessory combinations must be ordered together on a single line.
Ex: A snoot + wire guard combination order code is **LBXSNWG-FINISH-BK-OPTIONS**. A maximum of two accessories can be combined per fixture.
*Consult factory for a linear spread lens adjustable + snoot wide combination.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147689

Diffuser Lens 2 (2 Notches)




147690

Diffuser Lens 3 (3 Notches)




147691

Diffuser Lens 4 (4 Notches)




147692

Diffuser Lens 5 (5 Notches)



147693

Diffuser Lens 6 (6 Notches)



147694

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBSLSLA-**FINISH**-LBALK **LBM/LBMP**: LBMLSAL-**FINISH**-LBALK **LBL/LBLP**: LBLLSLA-**FINISH**-LBALK **LBG/LBGP**: LBGLSLA-**FINISH**-LBALK **LBX/LBXP**: LBXLSLA-**FINISH**-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

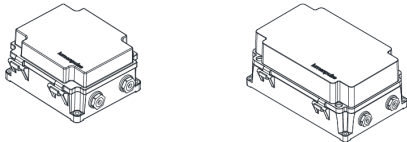

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

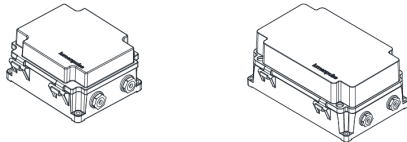

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

Lumenscene



The Lumenscene, a user-friendly DMX/RDM lighting controller that includes eight preconfigured scene changes and can be programmed via RDM.

PHAROS - Pharos® Kit

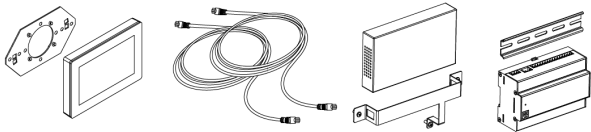

The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.


Typical Wiring Diagrams

Wiring Colour Code

CE Colour Code	USE
Yellow/Green	Ground
Brown	Line
Blue	Line/Neutral
Black or Purple	1-10V / Data +
Grey or Orange	1-10V / Data -
Grey	Signal common (DMX/RDM only)


CE Class II Colour Code		USE
All other controls	DMX/RDM	
Brown	Brown	Line
Blue	Blue	Line/Neutral
Black 1	Grey	Signal common (DMX/RDM only)
Black 2	Black or Purple	1-10V / Data +
Grey	Grey or Orange	1-10V / Data -
N/A	Yellow/Green	Ground (do not connect)

On/Off Control (NO)

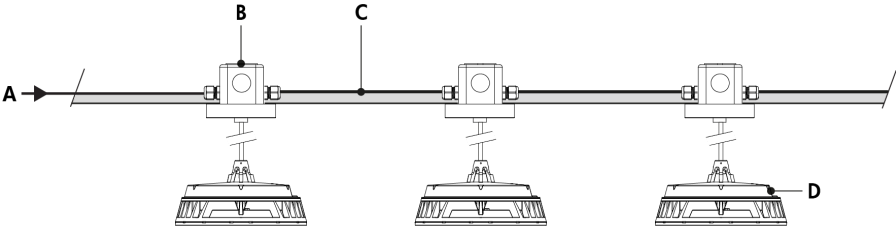


- A - Power input (100-277V AC, wiring by others)
- B - Junction box (by others)
- C - Power wiring (by others)
- D - Lumenbeam LBX Pendant

On/Off Control (NO) - Wiring Detail - CE

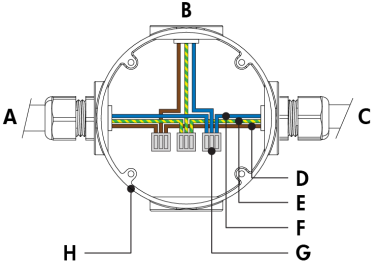

- A - Power input or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Terminal connector (by others)
- H - Junction box (by others)


On/Off Control (NO) - Wiring Detail - CE Class II

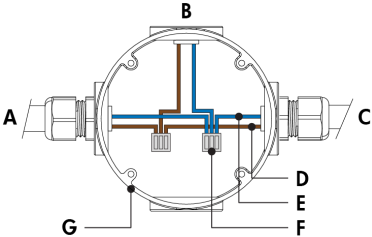

- A - Power input or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Line/Neutral
- F - Terminal connector (by others)
- G - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Regular Output version: 140 watts per fixture, High Output version: 205 watts per fixture.

Lumentalk (LT)

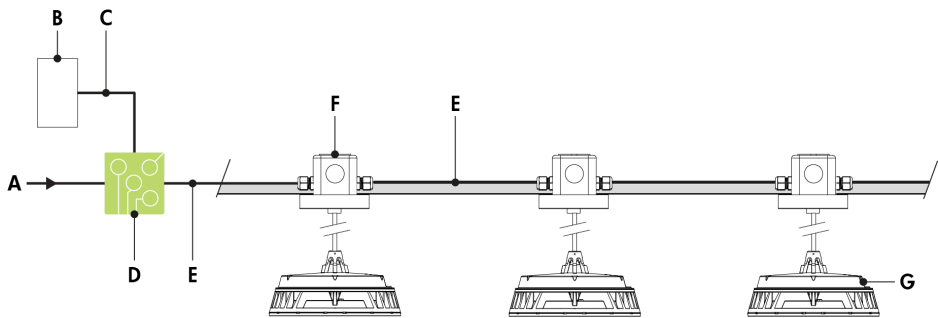

- A** - Power input (100-277V AC, wiring by others)
- B** - Dimmer/controller (order separately from Lumenpulse, or by others)
- C** - Data wiring (by others)
- D** - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
- E** - Power wiring (by others)
- F** - Junction box (by others)
- G** - Lumenbeam LBX Pendant


Lumentalk (LT) - Wiring Detail - CE

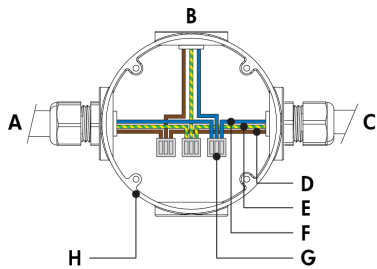

- A** - Power input (control over power line via Lumentalk system) or from previous fixture
- B** - To fixture
- C** - To next fixture
- D** - Line
- E** - Ground
- F** - Line/Neutral
- G** - Terminal connector (by others)
- H** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colours is 1 minute). Consult factory for applications that require additional capabilities.
- Consult factory for DALI Lumentalk applications.
- 1% minimum dimming value.
- Regular Output version: 140 watts per fixture, High Output version: 205 watts per fixture.

1-10V Dimming (DIM)

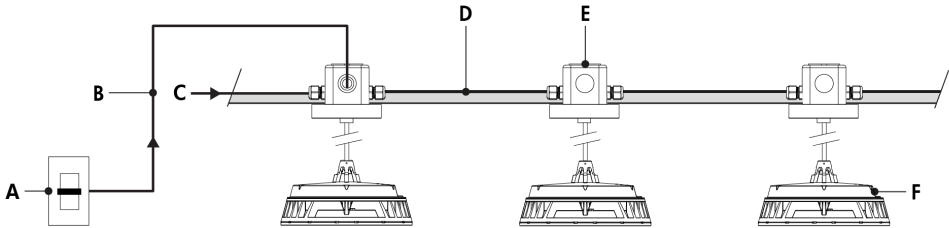


- A - Dimmer (by others)
- B - Data wiring (by others)
- C - Power input (100-277V AC, wiring by others)
- D - Power and data wiring (by others)
- E - Junction box (by others)
- F - Lumenbeam LBX Pendant

1-10V Dimming (DIM) - Wiring Detail - CE

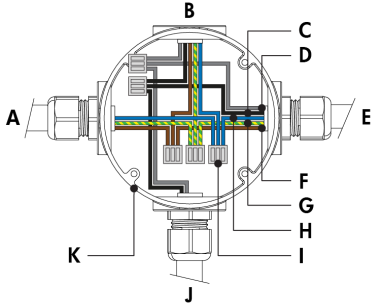

- A - Power input or from previous fixture
- B - To fixture
- C - 1-10 V +
- D - 1-10 V -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Terminal connector (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


1-10V Dimming (DIM) - Wiring Detail - CE Class II

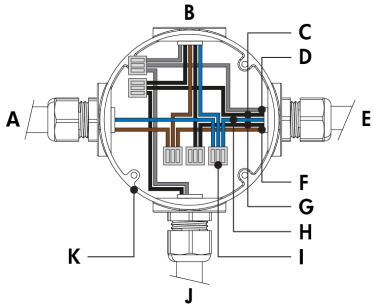

- A - Power input or from previous fixture
- B - To fixture
- C - 1-10 V + (black 2)
- D - 1-10 V -
- E - To next fixture
- F - Line
- G - Signal common (black 1)
- H - Neutral
- I - Terminal connector (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 1-10V mA ratings: passive dimmer (Current Sink): 3mA per fixture, active dimmer (Current Source): 0.5mA per fixture.
- 1% minimum dimming value.
- Regular Output version: 140 watts per fixture, High Output version: 205 watts per fixture.

DALI Dimming (DALI)

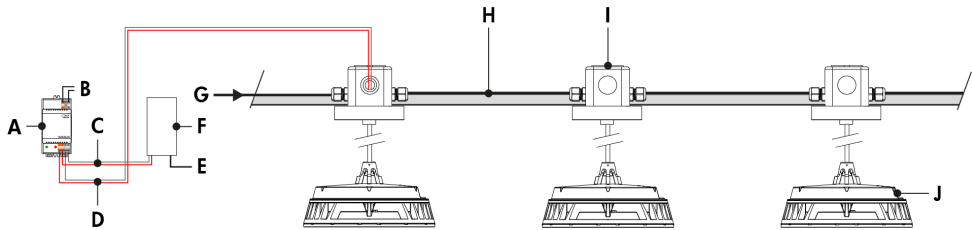


- A - DALI bus power supply (by others)
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (wiring by others)
- D - Data output to fixture (wiring by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - DALI controller (by others)
- G - Power input (100-277V AC, wiring by others)
- H - Power and data wiring (by others)
- I - Junction box (by others)
- J - Lumenbeam LBX Pendant

DALI Dimming (DALI) - Wiring Detail - CE

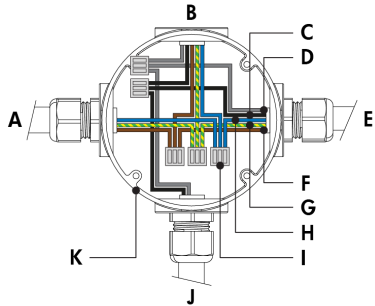

- A - Power input or from previous fixture
- B - To fixture
- C - DA +
- D - DA -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)


DALI Dimming (DALI) - Wiring Detail - CE Class II

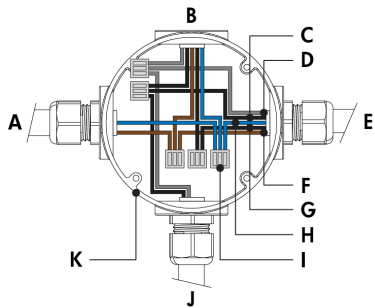

- A - Power input or from previous fixture
- B - To fixture
- C - DA + (black 2)
- D - DA -
- E - To next fixture
- F - Line
- G - Signal common (black 1)
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 1% minimum dimming value.
- Regular Output version: 140 watts per fixture, High Output version: 205 watts per fixture.

Star Layout (DMX/RDM)

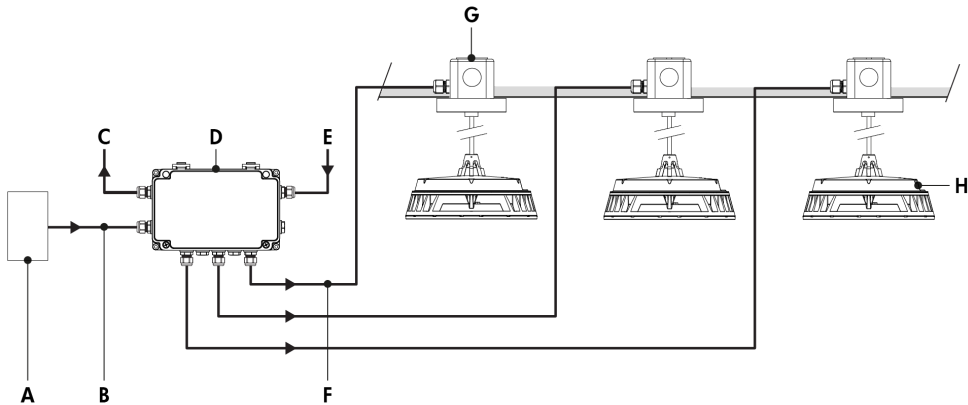


- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-ST
- E** - Power input (100-277V AC, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Lumenbeam LBX Pendant

Star Layout (DMX/RDM) - Wiring Detail - CE



- A** - From CBX
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Terminal connector (by others)
- K** - Junction box (by others)

Star Layout (DMX/RDM) - Wiring Detail - CE Class II



- A** - From CBX
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground (do not connect)
- H** - Line
- I** - Signal common
- J** - Terminal connector (by others)
- K** - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBXP RO	8	12	14	16
LBXP HO	5	9	10	11

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 1% minimum dimming value.
- Regular Output version: 140 watts per fixture, High Output version: 205 watts per fixture.

Daisy Chain Layout (DMX/RDM)

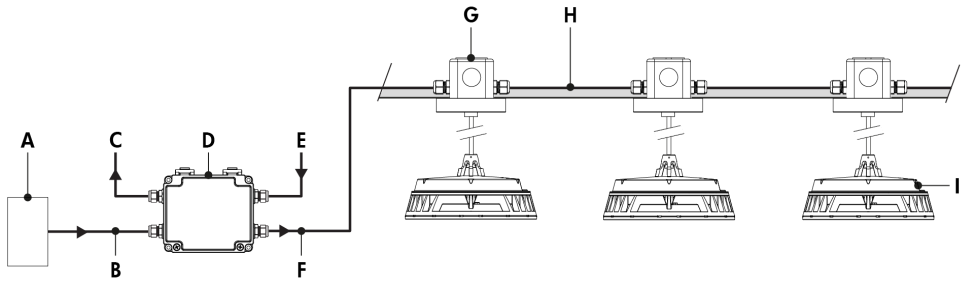


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Power and data wiring (by others)
- I - Lumenbeam LBX Pendant

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First Or Middle Of Run) - CE

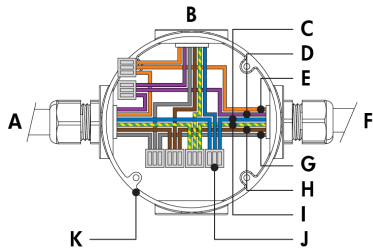


- A - From CBX or previous fixture
- B - To fixture
- C - Neutral
- D - Data +
- E - Data -
- F - To next fixture
- G - Signal common
- H - Line
- I - Ground
- J - Terminal connector (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End Of Run) - CE




- A - From CBX or previous fixture
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run) - CE Class II

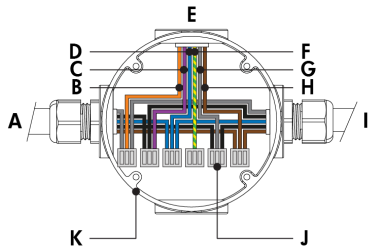

- A - From CBX or previous fixture
- B - Data -
- C - Data +
- D - Neutral
- E - To fixture
- F - Ground (do not connect)
- G - Signal common
- H - Line
- I - To next fixture
- J - Terminal connector (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run) - CE Class II



- A - From CBX
- B - Lumeterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground (do not connect)
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBXP RO	8	12	14	16
LBXP HO	5	9	10	11

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.

- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 0.9 m cable length between fixture and next junction box for daisy chain layout.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumeterminators included per CBX-DS. See installation instructions for details.
- 1% minimum dimming value.
- Regular Output version: 140 watts per fixture, High Output version: 205 watts per fixture.

How to Order

Housing	Voltage	Colour and Colour Temperature ⁽¹⁾	Optic1	Optic2	Optic3	Mounting Type	Mounting Length ⁽⁸⁾	Optical Option ⁽⁹⁾ ⁽¹¹⁾	Finish	
LBXP RO Lumenbeam™ XLarge, Regular Output, 140W LBXP HO Lumenbeam™ XLarge, High Output, 205W	100 100 Volts	22K 2200K	XN Extra Narrow 3° ⁽⁴⁾	XN Extra Narrow 3° ⁽⁴⁾	XN Extra Narrow 3° ⁽⁴⁾	SCAN Straight Stem Canopy ACAN Adjustable Sloped Ceiling Canopy	12 305 mm	LSLH Linear Spread Lens Horizontal Distribution ⁽¹⁰⁾ LSLV Linear Spread Lens Vertical Distribution ⁽¹⁰⁾	BK Black Sandtex®	
	120 120 Volts	27K 2700K	VN Very Narrow 6° ⁽⁴⁾	VN Very Narrow 6° ⁽⁴⁾	VN Very Narrow 6° ⁽⁴⁾		24 610 mm		BRZ Bronze Sandtex®	
	208 208 Volts	30K 3000K	NS Narrow Spot 10° ⁽⁴⁾	NS Narrow Spot 10° ⁽⁴⁾	NS Narrow Spot 10° ⁽⁴⁾		36 914 mm		SI Silver Sandtex®	
	220 220 Volts	35K 3500K	NF Narrow Flood 20° ⁽⁴⁾	NF Narrow Flood 20° ⁽⁴⁾	NF Narrow Flood 20° ⁽⁴⁾		48 1219 mm		WH Smooth White	
	240 240 Volts	40K 4000K	M Medium 30° ⁽⁴⁾	M Medium 30° ⁽⁴⁾	M Medium 30° ⁽⁴⁾				BKTX Textured Black	
	277 277 Volts	57K 5700K	FL Flood 40° ⁽⁴⁾	FL Flood 40° ⁽⁴⁾	FL Flood 40° ⁽⁴⁾				BRZTX Textured Bronze Non-Metallic	
		RD Red ^{(2) (3)}	WFL Wide Flood 60° ^{(4) (5)}	WFL Wide Flood 60° ^{(4) (5)}	WFL Wide Flood 60° ^{(4) (5)}				GRATX Textured Medium Grey	
		GR Green ^{(2) (3)}	VWFL Very Wide Flood 90° ^{(4) (5) (6)}	VWFL Very Wide Flood 90° ^{(4) (5) (6)}	VWFL Very Wide Flood 90° ^{(4) (5) (6)}				GRNTX Textured Green	
		BL Blue ^{(2) (3)}	NAS Narrow Asymmetric ⁽⁴⁾	NAS Narrow Asymmetric ⁽⁴⁾	NAS Narrow Asymmetric ⁽⁴⁾				WHTX Textured White	
			WW Asymmetric Wallwash ^{(4) (7)}	WW Asymmetric Wallwash ^{(4) (7)}	WW Asymmetric Wallwash ⁽⁴⁾				CC Custom Colour & Finish ^{(12) (13) (14)}	

Notes:

1. Consult factory for availability of static Royal Blue, Amber, 6500K and 90+ CRI.

2. Static colours made to order 8-10 weeks.

3. Not available for XN optic.

4. Factory installed, not interchangeable on site.

5. Cannot be combined with other optics.

6. Consult factory for photometric performance.

7. Cannot be combined with other optics for Optic1 and Optic2 when a static white colour temperature is selected.

8. Consult factory for custom stem lengths.
9. Optical options are factory installed and cannot be changed in the field.

10. Field adjustable spread lens optical accessory available, order separately.

11. Not available with WFL, VWFL, NAS and WW optics.

12. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colours with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colours, other RAL textures and glosses, or to match alternate colour charts. Final colour matching results may vary.

13. Setup charges apply for RAL colours. Consult factory for details.

14. Longer lead times can be expected for custom RAL colour finishes.

How to Order

Control	Option	Certification	Cable Colour
NO On/Off Control LT Lumentalk ⁽¹⁵⁾ ⁽¹⁶⁾ DIM 1-10V Dimming DALI DALI Dimming DMX/RDM DMX/RDM Enabled ⁽¹⁷⁾	CRC Corrosion-Resistant Coating ⁽¹⁸⁾ ⁽¹⁹⁾	UL UL Compliant ⁽²⁰⁾ CE CE Compliant CEII CE Compliant Class II Double Insulated	BK Black WH White ⁽²¹⁾

- Notes:
- 15.** A Lumentranslator 2 (LTL2) and LumentalkID (LIDLT) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

16. Not available with Class II double insulated option.

17. A control box (CBX) and LumenID (LID) must be specified.

18. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

19. Setup charges apply. Consult factory for details.

20. Consult North American specification sheets and installation instructions for UL wiring information.

21. Not available with CE or CEII certification options.