


Project Name

Qty

Type

Catalog / Part Number

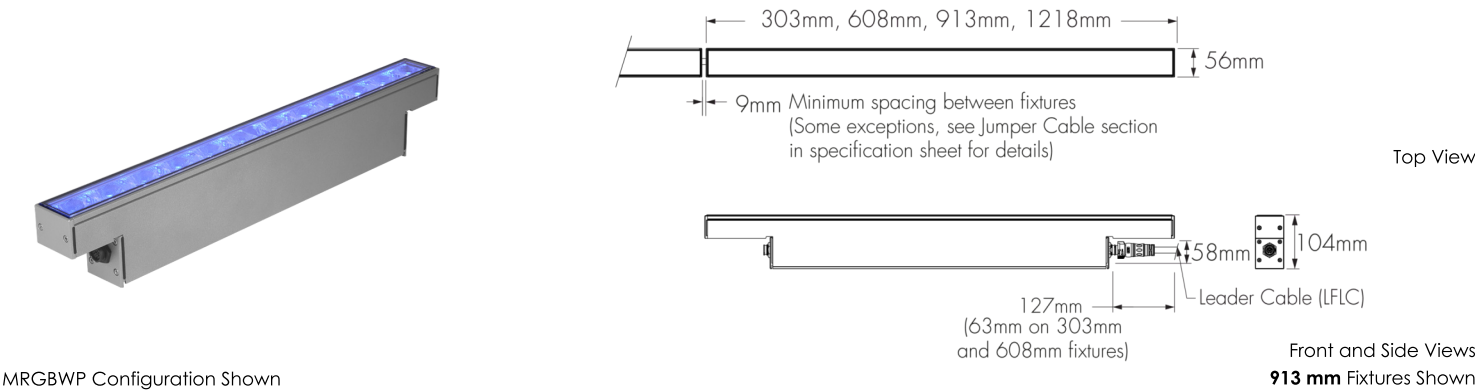

MRGBWP Configuration Shown

Photometric Summary (72.18 W/m, Opticolor+ MRGBWP)

Symmetric		
	Delivered Output (lm)	Intensity (Peak cd)
10°x10°	3,821	50,958
10°x30°	3,610	18,753
10°x60°	3,634	11,521
10°x90°	3,634	7,856
30°x30°	3,566	8,433
30°x60°	3,538	4,615
30°x90°	3,213	3,275
60°x60°	3,496	2,878
90°x90°	3,417	1,978
30°x10°	3,418	16,842
60°x10°	3,511	10,648
60°x30°	3,503	5,209
90°x10°	3,115	6,252
W (120°)	2,694	950

Asymmetric		
NAS	3,763	22,970
WW	3,631	5,969
CAS	2,938	4,013

Based on MRGBWVP full output, white set to 3000K, 4ft [1218mm].
Photometric performance is measured externally in compliance with IESNA LM-79-24.
10x10, 10x30, 10x60, 10x90, 30x30, 30x60, 30x90, 60x60, 90x90, 30x10, 60x10, 60x30, 90x10, NAS and CAS optics tested with CL lens.
WWV optic tested with HFR lens.

Description

The Lumenfacade Max made history as the first linear fixture to feature Opticolor™, Lumenpulse's groundbreaking mixed-at-source technology. Today, it continues to lead the way with Opticolor+™, delivering even greater colour precision, flexibility, and performance. Powered by Optidrive™, Lumenfacade Max ensures maximum output, maximum consistency, and the unmistakable brilliance that defines Lumenpulse innovation.

Features

Length (Nominal)	12: 303 mm, 24: 608 mm, 36: 913 mm, 48: 1218 mm
Colours and Colour Temperature (Opticolor™)	MRGB: Opticolor Cluster with MRGB (Red, Green, Blue) MRGBA: Opticolor Cluster with MRGBA (Red, Green, Blue, PC Amber)
Colours and Colour Temperature (Opticolor+™)	MRGBWP: MRGBWP With Opticolor+™ (Red, Green, Blue and Configurable White 2700-6500K) MRGBWP Typical Colour Rendering: 2700K-5000K: 90+ CRI 5000K-6500K: 85+ CRI
Vibration Rating	NVR: Buildings and Fixed Structures VRN: Pole-Mounts VRBO: Bridges and Overpasses
Fixed Mounting Options	FX: Fixed Mounting (0° Pivot Limit)

Résumé photométrique (72.18 W/m, Opticolor, MRGBA)

Symmetric


	Delivered Output (lm)	Intensity (Peak cd)
10°x10°	3,480	46,417
10°x30°	3,289	17,082
10°x60°	3,310	10,494
10°x90°	3,311	7,156
30°x30°	3,248	7,682
30°x60°	3,223	4,204
30°x90°	2,927	2,983
60°x60°	3,184	2,622
90°x90°	3,113	1,802
30°x10°	3,114	15,341
60°x10°	3,198	9,699
60°x30°	3,191	4,745
90°x10°	2,838	5,695
W (120°)	2,454	865

Asymmetric

NAS	3,428	20,923
WW	3,307	5,437
CAS	2,676	3,656

Based on MRGBA full output, 4ft [1218mm].
Photometric performance is measured externally in compliance with IESNA LM-79-24.
10x10, 10x30, 10x60, 10x90, 30x30, 30x60, 30x90, 60x60, 90x90, 30x10, 60x10, 60x30, 90x10, NAS and CAS optics tested with CL lens.
WW optic tested with HFR lens.

Optic

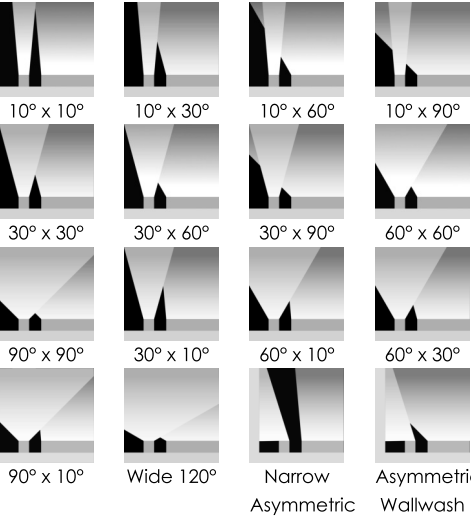

Ceiling
Asymmetric

Colour and Colour Temperature



Continuously Adjustable Mounting Options

SM: Slim Adjustable Mounting Continuously Adjustable (110° Pivot Limit)

WMC3: Wall Mounting Continuously Adjustable, 89 mm to Optical Centre (130° Pivot Limit)

WMC12: Wall Mounting Continuously Adjustable, 305 mm to Optical Centre (180° Pivot Limit)

WMC24: Wall Mounting Continuously Adjustable, 610 mm to Optical Centre (180° Pivot Limit)

WMC1: Wall Mounting Continuously Adjustable, 38 mm to Optical Centre (180° Pivot Limit)

WMC6: Wall Mounting Continuously Adjustable, 152 mm to Optical Centre (170° Pivot Limit)

WMC18: Wall Mounting Continuously Adjustable, 457 mm to Optical Centre (180° Pivot Limit)

Incrementally Adjustable Mounting Options

WMI1: Wall Mounting Incrementally Adjustable by 6°, 38 mm to Optical Centre (180° Pivot Limit)

WMI6: Wall Mounting Incrementally Adjustable by 6°, 152 mm to Optical Centre (170° Pivot Limit)

WMI18: Wall Mounting Incrementally Adjustable by 6°, 457 mm to Optical Centre (180° Pivot Limit)

WMI3: Wall Mounting Incrementally Adjustable by 6°, 89 mm to Optical Centre (130° Pivot Limit)

WMI12: Wall Mounting Incrementally Adjustable by 6°, 305 mm to Optical Centre (180° Pivot Limit)

WMI24: Wall Mounting Incrementally Adjustable by 6°, 610 mm to Optical Centre (180° Pivot Limit)

Optical Accessories

LV: Radial Louver
LVAS: Radial Louver Asymmetric
VS: Visor
SH: Shield

Warranty

5-year limited warranty

Performance

Maximum Delivered Output (Opticolor)

1,012 lm
(19.68 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM)
1,790 lm
(32.8 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM)
3,480 lm
(72.18 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM)
Refer to Photometric Guide on Lumenpulse website for information on other colour temperatures.

Maximum Delivered Output (Opticolor+)

1,145 lm
(19.68 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM)
1,917 lm
(32.8 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM)
3,821 lm
(72.18 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM)
Refer to Photometric Guide on Lumenpulse website for information on other colour temperatures.

Control



Finish



Certifications



Maximum Delivered Intensity (Opticolor)	13,499 cd at nadir (19.68 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL Lens, DMX/RDM) 23,874 cd at nadir (32.8 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM) 46,417 cd at nadir (72.18 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM) Refer to Photometric Guide on Lumenpulse website for information on other colour temperatures.
Maximum Delivered Intensity (Opticolor+)	15,271 cd (19.68 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM) 25,575 cd (32.8 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM) 50,958 cd (72.18 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM) Refer to Photometric Guide on Lumenpulse website for information on other colour temperatures.
Illuminance at Distance (Opticolor)	Minimum 1 lx at 116 m (19.68 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM) Minimum 1 lx at 155 m (32.8 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM) Minimum 1 lx at 215 m (72.18 W/m, 1218 mm fixture, MRGBA, 10° x 10°, CL lens, DMX/RDM) Refer to Photometric Guide on Lumenpulse website for information on other colour temperatures.
Illuminance at Distance (Opticolor+)	Minimum 1 lx at 124 m (19.68 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM) Minimum 1 lx at 160 m (32.8 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM) Minimum 1 lx at 226 m (72.18 W/m, 1218 mm fixture, MRGBWP, 10° x 10°, CL lens, DMX/RDM) Refer to Photometric Guide on Lumenpulse website for information on other colour temperatures.
Lumen Maintenance	L70 (15K) > 90,000 hrs Ta 25 °C (TM-21 reported) L70 > 150,000 hrs Ta 25 °C (projected)* L90 (15K) = 55,400 hrs Ta 25 °C (TM-21 reported) L90 = 55,400 hrs Ta 25 °C (projected)* *Estimated based on in-situ case temperature and LM-80 report
Physical	
Housing Material	Low copper content extruded aluminium
Lens Material	Tempered glass
Hardware Material	Stainless steel
End Cap Material	Die cast aluminium
Gasket Material	Silicone

Surface Finish	XD: Luminaire treated with extra-durable, multi-step finish: zirconium pretreatment completed with corrosion-resistant primer and electrostatically-applied, powder coat paint finish
Weight	2.04 kg (303 mm fixture) 3.4 kg (608 mm fixture) 5.22 kg (913 mm fixture) 6.58 kg (1218 mm fixture)

Electrical and Control

Voltage	220 to 240 volts (CE certification, Class I) 100 to 200 volts (PSE Certification) Note: For 208V, 220V, 240V, and 277V systems, the voltage drop must not fall below 195V. For 200V system with PSE Certification, the voltage drop must not fall below 160V.
Wattage	6W: 19.68 W/m, 10W: 32.8 W/m, 22W: 72.18 W/m
Control	DMX/RDM: DMX/RDM Enabled DALIT8: DALI 2 T8 Control LT: Lumentalk ETX: ExtendX™
Inrush Current (Peak)	Meets NEMA-410 requirements (Based on voltage and control specifications, consult factory for details)

Environmental

Storage Temperature	-40 °C to 85 °C
Start-up Temperature	-40 °C to 50 °C
Operating Temperature	For 19.68 W/m fixtures: -40 °C to 50 °C For 32.8 W/m fixtures: -40 °C to 50 °C For 72.18 W/m fixtures, CE Certification: -40 °C to 40 °C
Ingress Protection Rating	IP66 IP67 (suitable for applications with temporary immersion in water only (no permanent immersion), proper drainage around the fixture is required). Consult factory for details
Impact Resistance Rating	IK07 (CL lens), IK07 (HFR lens), IK06 (FR lens) Consult factory for IK08 lens option

Accessories (Order Separately)

Cables	LFLC: Lumenfacade Leader Cable LFJC: Lumenfacade Jumper Cable LFTJ: Lumenfacade T-Junction
--------	---

Photometric Information

19.68 W/m (MRGBWP)

Symmetric

	Delivered Output (lm)	Intensity (Peak cd)
10°x10°	1,145	15,271
10°x30°	1,082	5,620
10°x60°	1,089	3,452
10°x90°	1,089	2,354
30°x30°	1,069	2,527
30°x60°	1,060	1,383
30°x90°	963	981
60°x60°	1,048	862
90°x90°	1,024	593
30°x10°	1,024	5,047
60°x10°	1,052	3,191
60°x30°	1,050	1,561
90°x10°	934	1,874
W (120°)	807	285

Asymmetric

NAS	1,128	6,884
WW	1,088	1,789
CAS	880	1,203

Based on MRGBWP full output, white set to 3000K, 1218 mm.

32.8 W/m (MRGBWP)

Symmetric

	Delivered Output (lm)	Intensity (Peak cd)
10°x10°	1,917	25,575
10°x30°	1,812	9,412
10°x60°	1,824	5,782
10°x90°	1,824	3,943
30°x30°	1,790	4,232
30°x60°	1,776	2,316
30°x90°	1,612	1,644
60°x60°	1,754	1,444
90°x90°	1,715	993
30°x10°	1,716	8,453
60°x10°	1,762	5,344
60°x30°	1,758	2,614
90°x10°	1,564	3,138
W (120°)	1,352	477

Asymmetric

NAS	1889	11,529
WW	1822	2,996
CAS	1475	2,014

Based on MRGBWP full output, white set to 3000K, 1218 mm.

72.18 W/m (MRGBWP)

Symmetric

	Delivered Output (lm)	Intensity (Peak cd)
10°x10°	3,821	50,958
10°x30°	3,610	18,753
10°x60°	3,634	11,521
10°x90°	3,634	7,856
30°x30°	3,566	8,433
30°x60°	3,538	4,615
30°x90°	3,213	3,275
60°x60°	3,496	2,878
90°x90°	3,417	1,978
30°x10°	3,418	16,842
60°x10°	3,511	10,648
60°x30°	3,503	5,209
90°x10°	3,115	6,252
W (120°)	2,694	950

Asymmetric


NAS	3,763	22,970
WW	3,631	5,969
CAS	2,938	4,013

Based on MRGBWP full output, white set to 3000K, 1218 mm.

Photometric performance is measured externally in compliance with IESNA LM-79-24.
10x10, 10x30, 10x60, 10x90, 30x30, 30x60, 30x90, 60x60, 90x90, 30x10, 60x10, 60x30, 90x10, W, NAS and CAS optics tested with CL lens. WW optic tested with HFR lens.
Refer to Photometric Guide on Lumenpulse website for information on other colour temperatures.

Colour Point Information

MRGBWP

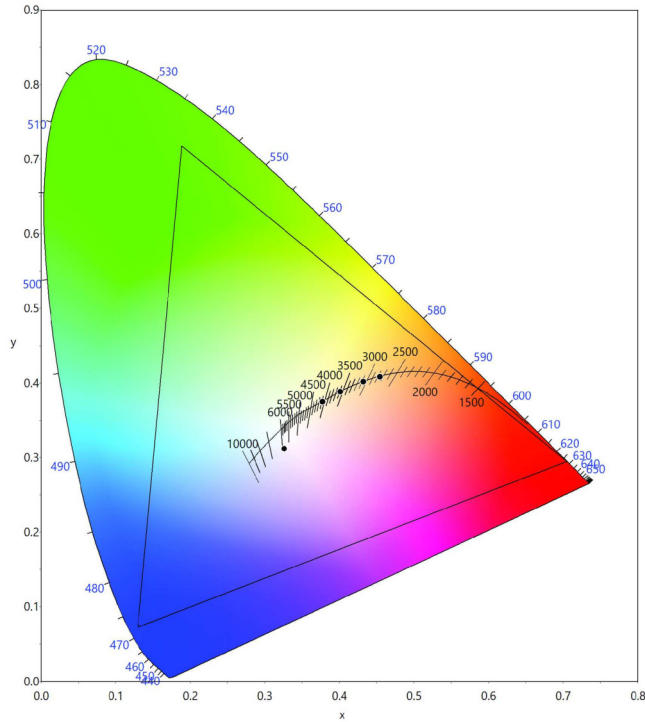


Dominant Wavelength and Chromaticity

	Dominant Wavelength	Chromaticity	
		Cx	Cy
Red	~628nm	0.7050	0.2949
Green	~531nm	0.1885	0.7178
Blue	~471nm	0.1298	0.0726
Amber	~591nm	0.5755	0.4126

	Cx	Cy
MRGBWP Full On	0.3261	0.3121
27K Optidrive	0.4545	0.4081
30K Optidrive	0.4318	0.4017
35K Optidrive	0.4010	0.3883
40K Optidrive	0.3773	0.3747

Values measured from Steady State Full on Optidrive @ 25°C ambient conditions.


Mounting Bracket Placement (Minimum and Maximum Distances)

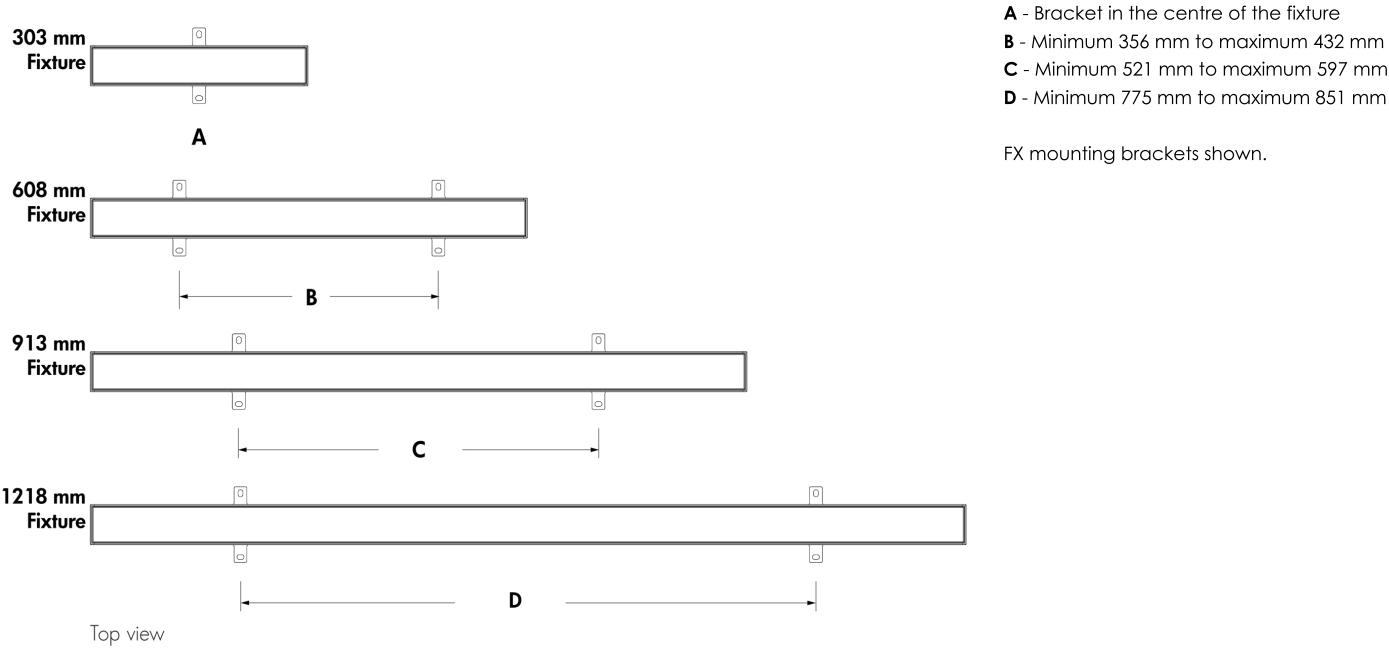


The mounting bracket(s) must be centred on fixture and as symmetrical as possible. Distances must be respected for all installations.

Mounting Options

FX - Fixed Mounting



FX - Mounting Hole Pattern




One mounting bracket provided for 303 mm fixtures. Two mounting brackets provided for 608 mm, 913 mm and 1218 mm fixtures.

Weight of one FX Mounting Bracket: 0.05 kg. Weight of two FX Mounting Brackets: 0.1 kg.

For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.

SM - Slim Adjustable Mounting



Not suitable when fixture is exposed to wind.


One mounting bracket provided for 303 mm fixtures. Two mounting brackets provided for 608 mm, 913 mm and 1218 mm fixtures.

Weight of one SM Mounting Bracket: 0.12 kg. Weight of two SM Mounting Brackets: 0.24 kg.


Not suitable for pole-mounted or bridge and overpass applications.

For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.

SM - Mounting Hole Pattern




WMC1 - Wall Mounting Continuously Adjustable, 38 mm to Optical Centre
Wmi1 - Wall Mounting Incrementally Adjustable By 6°, 38 mm to Optical Centre

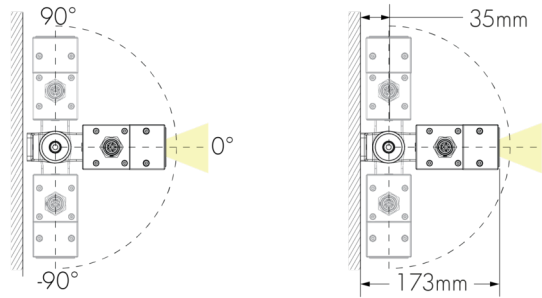


Weight of one WMC1/Wmi1 Mounting Bracket: 0.28 kg.
Weight of two WMC1/Wmi1 Mounting Brackets: 0.56 kg.

WMC1 Wmi1 - Mounting Hole Pattern

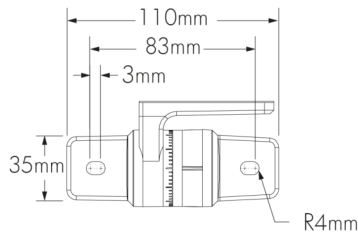


WMC3 - Wall Mounting Continuously Adjustable, 89 mm to Optical Centre
Wmi3 - Wall Mounting Incrementally Adjustable by 6°, 89 mm to Optical Centre

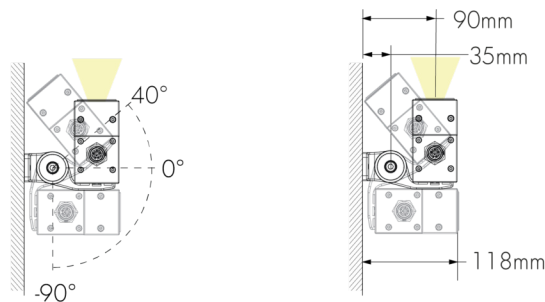


Weight of one WMC3/Wmi3 Mounting Bracket: 0.28 kg.
Weight of two WMC3/Wmi3 Mounting Brackets: 0.56 kg.

WMC3 Wmi3 - Mounting Hole Pattern

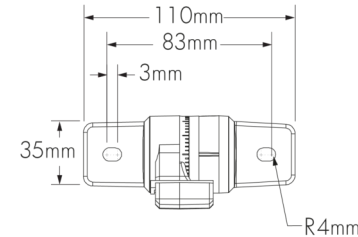


For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.

WMC6 - Wall Mounting Continuously Adjustable, 152 mm to Optical Centre
WMI6 - Wall Mounting Incrementally Adjustable by 6°, 152 mm to Optical Centre

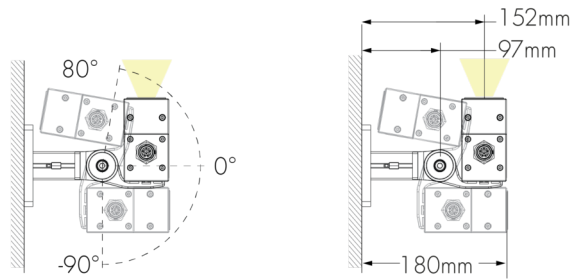


Weight of one WMC6/WMI6 Mounting Bracket: 0.55 kg.
Weight of two WMC6/WMI6 Mounting Brackets: 1.1 kg.

WMC12 - Wall Mounting Continuously Adjustable, 305 mm to Optical Centre
WMI12 - Wall Mounting Incrementally Adjustable by 6°, 305 mm to Optical Centre

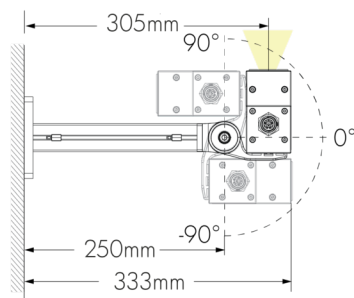

Weight of one WMC12/WMI12 Mounting Bracket: 0.78 kg.
Weight of two WMC12/WMI12 Mounting Brackets: 1.56 kg.


WMC18 - Wall Mounting Continuously Adjustable, 457 mm to Optical Centre
WMI18 - Wall Mounting Incrementally Adjustable by 6°, 457 mm to Optical Centre

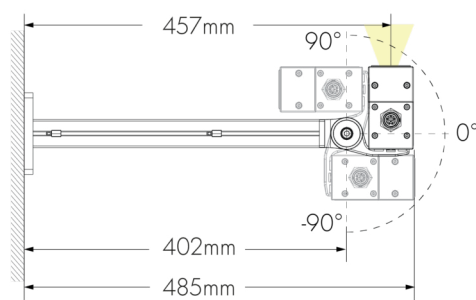


Weight of one WMC18/WMI18 Mounting Bracket: 1.05 kg.
Weight of two WMC18/WMI18 Mounting Brackets: 2.1 kg.

For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.


WMC6 WMI6 - Mounting Hole Pattern




WMC12 WMI12 - Mounting Hole Pattern



WMC18 WMI18 - Mounting Hole Pattern



WMC24 - Wall Mounting Continuously Adjustable, 610 mm to Optical Centre
WMI24 - Wall Mounting Incrementally Adjustable by 6°, 610 mm to Optical Centre

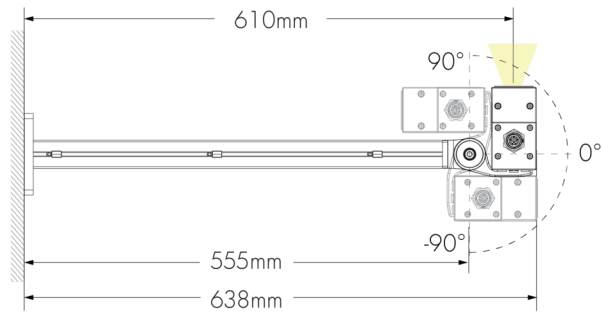


Weight of one WMC24/WMI24 Mounting Bracket: 1.3 kg.
Weight of two WMC24/WMI24 Mounting Brackets: 2.6 kg.

One mounting bracket provided for 303 mm fixtures. Two mounting brackets provided for 608 mm, 913 mm and 1218 mm fixtures.

For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.

Cable Management System For Wall Mounting Brackets

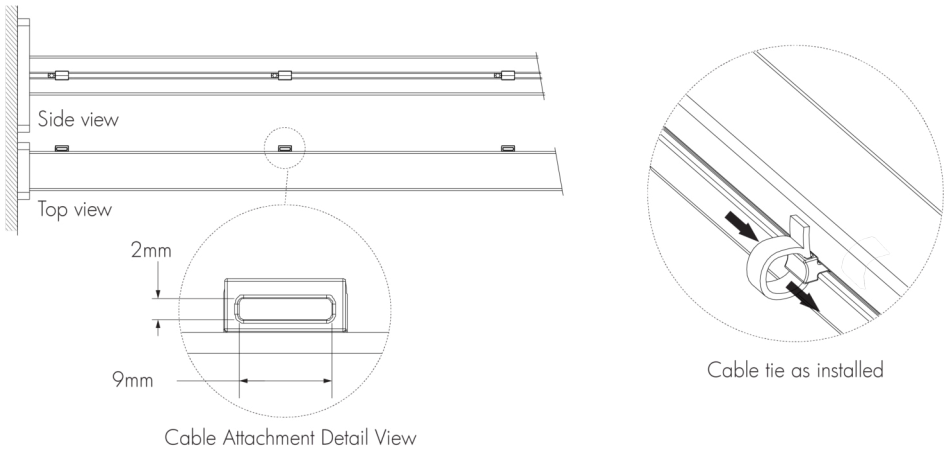


- 1 cable attachment provided for WMC6 and WMI6 mounting arms.
- 2 cable attachments provided for WMC12, WMI12, WMC18 and WMI18 mounting arms.
- 3 cable attachments provided for WMC24 and WMI24 mounting arms.

Maximum cable tie size: 9 mm width, 2 mm thickness.
Cable ties for outdoor applications are recommended, provided by others.

Accessories


LV - Radial Louvre

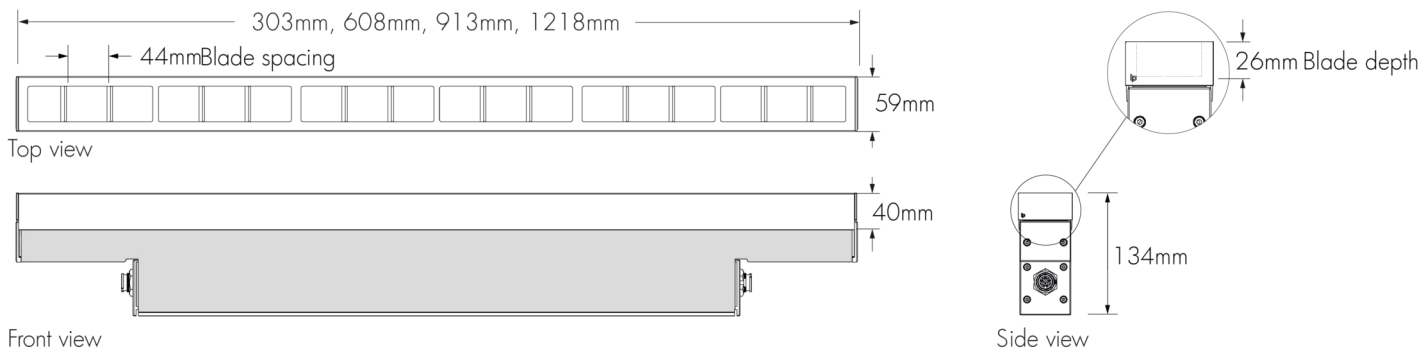

- A Radial Louvre will affect beam distribution. Consult factory for application support.
- The Radial Louvre is field installable. The Radial Louvre can be combined with the Shield accessory; all other combinations are not possible.
- The exterior finish of the accessory will match the finish specified in the fixture order code (interior surface painted matte black).
- Not suitable for NAS, CAS and WW optics.
- Consult EPA Guide in the specification sheet for engineering calculations.

Weight of 303 mm accessory: 0.29 kg, and 608 mm accessory: 0.57 kg, weight of 913 mm accessory: 0.79 kg, weight of 1218 mm accessory: 1.04 kg.
Note: the weight of the accessory is in addition to the weight of the fixture.


LVAS - Radial Louvre Asymmetric

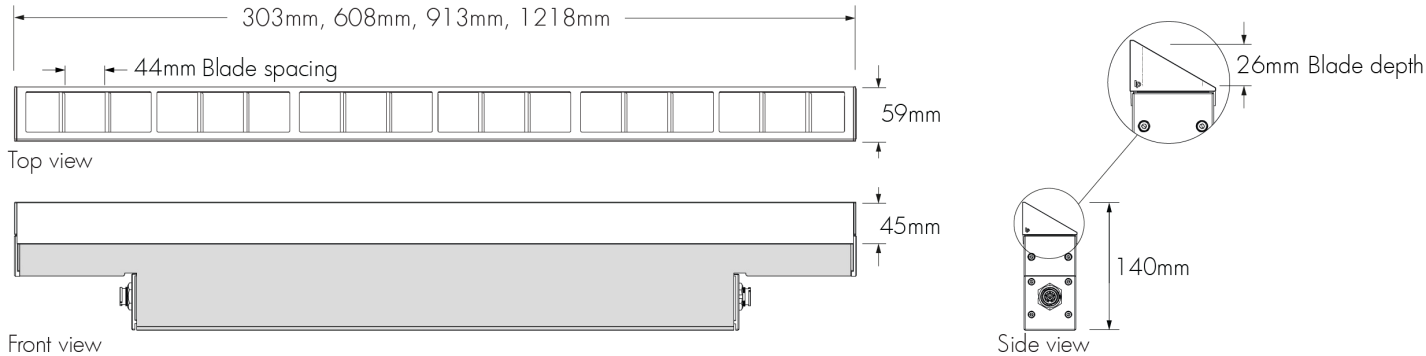

- A Radial Louvre Asymmetric will affect beam distribution. Consult factory for application support.
- The Radial Louvre Asymmetric is field installable. The Radial Louvre Asymmetric can be combined with the Shield accessory; all other combinations are not possible.
- The exterior finish of the accessory will match the finish specified in the fixture order code (interior surface painted matte black).
- Consult EPA Guide in the specification sheet for engineering calculations.

Weight of 303 mm accessory: 0.23 kg, weight of 608 mm accessory: 0.45 kg, weight of 913 mm accessory: 0.59 kg, weight of 1218 mm accessory: 0.77 kg.
Note: the weight of the accessory is in addition to the weight of the fixture.


VS - Visor

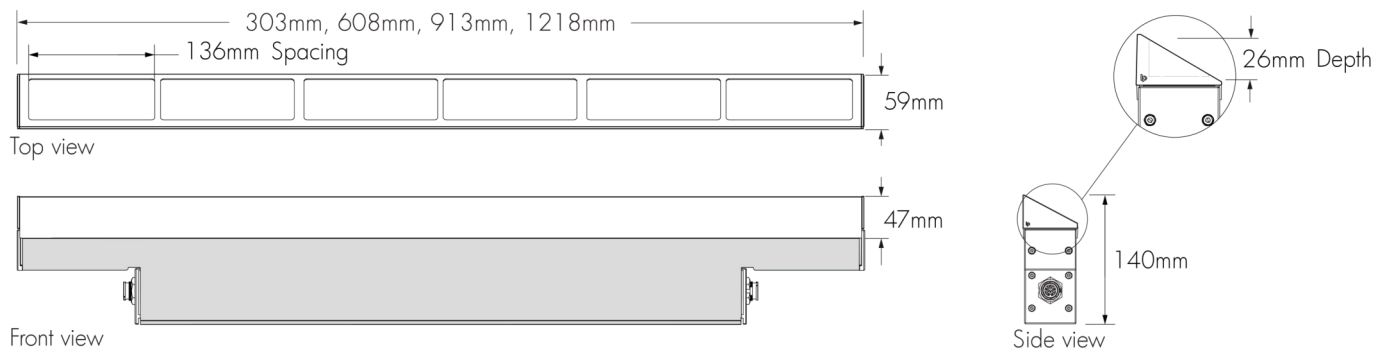

- A Visor will affect beam distribution. Consult factory for application support.
- The Visor is field installable. The Visor can be combined with the Shield accessory; all other combinations are not possible.
- The exterior finish of the accessory will match the finish specified in the fixture order code with the exception of the inside surface of the Visor end caps, which are painted the same colour as the fixture. Interior surface painted matte black.
- Consult EPA Guide in the specification sheet for engineering calculations.

Weight of 303 mm accessory: 0.18 kg, weight of 608 mm accessory: 0.36 kg, weight of 913 mm accessory: 0.54 kg, weight of 1218 mm accessory: 0.68 kg.
 Note: the weight of the accessory is in addition to the weight of the fixture.

SH - Shield

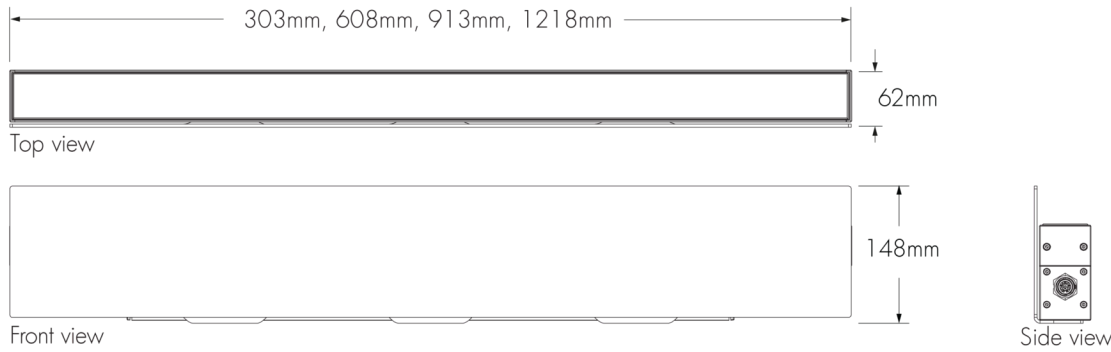

- A Shield will affect beam distribution. Consult factory for application support.
- The Shield is field installable. The Shield can be combined with the Louver, Louver Asymmetric or Visor accessories.
- No vibration rating available. The Shield can be installed in zones with wind speeds up to 193 km/h. Consult factory for zones with wind speeds higher than 193 km/h.
- The exterior finish of the accessory will match the finish specified in the fixture order code (interior surface painted matte black).
- Consult EPA Guide in the specification sheet for engineering calculations.

Weight of 303 mm accessory: 1.13 kg, weight of 608 mm accessory: 2.15 kg, weight of 913 mm accessory: 3.29 kg, weight of 1218 mm accessory: 4.31 kg.
 Note: the weight of the accessory is in addition to the weight of the fixture.


Lens and Optics Combinations Table

Lens/Optics	10x10	10x30	10x60	10x90	30x30	30x60	30x90	60x60	90x90	30x10	60x10	60x30	90x10	W	NAS	WW	CAS
CL Clear Lens	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓
HFR Half-Frosted Lens	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗
FR Frosted Lens	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

- ✓ Lens option
- ✗ Not available


Half-Frosted Lens Details

Left Feeding Side

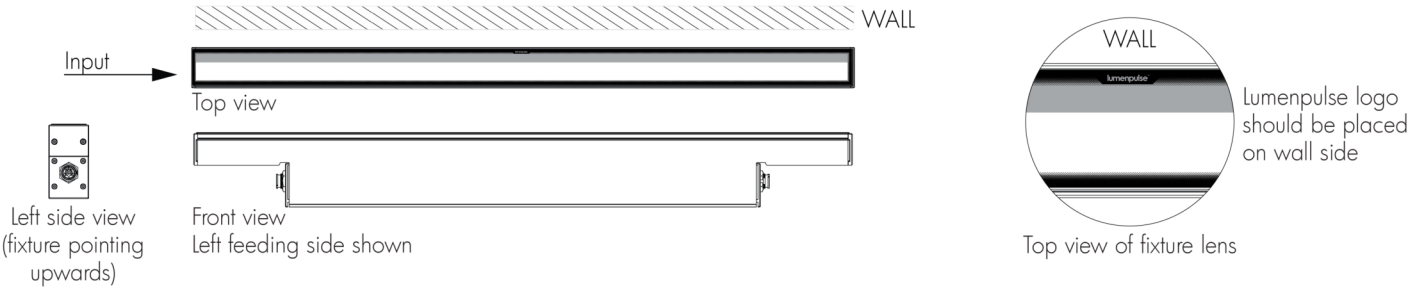


- Position frosted side of the lens and Lumenpulse logo along the wall.
- Fixture's feeding side is based on upright installations. Feeding sides are reversed when fixture is used in a downlight application.

Right Feeding Side

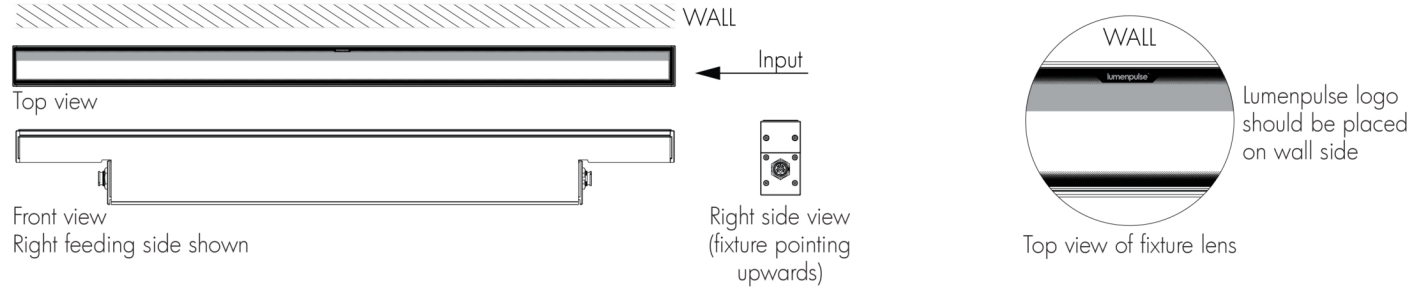


- Position frosted side of the lens and Lumenpulse logo along the wall.
- Fixture's feeding side is based on upright installations. Feeding sides are reversed when fixture is used in a downlight application.

Ceiling Asymmetric Optic Details

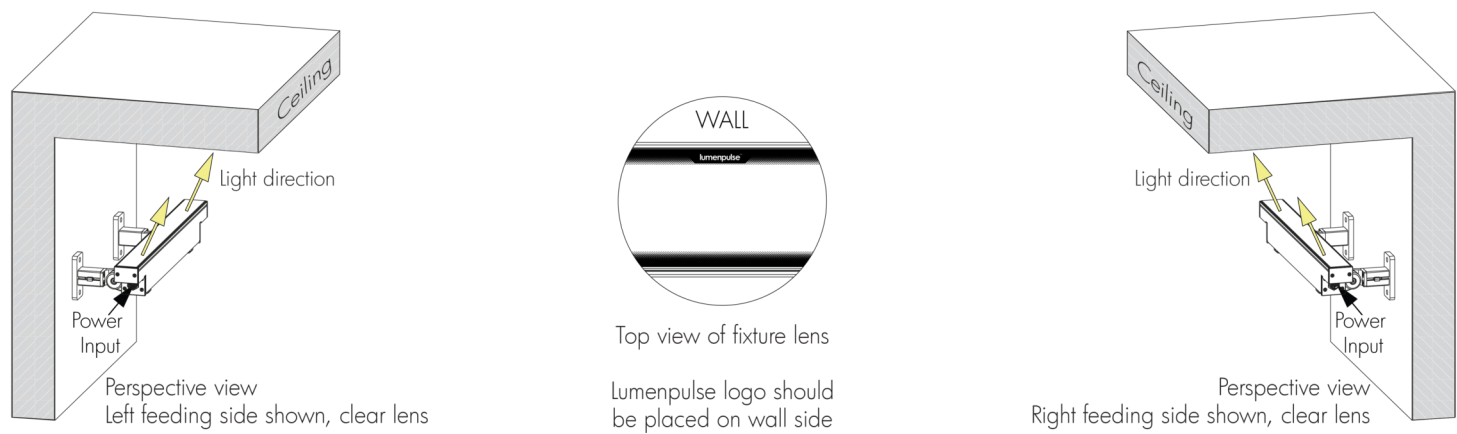

- Always position Lumenpulse logo on lens along the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.
- **Ceiling Asymmetric optic guidelines:** 457 mm minimum setback, 1:5 setback/canopy depth ratio (based on CL lens).

Narrow Asymmetric and Asymmetric Wallwash Optics Details

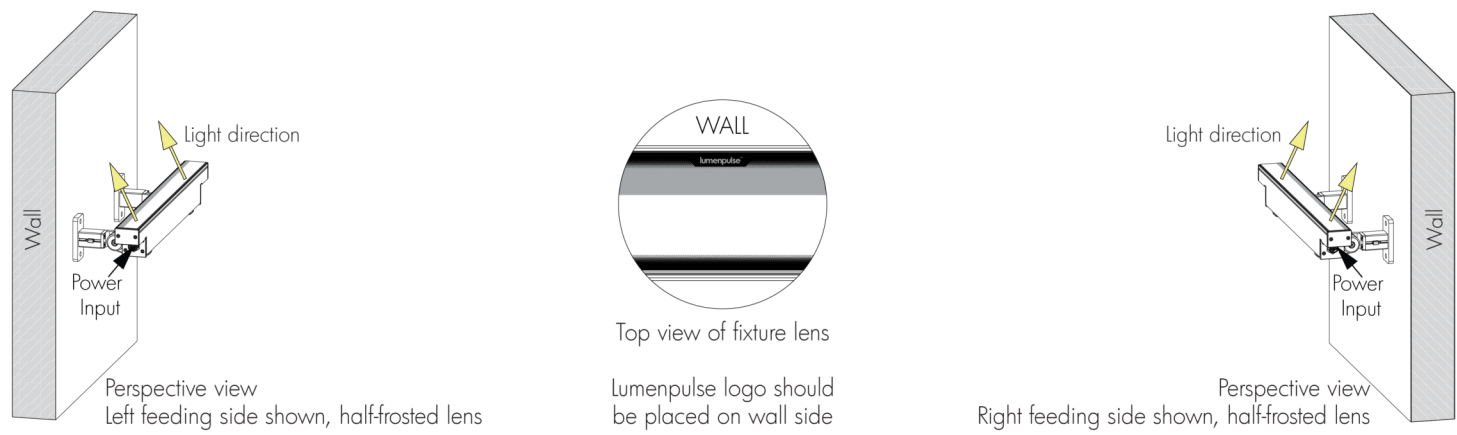


- Position frosted side of the lens and Lumenpulse logo along the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.
- **Narrow Asymmetric optic guidelines:** 305 mm minimum setback, 1:10 setback ratio (based on HFR lens).
- **Asymmetric Wallwash optic guidelines:** 152 mm minimum setback, 1:8 setback ratio (based on HFR lens).

EPA Guide - Fixture

Fixture	303 mm	608 mm	913 mm	1218 mm
EPA Top (m²) 	0.022	0.044	0.066	0.089
EPA Front (m²) 	0.031	0.073	0.104	0.146
EPA Side (m²) 	0.008	0.008	0.008	0.008

EPA Guide - Fixture with Accessory



Fixture With Radial Louvre Accessory

	303 mm	608 mm	913 mm	1218 mm
EPA Top (m²) 	0.022	0.044	0.066	0.089
EPA Front (m²) 	0.043	0.096	0.140	0.193
EPA Side (m²) 	0.009	0.009	0.009	0.009


Fixture With Radial Louvre Asymmetric Accessory

	303 mm	608 mm	913 mm	1218 mm
EPA Top (m²) 	0.022	0.044	0.066	0.089
EPA Front (m²) 	0.044	0.098	0.143	0.197
EPA Side (m²) 	0.009	0.009	0.009	0.009




Fixture With Visor Accessory

	303 mm	608 mm	913 mm	1218 mm
EPA Top (m²) 	0.022	0.044	0.066	0.089
EPA Front (m²) 	0.044	0.098	0.143	0.197
EPA Side (m²) 	0.009	0.009	0.009	0.009

Fixture With Shield Accessory


	303 mm	608 mm	913 mm	1218 mm
EPA Top (m²) 	0.022	0.044	0.066	0.089
EPA Front (m²) 	0.086	0.173	0.259	0.346
EPA Side (m²) 	0.008	0.008	0.008	0.008

EPA Guide - Mounting Option


	EPA Top/Side (m²)	
FX	N/A	
SM	0.001	
WMC1 WMi1	0.004	
WMC3 WMi3	0.004	
WMC6 WMi6	0.006	
WMC12 WMi12	0.013	
WMC18 WMi18	0.020	
WMC24 WMi24	0.027	

Resolution Details

DMX/RDM Control, Resolution Per Segment: Each 305 mm Segment is Addressed Independently
DMX Addresses:

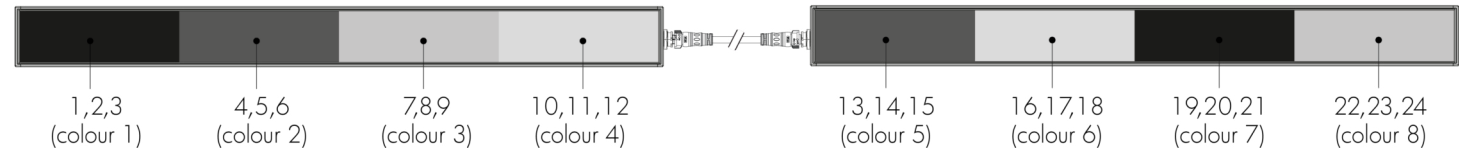


MRGB colour mixing option

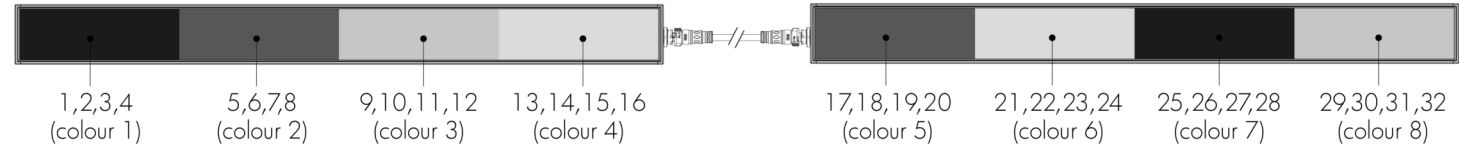


MRGBA, MRGBWP colour mixing options

DMX/RDM Control, Resolution Per Fixture: Each Fixture is Addressed Independently
DMX Addresses:

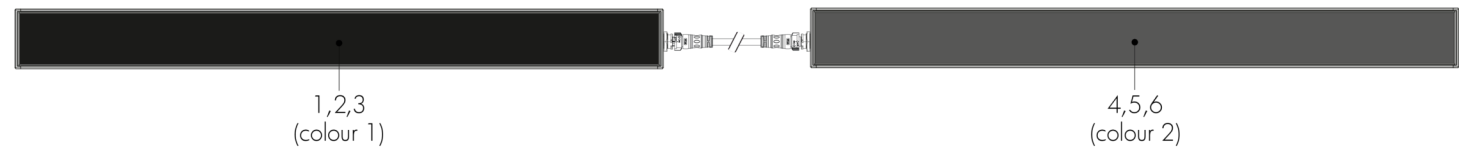

MRGB colour mixing option

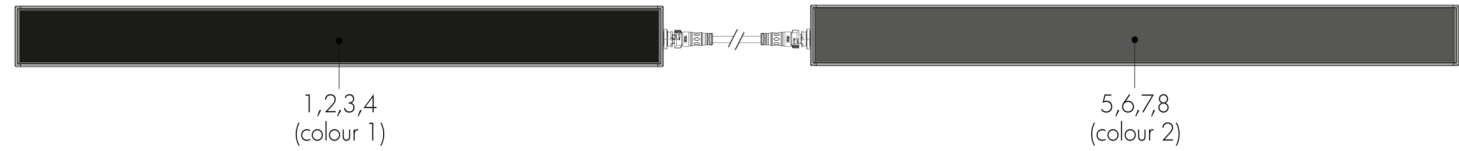

MRGBA, MRGBWP colour mixing options

- 1219 mm fixtures shown.
- Applicable for DMX/RDM control option only. Fixture resolution can be configured on-site within the LumenID V3 software. A DMX/RDM enabled CBX is required.

Wiring Colour Code

DALIT8 and LT Control (XC3P2D)

CE Color Code	Use
Green/yellow	Ground
Brown	line
Blue	Neutral
Black	1-10V + / Data +
Grey	1-10V - / Data -

DMX/RDM and ExtendX Controls (XC3P3D)

CE Color Code	Use
Blue	Neutral
Green/yellow	Ground
Brown	line
Gray	Signal Common
Purple	Data +
Orange	Data -

Maximum Fixture Run Length Table

DMX/RDM Control (DMX/RDM)

Lumenfacade Max 19.68W/m

Voltage	Resolution	100V	220V	240V
Maximum Fixture Run Length	Per 0.3m	39m	39m	39m

Lumenfacade Max 32.8W/m

Voltage	Resolution	100V	220V	240V
Maximum Fixture Run Length	Per 0.3m	35m	39m	39m

Lumenfacade Max 72.18W/m

Voltage	Resolution	100V	220V	240V
Maximum Fixture Run Length	Per 0.3m	17m	38m	39m

Based 1218 mm fixtures, per foot resolution, DMX/RDM control, 3 m Leader Cable for an end-to-end run with 0.3 m Jumper Cables between fixtures. Refer to Typical Wiring Diagrams for Control Protocol specific run length rules.

ExtendX Control (ETX)

Lumenfacade Max 19.68W/m

Voltage	Resolution	220V	240V
Maximum Fixture Run Length	Per 0.3m	129m	141m

Lumenfacade Max 32.8W/m

Voltage	Resolution	220V	240V
Maximum Fixture Run Length	Per 0.3m	80m	88m


Lumenfacade Max 72.18W/m

Voltage	Resolution	220V	240V
Maximum Fixture Run Length	Per 0.3m	38m	41m

Based 1218 mm fixtures, ETX control, per foot resolution, 3 m Leader Cable for an end-to-end run with 0.3 m Jumper Cables between fixtures. Refer to Typical Wiring Diagrams for Control Protocol specific run length rules.


Typical Wiring Diagrams

Star Layout (DMX/RDM)

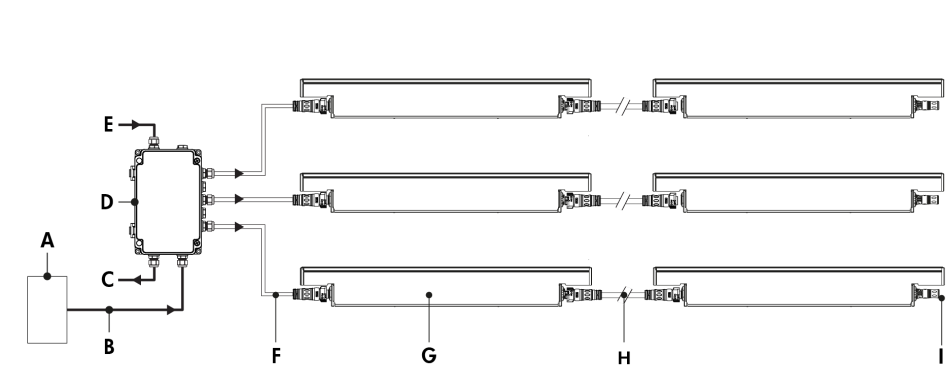

- A - Third-party DMX/RDM controller
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (220 to 240V, wiring by others)
- F - Leader Cable (LFLC XC3P3D)
- G - Lumenfacade Max Continuous Run (LFM-CR)
- H - Jumper Cable (LFJC XC3P3D)
- I - DMX/RDM Terminator

Daisy Chain Layout (DMX/RDM)

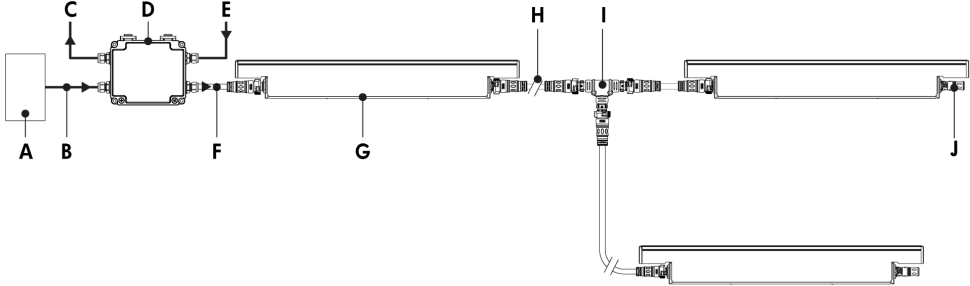


- A - Third-party DMX/RDM controller
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (220 to 240V, wiring by others)
- F - Leader Cable (LFLC XC3P3D)
- G - Lumenfacade Max Continuous Run (LFM-CR)
- H - Jumper Cable (LFJC XC3P3D)
- I - Lumenfacade T-Junction (LFTJ XC3P3D, optional)
- J - DMX/RDM Terminator

Refer to installation instructions for additional wiring details.


- Consult CBX installation instructions for additional wiring details.
- 15.2 m maximum DMX/RDM "Stub" length.
- Maximum of 1 luminaire per "Stub".
- 1 DMX universe = 128 @ 4-channel controllable segments.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST; maximum of 1 output per CBX-DS.
- Maximum of 64 DMX/RDM enabled fixtures per CBX output.
- Maximum DMX/RDM cable length of 243.8 m ("Bus" and "Stubs").

Star Layout (ExtendX)

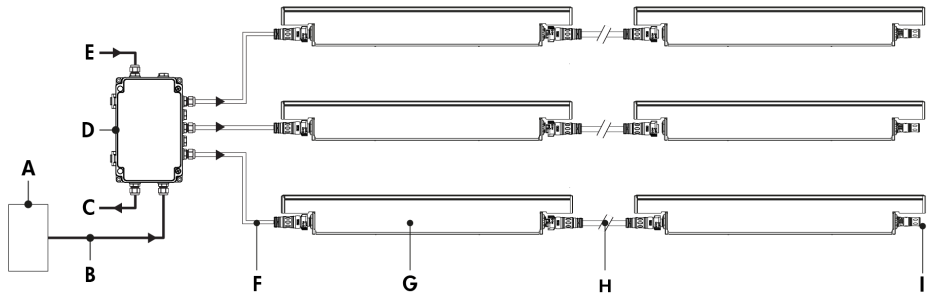

- A - Third-party sACN/ArtNet controller
- B - Data input (Cat5e or better, by others)
- C - Optional Ethernet connection to next CBX
- D - CBX-ST-ETX
- E - Power input (220 to 240V, wiring by others)
- F - Leader Cable (LFLC XC3P3D)
- G - Lumenfacade Max Continuous Run (LFM-CR)
- H - Jumper Cable (LFJC XC3P3D)
- I - DMX/RDM Terminator

Daisy Chain Layout (ExtendX)

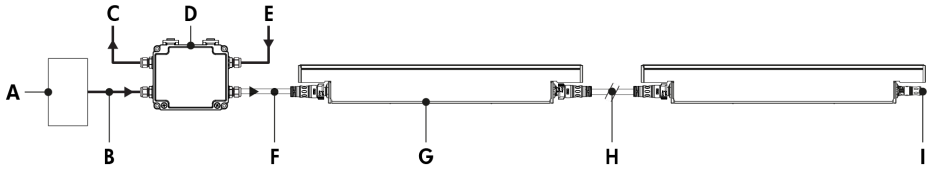

- A - Third-party sACN/ArtNet controller
- B - Data input (Cat5e or better, by others)
- C - Optional Ethernet connection to next CBX
- D - CBX-DS-ETX
- E - Power input (220 to 240V, wiring by others)
- F - Leader Cable (LFLC XC3P3D)
- G - Lumenfacade Max Continuous Run (LFM-CR)
- H - Jumper Cable (LFJC XC3P3D)
- I - DMX/RDM Terminator


Refer to installation instructions for additional wiring details.

Maximum of 4 outputs per CBX-ST ENET; maximum of 1 output per CBX-DS ENET.

Consult CBX installation instructions for additional wiring details.

Lumenfacade T-Junction accessory is not compatible with ExtendX Control.

DALI 2 T8 (DALIT8)

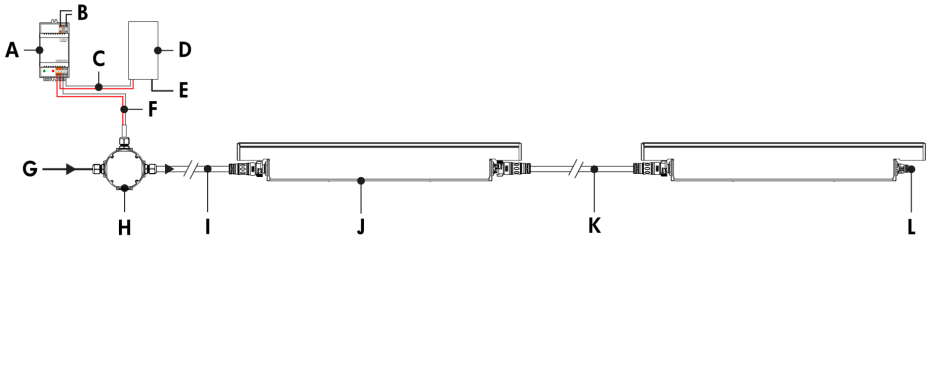


- A - DALI bus power supply (by others)
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (wiring by others)
- D - DALI controller (by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - Data output to fixture (wiring by others)
- G - Power input (220 to 240V, wiring by others)
- H - Junction box (by others)
- I - Leader Cable (LFLC XC3P2D)
- J - Lumenfacade Max Continuous Run (LFM-CR)
- K - Jumper Cable (LFJC XC3P2D)
- L - Sealing End Cap

Refer to installation instructions for additional wiring details and wiring diagram with Lumenfacade T-Junction accessory.

- 64 DALI addressable device limitation (each fixture is an addressable device).
- DALI does not allow for control by foot, only by fixture.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- Less than 1% minimum dimming value.

Lumentalk (LT)

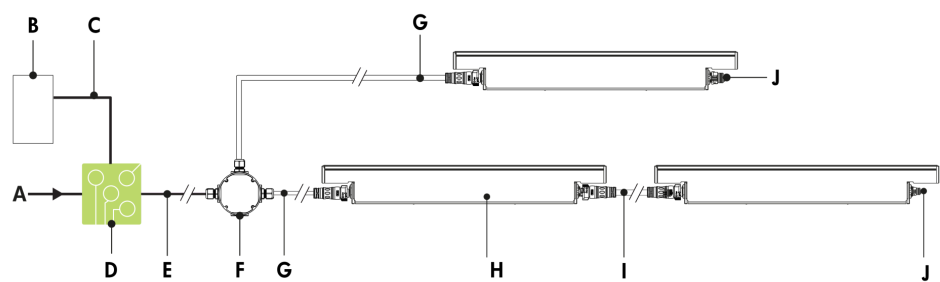


- A - Power input (220 to 240V, wiring by others)
- B - DMX/RDM controller (order separately from Lumenpulse, or by others)
- C - Data wiring (by others)
- D - Lumentranslator 2 (LTL2-DMX)
- E - Power wiring (by others)
- F - Junction box (by others)
- G - Leader cable (LFLC XC3P2D)
- H - Lumenfacade Max Continuous Run LFM-CR
- I - Jumper cable (LFJC XC3P2D)
- J - Sealing End Cap

Refer to installation instructions for additional wiring details and wiring diagram with Lumenfacade T-Junction accessory.


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colours is 1 minute). Consult factory for applications that require additional capabilities.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third-party fixtures allowed on the same circuit.
- Consult factory for DALI Lumentalk applications.

Leader Cable (Order Separately)

LFLC - Lumenfacade Leader Cable (XC3P2D)

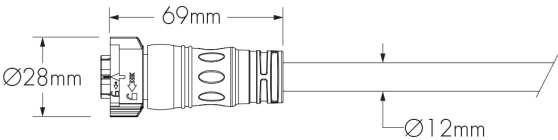

LFLC - Lumenfacade Leader Cable (XC3P3D)

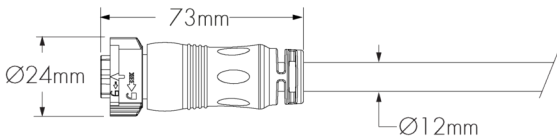

LFLC-TYPE-CERTIFICATION-VOLTAGE-LENGTH-CONNECTOR/CABLE TYPE-CONNECTOR SHAPE-CABLE/CONNECTOR COLOUR

Please specify:

DALIT8, LT applications:

TYPE: CR/CH (Continuous Run or Continuous Horizontal); **CERTIFICATION:** CE; **VOLTAGE:** 120_277; **LENGTH:** 3 m, 7.6 m, 15.2 m, 30.5 m, 30.5 m or 61 m; **CONNECTOR/CABLE TYPE:** XC3P2D (5x 16AWG X-lock size) or XC3P3D (3x14AWG + 3x24AWG X-lock C-size); **CONNECTOR SHAPE:** 180D (Straight Connector); **CABLE/CONNECTOR COLOUR:** BK (Black) (connectors are the same colour as the specified cable colour).

A waterproof sealing end cap is mandatory for any unused connector. One (1) included with every CR/CH XC3P2D Leader Cable.



DMX/RDM applications:

TYPE: CR/CH (Continuous Run or Continuous Horizontal); **CERTIFICATION:** CE; **VOLTAGE:** 120_277; **LENGTH:** 3 m, 7.6 m, 15.2 m, 30.5 m, 30.5 m or 61 m; **CONNECTOR/CABLE TYPE:** XC3P3D (3x14AWG + 3x24AWG X-lock C-size); **CONNECTOR SHAPE:** 180D (Straight Connector) or 90D (90° Angle Connector); **CABLE/CONNECTOR COLOUR:** BK (Black) (connectors are the same colour as the specified cable colour).

- Consult Lumenfacade Leader Cable specification sheet for additional information.

Jumper Cable (Order Separately)

LFJC - Lumenfacade Jumper Cable (XC3P2D)

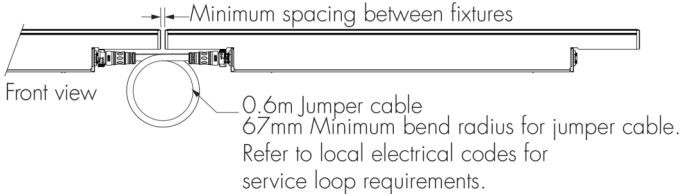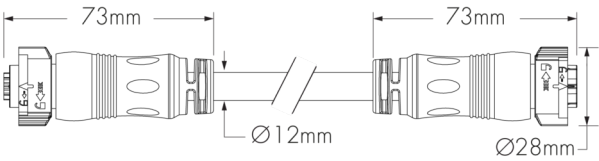


LFJC-CERTIFICATION-VOLTAGE-LENGTH-CONNECTOR/CABLE TYPE-CONNECTOR SHAPE-CABLE/CONNECTOR COLOUR


- Please specify:
- CERTIFICATION:** CE; **VOLTAGE:** 120_277; **LENGTH:** 0.3 m, 0.6 m, 1.5 m, 3 m, 7.6 m or 15.2 m; **CONNECTOR/CABLE TYPE:** XC3P2D (5x 16AWG X-lock size); **CONNECTOR SHAPE:** 180D (straight connector); **CABLE/CONNECTOR COLOUR:** BK (Black) (connectors are the same colour as the specified cable colour).
- Suitable for dimming/data and non-dimming applications.
 - Consult Lumenfacade Jumper Cable specification sheet for additional information.
 - For closely spaced fixtures, a minimum jumper cable length of 0.6 m is recommended to accommodate a cable loop between fixtures.
 - Minimum spacing for 913 mm and 1218 mm fixtures in a row: 9 mm.
 - Minimum spacing for 303 mm and 608 mm fixtures at the end of a fixture run, next to 913 mm and 1218 mm fixtures: 9 mm.
 - Minimum spacing for 303 mm and 608 mm fixtures in a row: 70 mm.
 - Minimum bend radius 67 mm.

T-Junction (Order Separately)

LFTJ - Lumenfacade T-Junction (XC3P2D)
Available For DALI8 and LT Control Options Only

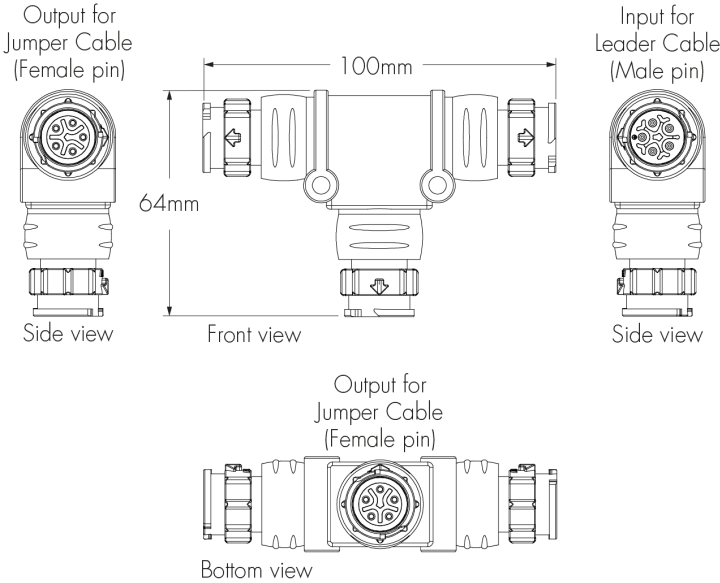

LFTJ - Lumenfacade T-Junction (XC3P3D)
Available for DMX/RDM Control Option Only

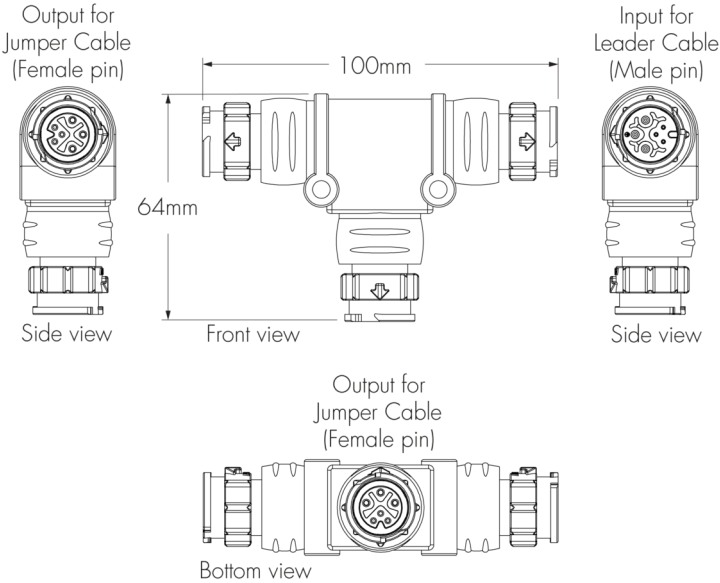


LFTJ-CONNECTOR/CABLE TYPE-CABLE/CONNECTOR COLOUR

- Please specify:
- CONNECTOR/CABLE TYPE:** XC3P2D (5x 16AWG X-lock size) or XC3P3D (3x 14AWG + 3x24AWG) X-lock size ; **CABLE/CONNECTOR COLOUR:** BK (Black).
- Suitable for dimming/data and non-dimming applications with LFM fixtures.
 - Consult factory for guidelines on the use of T-Junctions in a fixture run.
 - Consult Lumenfacade T-Junction specification sheet for additional information.
 - The T-Junction accessory can be used to connect a feed input, with a throughput to a localised run of fixtures and an output to the rest of your installation.
 - Waterproof sealing end cap is mandatory for any unused connector. One (1) included with every T-Junction accessory.
 - For DMX/RDM applications, an installation must not exceed 64 fixtures and 243.8 m of cable. Additionally, each stub must not exceed 15.2 m.

Lumenfacade T-Junction accessory is not compatible with ExtendX Control.

DMX/RDM Terminator (Included with Leader Cable)

148161 (Black) or 150394 (White) - DMX/RDM Terminator




DMX/RDM terminator is mandatory at the end of a fixture run with T-junction for DMX/RDM applications

Please specify:

148161: Black (BK) or 150394: White (WH)


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

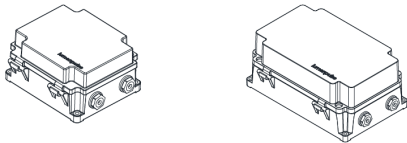

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

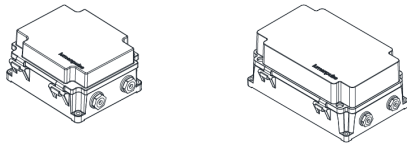

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

Lumenscene



The Lumenscene, a user-friendly DMX/RDM lighting controller that includes eight preconfigured scene changes and can be programmed via RDM.

PHAROS - Pharos® Kit

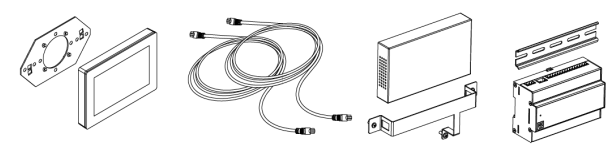

The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.

How to Order

Housing	Type	Certification	Voltage	Length	Wattage	Colour and Colour Temperature	Optic	Lens	Feeding Side
LFM Lumenfacade Max	CR Continuous Run	CE CE Compliant (Class I) PSE PSE Certification ⁽¹⁾ ⁽²⁾ ⁽³⁾	230 220 to 240 volts 100_200 100 to 200 volts (PSE Certification) ⁽⁴⁾	12 303 mm 24 608 mm 36 913 mm 48 1218 mm	6W 19.68 W/m ⁽⁵⁾ ⁽⁶⁾ 10W 32.8 W/m 22W 72.18 W/m	MRGB Opticolor with MRGB ⁽⁷⁾ MRGBA Opticolor with MRGB+ Phosphor Converted Amber (PC Amber) ⁽⁷⁾ MRGBWP MRGBW With Opticolor+™ ⁽⁷⁾ ⁽⁸⁾	10x10 10° x 10° ⁽⁹⁾ 10x30 10° x 30° 10x60 10° x 60° 10x90 10° x 90° 30x30 30° x 30° ⁽¹⁰⁾ 30x60 30° x 60° ⁽¹⁰⁾ 30x90 30° x 90° ⁽¹⁰⁾ 60x60 60° x 60° ⁽¹⁰⁾ 90x90 90° x 90° ⁽¹⁰⁾ 30x10 30° x 10° ⁽¹⁰⁾ 60x10 60° x 10° ⁽¹⁰⁾ 60x30 60° x 30° ⁽¹⁰⁾ 90x10 90° x 10° ⁽¹⁰⁾ W Wide 120° ⁽¹⁰⁾ NAS Narrow Asymmetric WW Asymmetric Wallwash ⁽¹¹⁾ CAS Ceiling Asymmetric ⁽¹⁰⁾	CL Clear Lens ⁽¹²⁾ HFR Half-Frosted Lens ⁽¹³⁾ FR Frosted Lens ⁽¹⁴⁾	NF No Feed Information Required LF Left Feeding Side RF Right Feeding Side

Notes:

1. Available for the Japanese market only.
2. Available for 100_200V voltage option only.
3. Consult your local Sales Representative for PSE certification.
4. Available for PSE Certification only.
5. Consult factory for applications with 305 mm fixtures.
6. Consult factory for applications with PSE Certification.
7. Fixtures are shipped from the factory in Optidrive™ Mode. Normal Mode can be activated onsite for DMX/RDM and LT fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. For LT applications, Optidrive Mode requires a LumentalkID, LumentalkID software and onsite commissioning. Additionally, with Opticolor+™ the white CCT is configurable in the field from 1800K-8000K.

8. Consult factory for DALI8 applications with MRGBWP and a CCT other than 3000K.
9. For best results use a minimum 152 mm setback from surface. Contact factory for application support.
10. Can be combined with a CL or FR lens only.
11. Can be combined with a HFR or FR lens only.
12. When CL lens is combined with NAS or CAS optic, LF or RF feeding side must be specified.
13. When HFR lens is specified, LF or RF feeding side must be specified.
14. When FR lens is combined with WW, NAS or CAS optic, LF or RF feeding side must be specified.

How to Order

Control	Vibration Rating ⁽²¹⁾	Mounting Options ⁽²⁶⁾ ⁽²⁹⁾	Environment	Finish	Accessories ⁽³⁸⁾ ⁽³⁹⁾
DMX/RDM DMX/RDM Enabled ⁽¹⁵⁾ ⁽¹⁶⁾ DALI18 DALI 2 T8 Control ⁽⁸⁾ ⁽¹⁷⁾ LT Lumentalk ⁽¹⁶⁾ ⁽¹⁸⁾ ETX ExtendXTM ⁽¹⁶⁾ ⁽¹⁹⁾ ⁽²⁰⁾	NVR Buildings and Fixed Structures ⁽²²⁾ VRN Pole-Mounts ⁽²³⁾ ⁽²⁴⁾ VRBO Bridges and Overpasses ⁽²⁵⁾	SM Slim Adjustable Mounting Continuously Adjustable (110° Pivot Limit) ⁽²⁷⁾ ⁽²⁸⁾ FX Fixed Mounting (0° Pivot Limit) ⁽³⁰⁾ WMC1 Wall Mounting Continuously Adjustable, 38 mm to Optical Centre (180° Pivot Limit) ⁽²⁸⁾ ⁽³¹⁾ WMI1 Wall Mounting Incrementally Adjustable by 6°, 38 mm to Optical Centre (180° Pivot Limit) ⁽³⁰⁾ WMC3 Wall Mounting Continuously Adjustable, 89 mm to Optical Centre (130° Pivot Limit) ⁽²⁸⁾ ⁽³¹⁾ WMI3 Wall Mounting Incrementally Adjustable by 6°, 89 mm to Optical Centre (130° Pivot Limit) ⁽³⁰⁾ WMC6 Wall Mounting Continuously Adjustable, 152 mm to Optical Centre (170° Pivot Limit) ⁽²⁸⁾ ⁽³²⁾ WMI6 Wall Mounting Incrementally Adjustable by 6°, 152 mm to Optical Centre (170° Pivot Limit) ⁽³³⁾ WMC12 Wall Mounting Continuously Adjustable, 305 mm to Optical Centre (180° Pivot Limit) ⁽²⁸⁾ ⁽³²⁾ WMI12 Wall Mounting Incrementally Adjustable by 6°, 305 mm to Optical Centre (180° Pivot Limit) ⁽³³⁾ WMC18 Wall Mounting Continuously Adjustable, 457 mm to Optical Centre (180° Pivot Limit) ⁽²⁸⁾ ⁽³²⁾ WMI18 Wall Mounting Incrementally Adjustable by 6°, 457 mm to Optical Centre (180° Pivot Limit) ⁽³³⁾ WMC24 Wall Mounting Continuously Adjustable, 610 mm to Optical Centre (180° Pivot Limit) ⁽²⁷⁾ ⁽²⁸⁾ WMI24 Wall Mounting Incrementally Adjustable by 6°, 610 mm to Optical Centre (180° Pivot Limit) ⁽²⁷⁾ ⁽²⁸⁾	XD Extra durable multi-step finish ⁽³⁴⁾	BK Black Sandtex® BRZ Bronze Sandtex® SI Silver Sandtex® WH Smooth White BKTX Textured Black BRZTX Textured Bronze Non-Metallic GRATX Textured Medium Grey GRNTX Textured Green WHTX Textured White CC Custom Colour & Finish ⁽³⁵⁾ ⁽³⁶⁾ ⁽³⁷⁾	NA No Accessory LV Radial Louver ⁽²⁷⁾ ⁽⁴⁰⁾ LVAS Radial Louver Asymmetric ⁽²⁷⁾ VS Visor ⁽²⁷⁾ SH Shield ⁽²⁷⁾ ⁽⁴¹⁾

Notes:

8. Consult factory for DALI18 applications with MRG8WP and a CCT other than 3000K.
15. A Control Box (CBX) and LumenID (LID) must be specified.
16. Minimum dimming value is less than 1%.
17. DALI 2 T8 controller required, provided by others. DALI2 T8 control uses a single DALI short address.
18. A Lumentranslator 2 (LTL2) and LumentalkID (LIDL2) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.
19. An Ethernet CBX is required. Refer to the ETX configuration in the Ethernet CBX Specification Sheet for details.
20. ETX Control Option is not compatible with LFTJ T-Junction Accessory.
21. Consult factory for vibration rating requirements on vertical installations.
22. Available for all mounting options.
23. Available for FX, WMC1, WMI1, WMC3 and WMI3 mounting options when combined with VRN vibration rating. All other mounting options may have installation limitations, and a review is needed for approval. Consult factory.
24. Consult factory for pole mounting accessories.
25. Available for FX, WMI1, and WMI3 mounting options when combined with VRBO vibration rating. All other mounting options may have installation limitations, and a review is needed for approval. Consult factory.
26. One mounting bracket provided for 305 mm fixtures. Two mounting brackets provided for 610 mm, 914 mm and 1219 mm fixtures.
27. Available with NVR vibration rating only. Installation limitations may apply for other vibration rating options, and a review is needed for approval. Consult factory.

28. Not suitable for bridge and overpass applications.
29. Two mounting brackets provided for each fixture length.
30. Vibration tested in accordance with ANSI 136.31 2018 at 3Gv.
31. Vibration tested in accordance with ANSI 136.31 2018 at 1.5Gv.
32. Vibration tested in accordance with ANSI 136.31 2018 at 2.3Gv.
33. Vibration tested in accordance with ANSI 136.31 2018 at 4.6Gv.
34. Zirconium pretreatment completed with corrosion-resistant primer and electrostatically-applied powder coat paint finish.
35. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colours with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colours, other RAL textures and glosses, or to match alternate colour charts. Final colour matching results may vary.
36. Setup charges apply for RAL colours. Consult factory for details.
37. Longer lead times can be expected for custom RAL colour finishes.
38. SH accessory can be combined with LV, LVAS or VS accessories. All other combinations are not possible.
39. The exterior finish of the accessory will match the finish specified in the fixture order code (interior surface painted matte black).
40. Available for 10x10, 10x30, 10x60, 10x90, 30x30, 30x60, 30x90, 60x60, 90x90, 30x10, 60x10, 60x30, 90x10 and W optics only.
41. Not suitable for bridge and overpass applications. The Shield can be installed in zones with wind speeds up to 193 km/h. Consult factory for zones with wind speeds higher than 193 km/h.