


B4 FOURflex SF28

Flexible neon LED Series

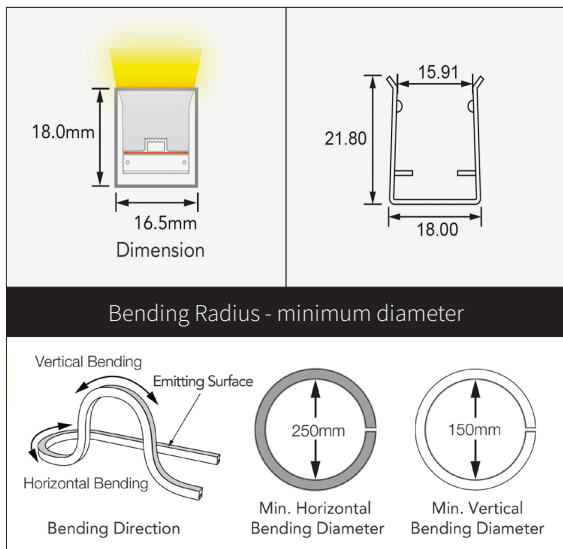

Features


- IP67, UV stabilised silicone flexible LED with (dot-free illumination)
- Customised lengths (made to order)
- Flexible mounting channel for straight and curved applications
- UV, flame and saltwater resistant
- Suitable for interior & exterior applications

Specifications

Material	UV Stabilised Silicone
Mounting	Surface / Recessed
Bending Plane	Horizontal & Vertical
Wattage	13W/m
Lumen Output	<775lm/m
LED Binning	SDCM<3
Colour Temp	2200K / 2700K / 3000K / 3500K / 4000K
CRI	80+ / 90+
Beam Angle	120°
Max Run Length	7m Single Feed / 14m Double Feed
Cut Length	83.3mm
LED	72 LEDs/m
Bending Radius	250mm (horizontal diameter) / 150mm (vertical diameter)
IK Rating	IK08
IP Rating	IP67 / IP68 with injection molded feed
Dimming	Fixed Output / Phase / 1-10V / DALI-2 / Casambi
Power	24V DC Remote power supply
Warranty	5 Years
Accessories	Stainless Steel Flexible Mounting Channel

B4 FOURflex SF28

Flexible neon LED Series


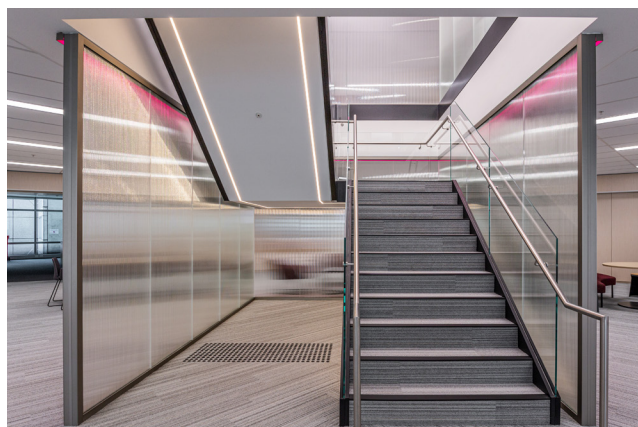


B4 SF28 - (example specification text)

B4 FOURflex SF28 flexible silicone strip, horizontal & vertical bending, IP65, 3500K Neutral White, 618lm, 13W 72 LEDs per metre, 83.3mm cutting interval, (7m max single feed) c/w flexible mounting channel and remote 24V DALI-2 power supply

Ordering Code and Options

B4-SF28-3D	13W	72LED	83C	935	24V	DALI-2
B4-SF28-3D	Wattage	LED Count	Cutting Increment	Colour Temp	Voltage	Control
	13W - 13W/m	72LED - 72LED's p/m	83C - 83.3mm	922 - 2200K 90>CRI 927 - 2700K 90>CRI 930 - 3000K 90>CRI 935 - 3500K 90>CRI 940 - 4000K 90>CRI	24V - 24V DC	ND - Non dim PD - Phase dim DALI-2 - DALI-2 1-10V - 1-10V CAS - Casambi

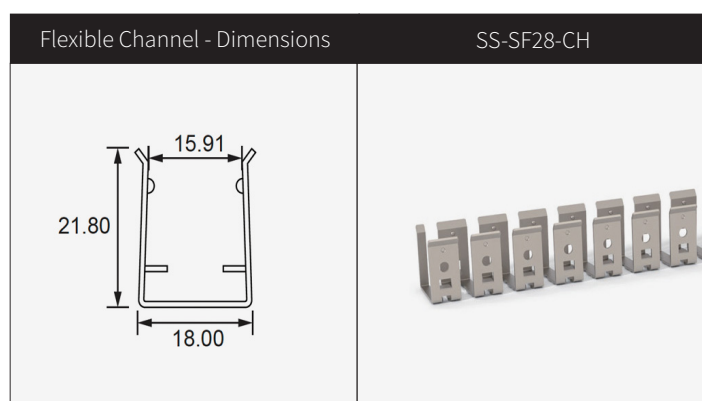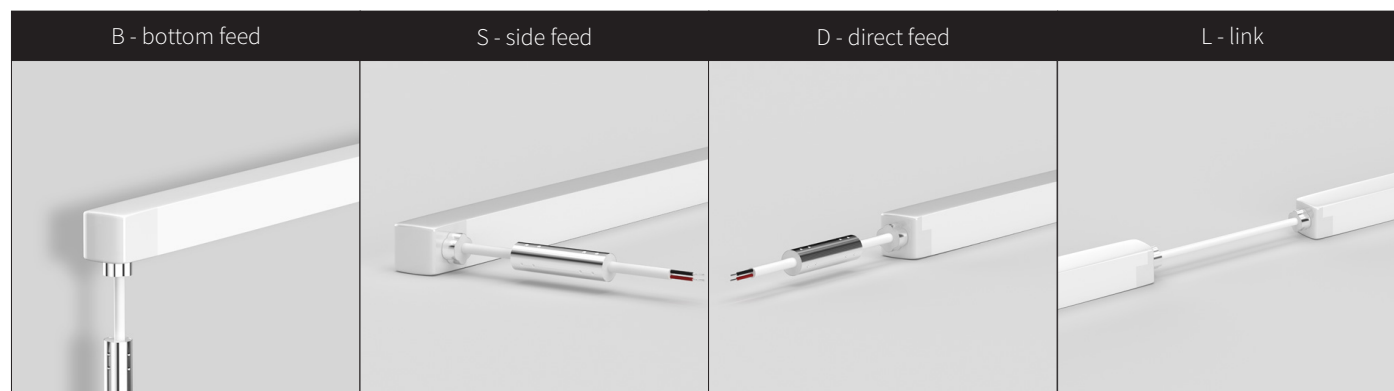

Technical Information

CCT	13W/m
2200K	<510lm/m
2700K	<582lm/m
3000K	<775lm/m
3500K	<618lm/m
4000K	<633lm/m