


Smart Lotis Recessed 48 Outdoor 1x HO IP55 LED Medium DE


139100XX

1


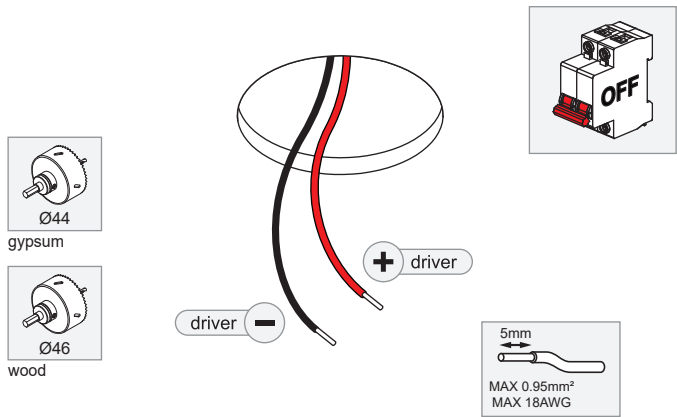


ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	7,5	9,5	3,0
500	7,8	9,8	4,4
 RED		 BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			



Minimum volume requirement

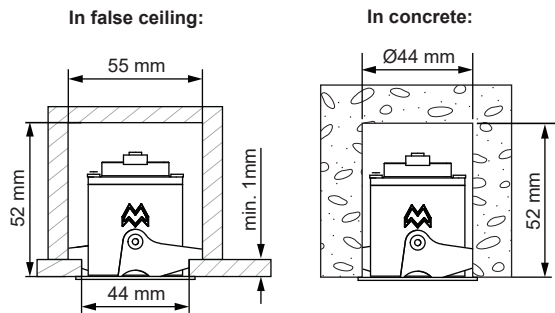

2

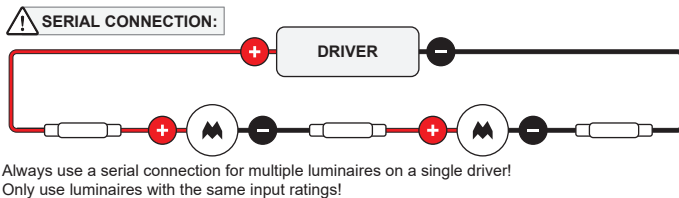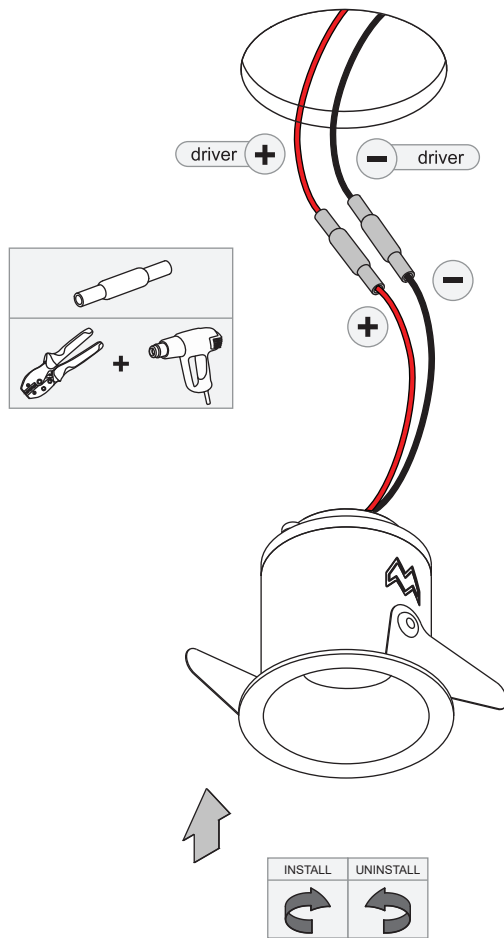

3



NOT SUITABLE FOR INSTALLATION
≤5KM FROM THE COAST

