
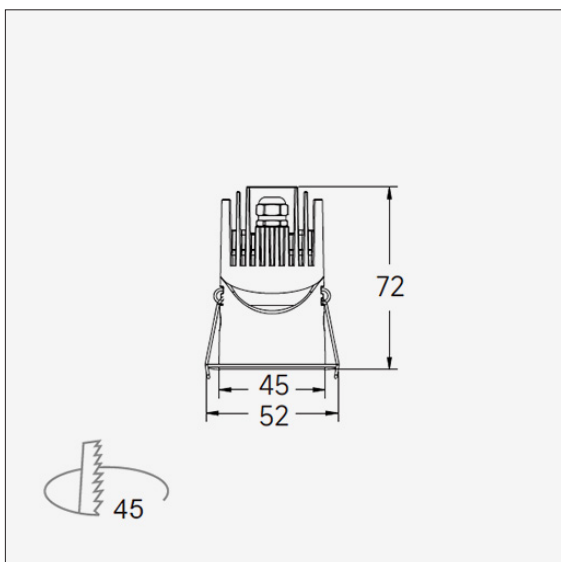


# B4 FOURdown Pro 45

## Architectural Recessed Downlight Range

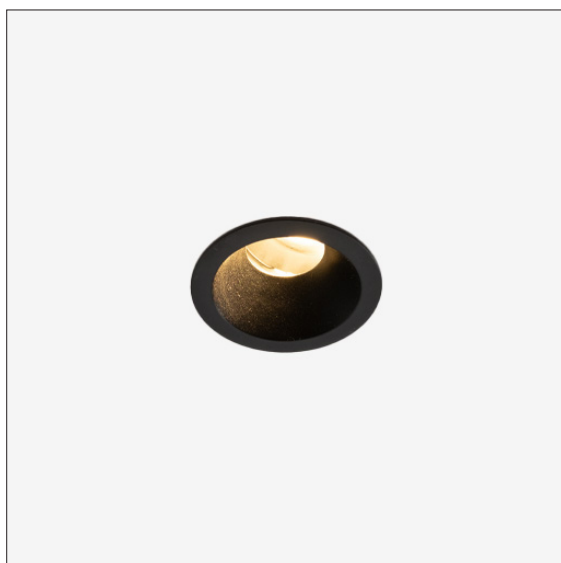


### Features

- IP54 as standard
- Adjustable as standard with 0-30° tilt
- TIR lens available in 4 beam angles
- Optional honeycomb louvre
- Suitable for interior & exterior applications

### Specifications

|                     |                                                 |
|---------------------|-------------------------------------------------|
| <b>Mounting</b>     | Recessed                                        |
| <b>Wattage</b>      | Fixed & Adjustable                              |
| <b>Wattage</b>      | 6W / 3.5W (IC-4 Rated)                          |
| <b>Lumen Output</b> | 6W <490lm / 3.5W <280lm                         |
| <b>LED Binning</b>  | SDCM<3                                          |
| <b>Colour Temp</b>  | 2700K / 3000K / 3500K / 4000K                   |
| <b>CRI</b>          | >90                                             |
| <b>Beam Angle</b>   | 20° / 25° / 35° / 45°                           |
| <b>Cut-out</b>      | 45mm diameter                                   |
| <b>Lifetime</b>     | L80B10 @ 50,000hrs                              |
| <b>UGR</b>          | <19                                             |
| <b>LED</b>          | Bridgelux                                       |
| <b>IP Rating</b>    | IP54                                            |
| <b>Dimming</b>      | Fixed Output / Phase / 1-10V / DALI-2 / Casambi |
| <b>Power</b>        | Remote constant current driver                  |
| <b>Warranty</b>     | 5 Years                                         |
| <b>Accessories</b>  | Honey comb louvre                               |

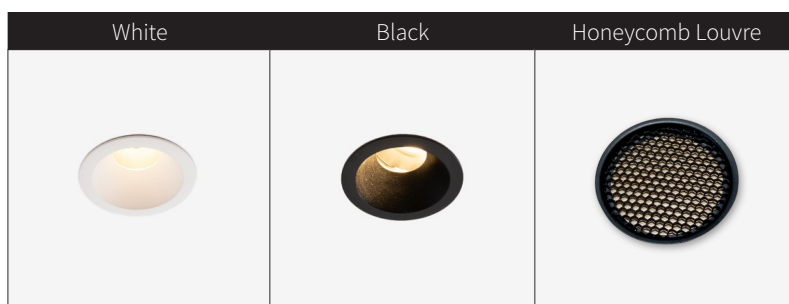

### Ordering Code and Options

| B4-FP45          | 6W                                                                     | 35                                                                               | 930                                                                                                     | WB                                                                                 | DALI                                                                       | HC                                |
|------------------|------------------------------------------------------------------------|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------|
| Size             | Wattage                                                                | Beam                                                                             | Colour temp                                                                                             | Finish                                                                             | Control                                                                    | Accessory                         |
| 45 - 45mm cutout | 6W - 6W (180mA)<br>3.5W - 3.5W (100mA)<br><i>** 3.5W is IC-4 rated</i> | 20 - 20° TIR Lens<br>25 - 25° TIR Lens<br>35 - 35° TIR Lens<br>45 - 45° TIR Lens | 927 - 2700K warm white<br>930 - 3000K warm white<br>935 - 3500K neutral white<br>940 - 4000K cool white | WB - White / Black Baffle<br>BB - Black / Black Baffle<br>RAL - RAL / Black Baffle | ND - Non dim<br>1-10V - 1-10V<br>DALI - DALI<br>DMX - DMX<br>CAS - Casambi | NA - N/A<br>HC - Honeycomb louvre |