

B4 FOURdown Pro 75

Architectural Recessed Downlight Range





Features

- IP54 as standard
- Adjustable as standard with 0-30° tilt
- TIR lens available in 4 beam angles
- Optional honeycomb louvre
- Suitable for interior & exterior applications

Specifications

Mounting	Recessed
Wattage	Fixed & Adjustable
Wattage	12W / 8W / 6.5W (IC-4 Rated)
Lumen Output	12W <1090lm / 8W <830lm / 6.5W <650lm
LED Binning	SDCM<3
Colour Temp	2700K / 3000K / 3500K / 4000K
CRI	>90
Beam Angle	20° / 25° / 35° / 50°
Cut-out	75mm diameter
Lifetime	L80B10 @ 50,000hrs
UGR	<19
LED	Bridgelux
IP Rating	IP54
Dimming	Fixed Output / Phase / 1-10V / DALI-2 / Casambi
Power	Remote constant current driver
Warranty	5 Years
Accessories	Honey comb louvre

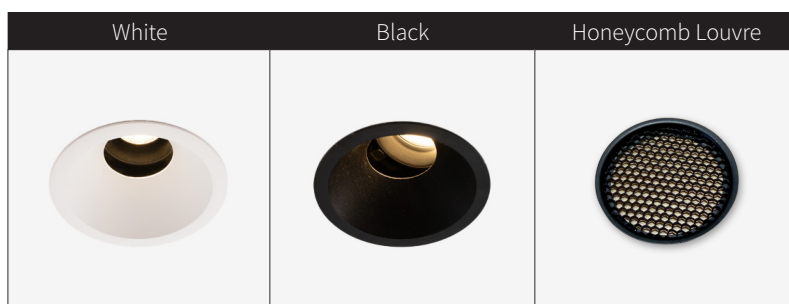

Ordering Code and Options

B4-FP75	6W	35	930	WB	DALI	HC
Size	Wattage	Beam	Colour temp	Finish	Control	Accessory
75 - 45mm cutout	12W - 12W (350mA) 8W - 8W (250mA) 6.5W - 6.5W (200mA) <i>** 6.5W is IC-4 rated</i>	20 - 20° TIR Lens 25 - 25° TIR Lens 35 - 35° TIR Lens 50 - 50° TIR Lens	927 - 2700K warm white 930 - 3000K warm white 935 - 3500K neutral white 940 - 4000K cool white	WB - White / Black Baffle BB - Black / Black Baffle RAL - RAL / Black Baffle	ND - Non dim 1-10V - 1-10V DALI - DALI DMX - DMX CAS - Casambi	NA - N/A HC - Honeycomb louvre