


B4 FOURline IL30

Joinery Light Series

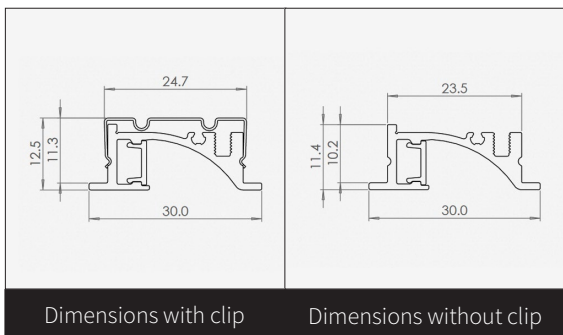

Features

- Designed to provide light where its needed with the diffuser hidden from view for indirect lighting and (dot-free illumination)
- Customised lengths (made to order) or kit form
- Concealed mounting clips
- Anodised Silver / Powdercoat White RAL9003 / Black RAL9005

Specifications

Finish	Anodised Silver / Powdercoat White RAL9003 / Black RAL9005
Mounting	Recessed
Wattage	9.6W/m / 14.4W/m
Lumen Output	<440lm/m (9.6W) / <659lm/m (14.4W) @4000K
LED Binning	SDCM<3
Colour Temp	2700K / 3000K / 3500K / 4000K / Tunable White (On Request)
CRI	90+
Beam Angle	Asymmetric
Max Run Length	5m Single Feed
Cut Length	50mm (9.6W) / 33.3mm (14.4W)
LED	140 LEDs/m (9.6W) / 210 LEDs/m (14.4W)
IP Rating	IP20
Dimming	Fixed Output / Phase / 1-10V / DALI-2 / Casambi
Power	24V DC Remote power supply
Warranty	5 Years
Accessories	Invisible Mounting Clip / Flanged or Flat end caps

B4 FOURline IL30

Joinery Light Series





B4 IL30 - (example specification text)

B4 FOURline IL30 Invisible Line 30 recessed aluminium LED profile, Black RAL9005 finish, opal PMMA diffuser, ultra thin high output strip 9.6w 140Leds Per/m 3000K, CRI>90 3 SDCM, <390lm IP20, 50mm cutting intervals, (max run 5m) c/w endcaps, mounting clips, 500mm tail & remote 24V DALI-2 power supply

Ordering Code and Options

B4-FL-IL30	10W	140LED	50C	935	24V	BLK	DALI-2
B4-FL-IL30	Wattage	LED Count	Cutting Interval	Colour Temp	Voltage	Finish	Control
	10W - 9.6W/m	140LED - 140LED's p/m	50C - 50mm	927 - 2700K 90>CRI	24V - 24V DC	BLK - Black RAL9005	ND - Non dim
	15W - 14.4W/m	210LED - 210LED's p/m	83C - 83.3mm	930 - 3000K 90>CRI		WH - White RAL9003	PD - Phase dim
				935 - 3500K 90>CRI		SIL - Anodised Silver	DALI-2 - DALI-2
				940 - 4000K 90>CRI			1-10V - 1-10V
				* TW on request			CAS - Casambi

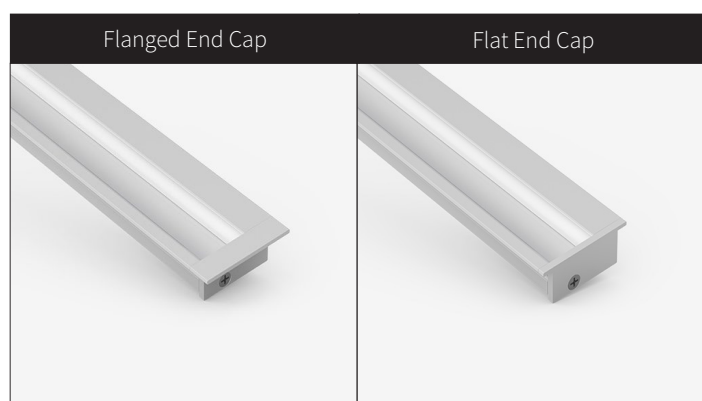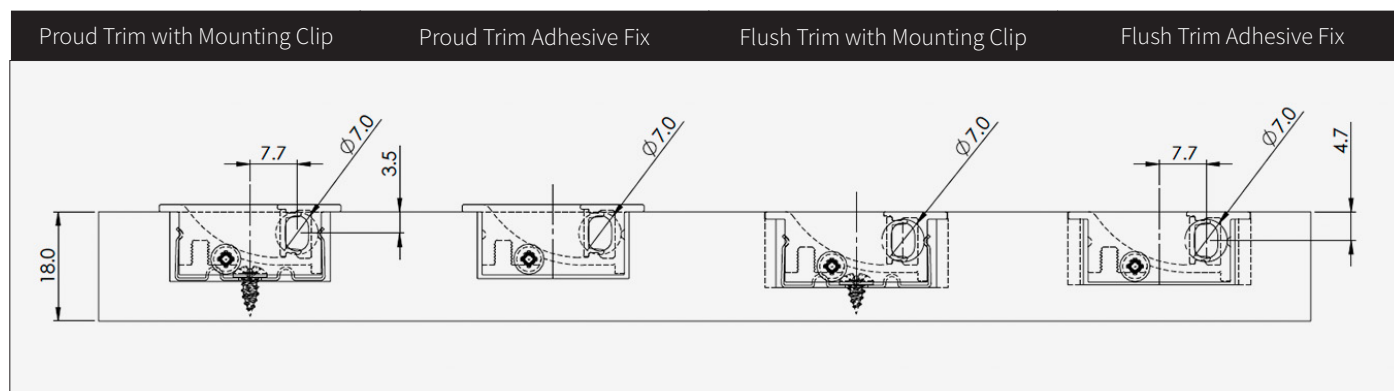

Lumen Output

CCT	9.6W/m	14.4W/m
2700K	<400lm/m	<596lm/m
3000K	<409lm/m	<609lm/m
3500K	<425lm/m	<634lm/m
4000K	<440lm/m	<659lm/m

* Based on White Finish