


B4 FOURtrack 48V HT29

48V Suspended track

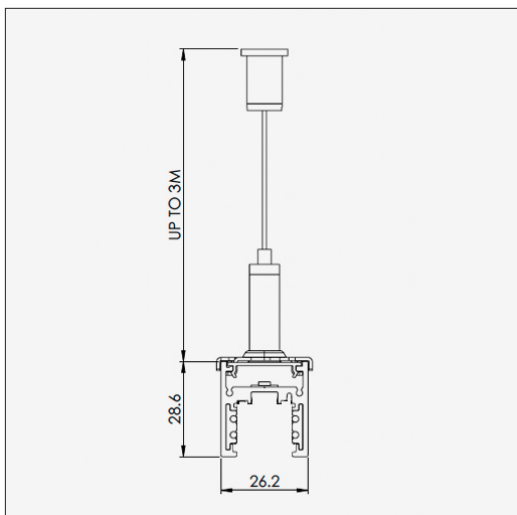

Features

- Slim 48V H track with high-output indirect lighting and inline 48V controller
- Standard 1000mm, 2000mm & 3000mm (cut to size on site)
- Opal, clear and micro-prismatic diffuser options
- Powdercoat White RAL9016 / Black RAL9005 textured finish
- 48V track for use with a range of spotlights

Specifications

Finish	Powdercoat White RAL9016 / Black RAL9005
Mounting	Suspended
Wattage	10W/m / 20W/m
Lumen Output	<971lm/m (10W) / <1942lm/m (20W) @4000K
LED Binning	SDCM<3
Colour Temp	2700K / 3000K / 3500K / 4000K / Tunable White 1800-4000K
CRI	90+
Optic	Opal diffuser / Clear diffuser / Micro-prismatic diffuser
Max Run Length	5m Single Feed 20W / 10m Single Feed 10W per controller
Cut Length	100mm
IP Rating	IP20
Dimming	DALI
Power	48V DC Remote power supply
Warranty	5 Years
Accessories	3m Suspension / Blank cover

B4 FOURtrack 48V HT29

48V Suspended track




B4 HT29 - (example specification text)

B4 FOURtrack 48V HT29 suspended shallow H track, black finish, opal diffuser, 20W 3000K, CRI>90 3 SDCM, <1428lm indirect uplight, IP20, 100mm cutting intervals, c/w endcaps, 3m quick fix suspension, integral DALI controller & remote 48V power supply

Ordering Code and Options

B4-48-HT29	20W	OP	930	48V	BLK	DALI
B4-48-HT29	Wattage	Diffuser	Colour Temp	Voltage	Finish	Control
	10W - 10W/m	OP - Opal	927 - 2700K 90>CRI	48V - 48V DC	BLK - Black	DALI - DALI
	20W - 20W/m	CL - Clear	930 - 3000K 90>CRI		WH - White	
	20W - 20W/m *	MP - Micro-prismatic	935 - 3500K 90>CRI			
	* Tunable White Only		940 - 4000K 90>CRI			
			TW - 1800-4000K 90>CRI			

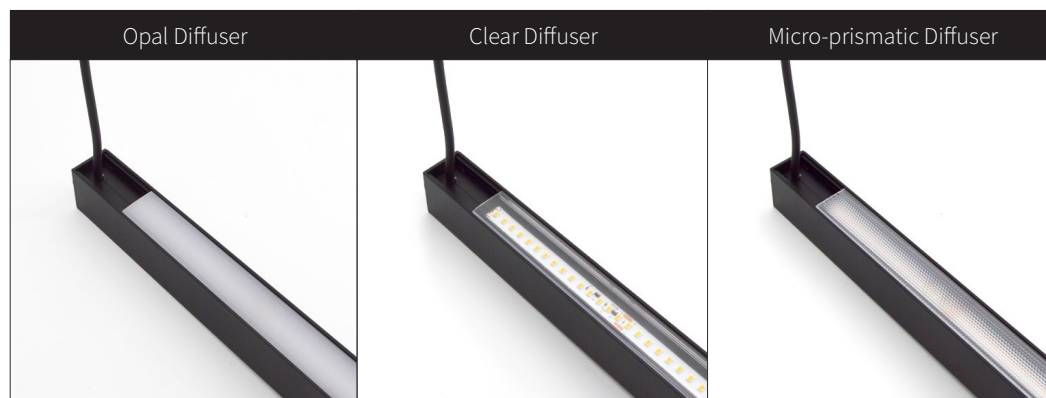

Lumen Output

	Opal Diffuser			Clear Diffuser			Micro-prismatic Diffuser		
CCT	10W/m	20W/m	20W/m	10W/m	20W/m	20W/m	10W/m	20W/m	20W/m
2700K	<714lm/m	<1428lm/m		<956lm/m	<1912lm/m		<2440lm/m	<1538lm/m	
3000K	<687lm/m	<1374lm/m		<919lm/m	<1839lm/m		<720lm/m	<1479lm/m	
3500K	<717lm/m	<1434lm/m		<960lm/m	<1920lm/m		<2440lm/m	<1544lm/m	
4000K	<747lm/m	<1495lm/m		<971lm/m	<1942lm/m		<2440lm/m	<1563lm/m	
1800-4000K		<1300lm/m**			<1740lm/m**			<1402lm/m**	

** Tunable White each channel