


01 Feature

Optics

Narrow light distribution
(Reflector + Flare cut louver)

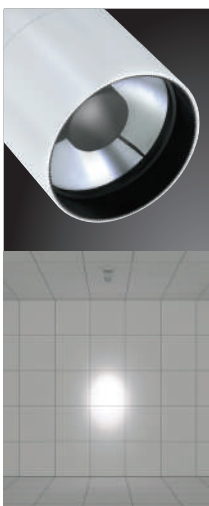

Integrated Driver

Small type can be used with phase dimmers for casual dimming.



Glare Cut angle

The cut-off angle to the lens is 35° in order to reduce glare.




02 Option

For more delicate applications


No option




Spread lens



Diffusion lens



Honeycomb louver



03 Customization

Installation and dimming options



Flange
For surface mounted installation




DALI Integrated Driver
GLOBAL trac NORDIC ALUMINIUM 3CC




0-10V DALI
Customized casing upon request.


Track Spotlight



Body : Die-cast aluminum (matt white/matt black)
Driver : Integrated (Phase dimmable 30-100%)
Louver : Flare-cut louver (black) *Narrow beam only
Weight : 0.8kg
Power consumption : 19.1W



2000^{TYPE}

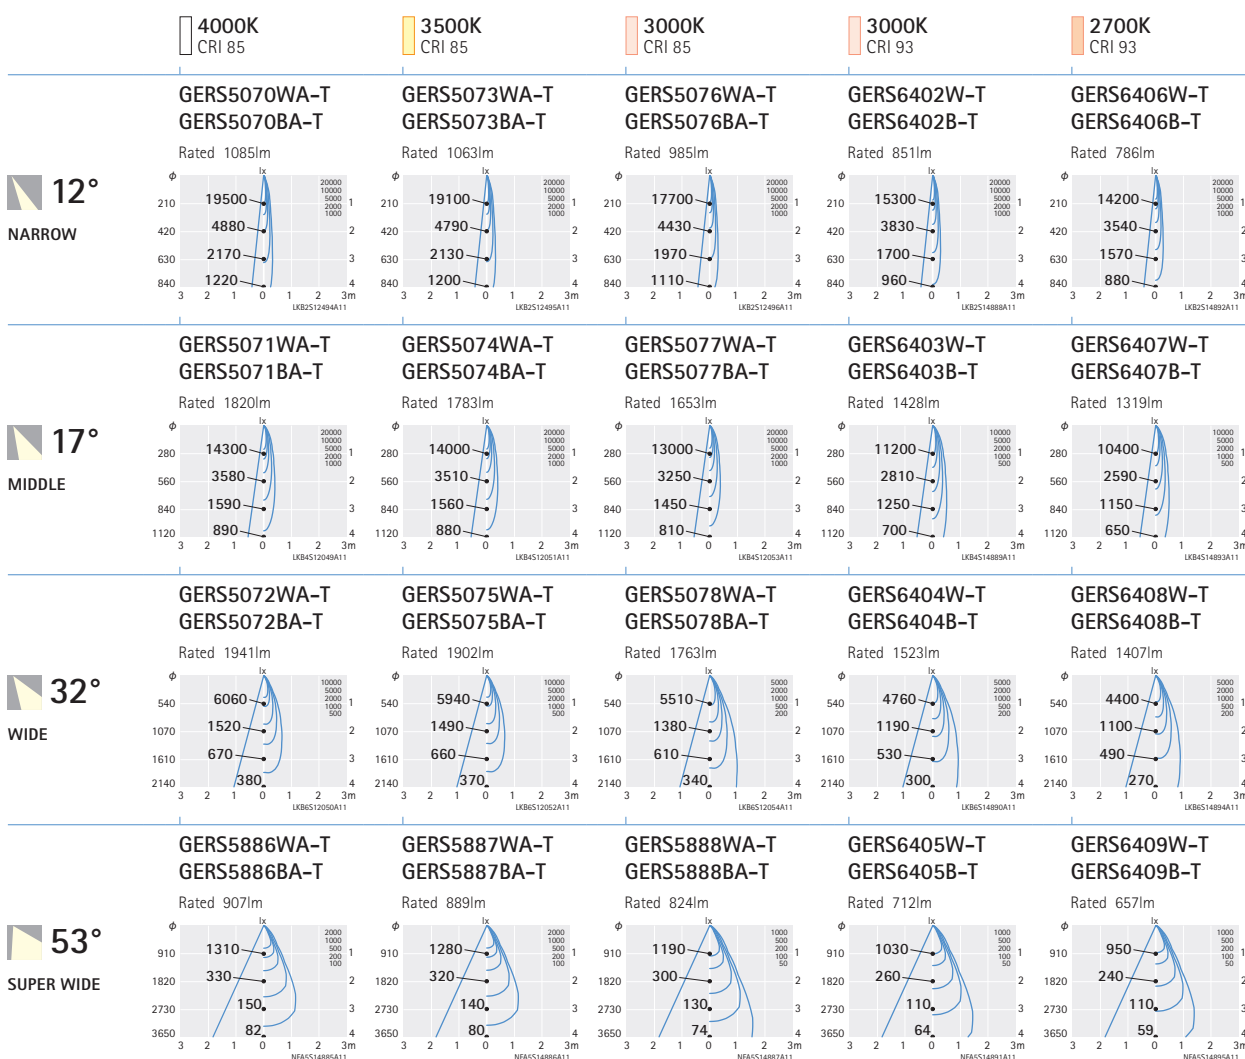

Option

GRB-493F
Spread lens



GRB-490F
Diffusion lens



GRB-487B
Honeycomb louver



* Options can only be used individually.