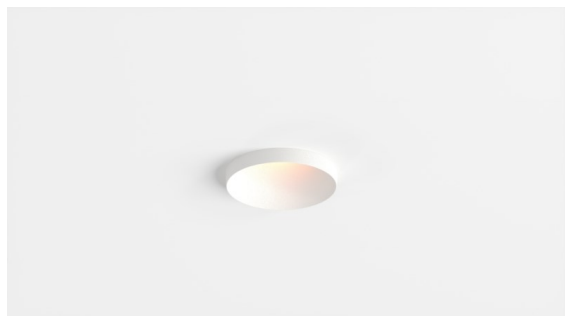


Date



Customer

Project

Type

Kup Recessed 72 1x IP55 LED DE



Kup is a refined round recessed spotlight that brings character to the ceiling through its distinctive raised edge and expressive cup-shaped design. Behind its pure Ø72 form lies an extensive optical platform, offering the flexibility to highlight both objects and spaces with precision. Extensive finish and colour personalisation options allow Kup to adapt effortlessly to any interior

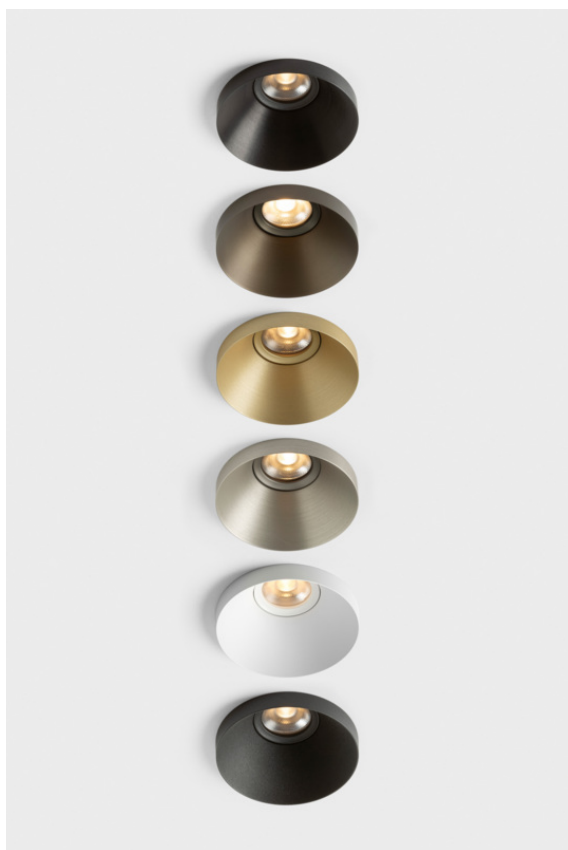


Specifications

Material	
Light Source Type	LED
LED Type	CREE XHP35 HI
LED technology	LED high power
CRI	Min. 90
Colour Temperature	2700K / 3000K / 3500K / 4000K
Lifetime	L90B05 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CRI 98 & 2400K	(On Request)
Binning (SDCM)	3
Light Direction	Down
Optic	Collimator
Measured beam angle (°)	12° / 16° / 25° / 41° / 55°
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø68
Mounting depth (mm)	100.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	White or Black Structure / Champagne, Bronze, Silver Bronze, Black Brushed Anodised
Gross weight (g)	311.0
Drive current (mA)	350 500 700
Min. forward voltage (Vf)	10.7 10.9 11.2
Max. forward voltage (Vf)	12.6 12.8 13.1
Connected load (W)	4.0 5.8 8.3
Luminous flux per lamp (lm)	<395 <539 <711
Efficacy (lm/W)	<96 <88 <81
Glare rating	<24 <25 <26

Installation Accessories



12292630 Gypsum Fibreboard 150x150



11624030 Installation Housing 140x250x100x210

Choose a required accessory