
Shellby Recessed Trimless 176 Alabaster IP55 LED DE


121845XX

1 CHOOSE INSTALLATION ACCESSORY - NOT INCLUDED


Concrete kit 290x280 - Ø177
12182130




Concrete ring Ø177 stand concrete boxes
12182330



Gypkit trimless 290x280 - Ø177
12292930





Recessed ring Ø177
12182230




2









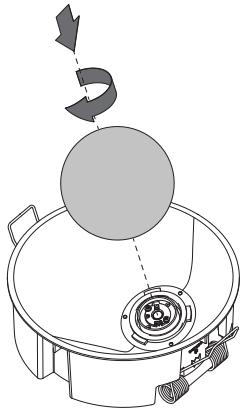


Minimum volume requirement - with driver

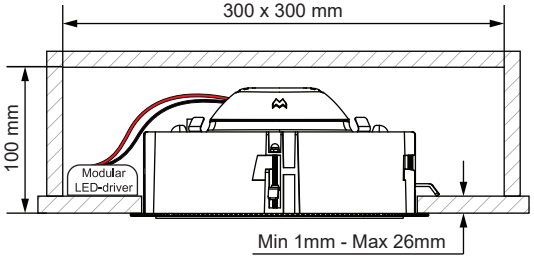



3

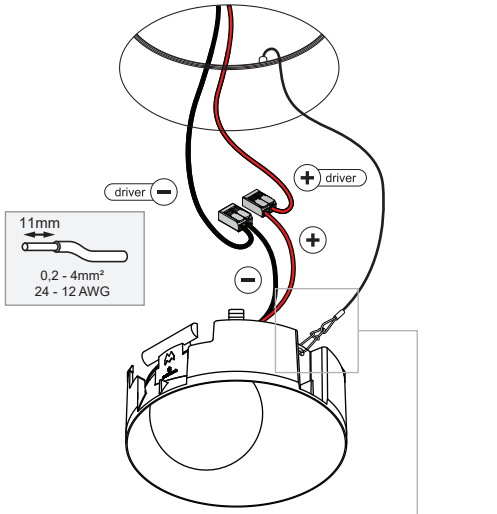


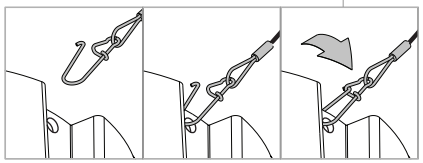

4









WARM DIM
ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	30,6	37	11,8
+ RED		− BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

UNINSTAL

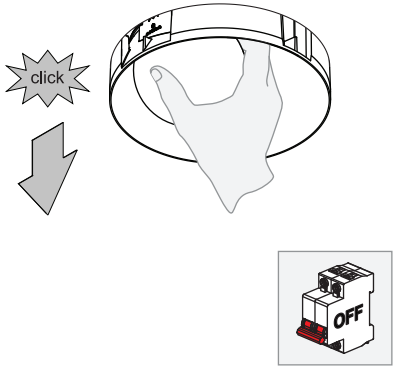



Replace protective shield when broken.
The luminaire shall only be used complete with its protective shield.
Reference number repair kit: 80000626



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source.The light source and/ or driver contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

III IP 55 UK CA CE