

BoscoLighting's Cylinder Outdoor Wall Lights are a great way to elegantly light up your corridors and building exteriors.

Housed in premium aluminium body with black or grey powder coated finish, this LED wall light is suitable for the most severe weather conditions.

Perfect for security, mood and walkways lighting, this cylinder wall light can be used for cafes, homes and courtyards!

Contact our lighting specialist for more information! Samples available upon request.

Features

- Fitting colour: black or grey
- LED driver included
- IP65 rating, weather proof

Customisation Options

- may be subject to minimum order quantities

- Fitting colour can be customised
- Colour temperature options can be RGB colour changing or single colours



Wall Light (UpDown) CYL





Specs


Connect: Insulated Cable

Dimming: Non-dim*

*For any dimming request, drivers may not fit within the fitting, supplied with an external driver.

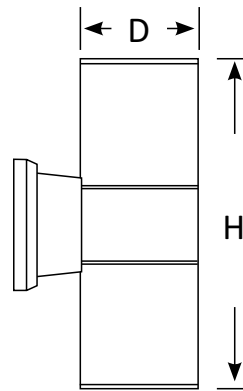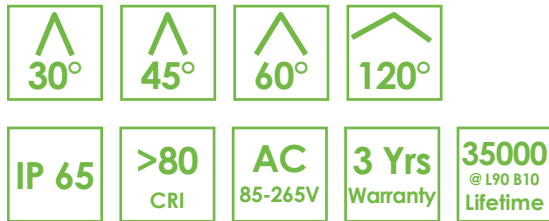

(Side View)



(Front View)



BLWL-CYL-03X2

3W*2 Updown wall light
Luminous Flux (lm): 510
CCT: Whites(3000K-6000K)
Dimensions (mm): D65*H260
Weight(kg): 0.7



BLWL-CYL-06X2

6W*2 Updown wall light
Luminous Flux (lm): 1000
CCT: Whites(3000K-6000K)
Dimensions (mm): D90*H260
Weight(kg): 1.18



BLWL-CYL-09X2

9W*2 Updown wall light
Luminous Flux (lm):1500
CCT: Whites(3000K-6000K)
Dimensions (mm):D110*H300
Weight(kg): 1.65



BLWL-CYL-12X2

12W*2 Updown wall light
Luminous Flux (lm): 2000
CCT: Whites(3000K-6000K)
Dimensions (mm): D130*H300
Weight(kg): 1.85



BLWL-CYL-18X2

18W*2 Updown wall light
Luminous Flux (lm): 3000
CCT: Whites(3000K-6000K)
Dimensions (mm): D145*H300
Weight(kg): 2.3



BLWL-CYL-24X2

24W*2 Updown wall light
Luminous Flux (lm): 4000
CCT: Whites(3000K-6000K)
Dimensions (mm): D180*H400
Weight(kg): 2.7