

B4 FOURsphere Suspended

Opal suspended ambient sphere

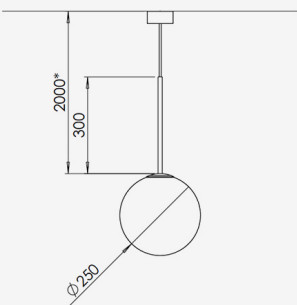
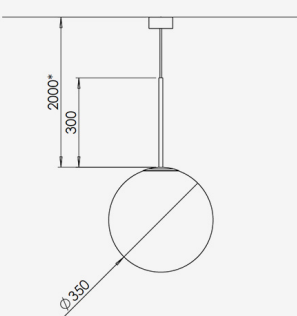
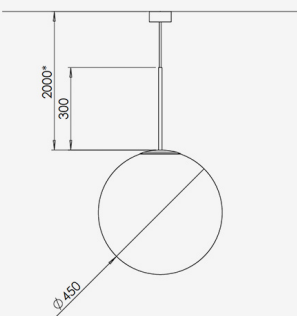
B4 FOURsphere - Opal suspended ambient sphere

- Available in 3 sizes and 3 wattages using dedicated COB LED's
- Opal glass diffuser, top plate finished in black, white or RAL
- Dedicated LED engine with Lumen output options from 342 - 2029lm
- 2700K, 3000K, 3500K & 4000K 90CRI CCT options
- Flex or Fixed Rod mount options
- Supplied with remote Fixed output, 1-10V, DALI or Casambi drivers



B4 FOURsphere Suspended

Opal suspended ambient sphere

FOURsphere Suspended 250		
FOURsphere Suspended 350		
FOURsphere Suspended 450		

FOURsphere Cable Suspended 250

- 8.1W <1093lm delivered @250mA 32.5Vf
- CRI>90 3-SDCM, Bridgelux V10 COB LED
- Opal glass diffuser / IP20
- 2700K, 3000K, 3500K, 4000K
- White / Black or RAL finish

FOURsphere Cable Suspended 350

- 16.5W <1594lm delivered @700mA 23.6Vf
- CRI>90 3-SDCM, Xicato XTM COB LED
- Opal glass diffuser / IP20
- 2700K, 3000K, 3500K, 4000K
- White / Black or RAL finish
- Remote Non dim, 1-10V, Dali or Casambi


FOURsphere Cable Suspended 450

- 25.7W <2029lm delivered @1050mA 24.4Vf
- CRI>90 3-SDCM, Xicato XTM COB LED
- Opal glass diffuser / IP20
- 2700K, 3000K, 3500K, 4000K
- White / Black or RAL finish
- Remote Non dim, 1-10V, Dali or Casambi

		
Black RAL9005 Texture	White RAL9016 Texture	RAL

B4 FOURsphere Suspended

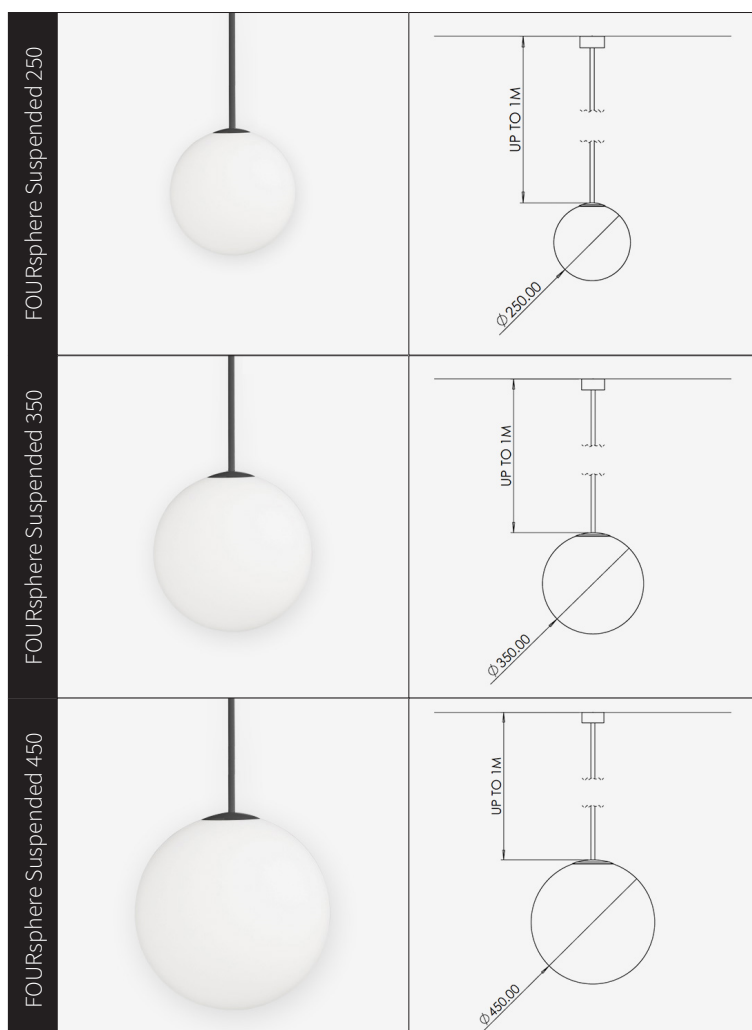Opal suspended ambient sphere



FOURsphere Rod Suspended 250

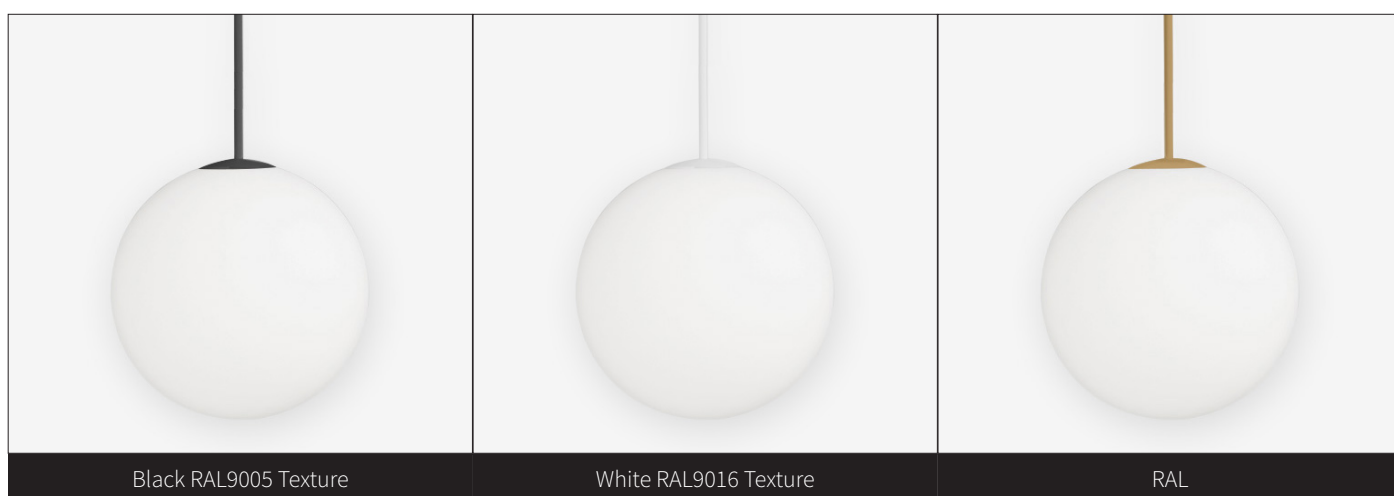
- 8.1W <1093lm delivered @250mA 32.5V
- CRI>90 3-SDCM, Bridgelux V10 COB LED
- Opal glass diffuser / IP20
- 2700K, 3000K, 3500K, 4000K
- White / Black or RAL finish

FOURsphere Rod Suspended 350

- 16.5W <1594lm delivered @700mA 23.6Vf
- CRI>90 3-SDCM, Xicato XTM COB LED
- Opal glass diffuser / IP20
- 2700K, 3000K, 3500K, 4000K
- White / Black or RAL finish
- Remote Non dim, 1-10V, Dali or Casambi

FOURsphere Rod Suspended 450

- 25.7W <2029lm delivered @1050mA 24.4Vf
- CRI>90 3-SDCM, Xicato XTM COB LED
- Opal glass diffuser / IP20
- 2700K, 3000K, 3500K, 4000K
- White / Black or RAL finish
- Remote Non dim, 1-10V, Dali or Casambi



Standard rod length is 1000mm. Rod height can be extended with optional threaded extension pieces. Custom rod heights are also available on request

B4 FOURsphere Suspended

Opal suspended ambient sphere

B4 FOURsphere - Opal Suspended Rod ambient sphere

B4 FOURsphere 350mm Glass Sphere Rod Pendant Mount up to 1000mm, Xicato XTM COB 16.5W 700mA 23.6Vf CRI90 3000K, IP20, Black c/w remote DALI-2 driver

B4-FS	RP	350	16W	930	B	DALI
B4-FS	Version	Size	Wattage	Colour temp	Finish	Control
RP - Rod Suspended FP - Flex Suspended		250 - 250mm dia	250	927 - 2700K warm white	B - Matt Black	ND - Non dim
		350 - 350mm dia	8.1W - 8W	930 - 3000K warm white	W - Matt White	DALI - Dali
		450 - 450mm dia	350	935 - 3500K neutral white	RAL - RAL	1-10V - 1-10V
			16.5W - 17W	940 - 4000K cool white		CAS - Casambi
			450			
			25.7W - 26W			